



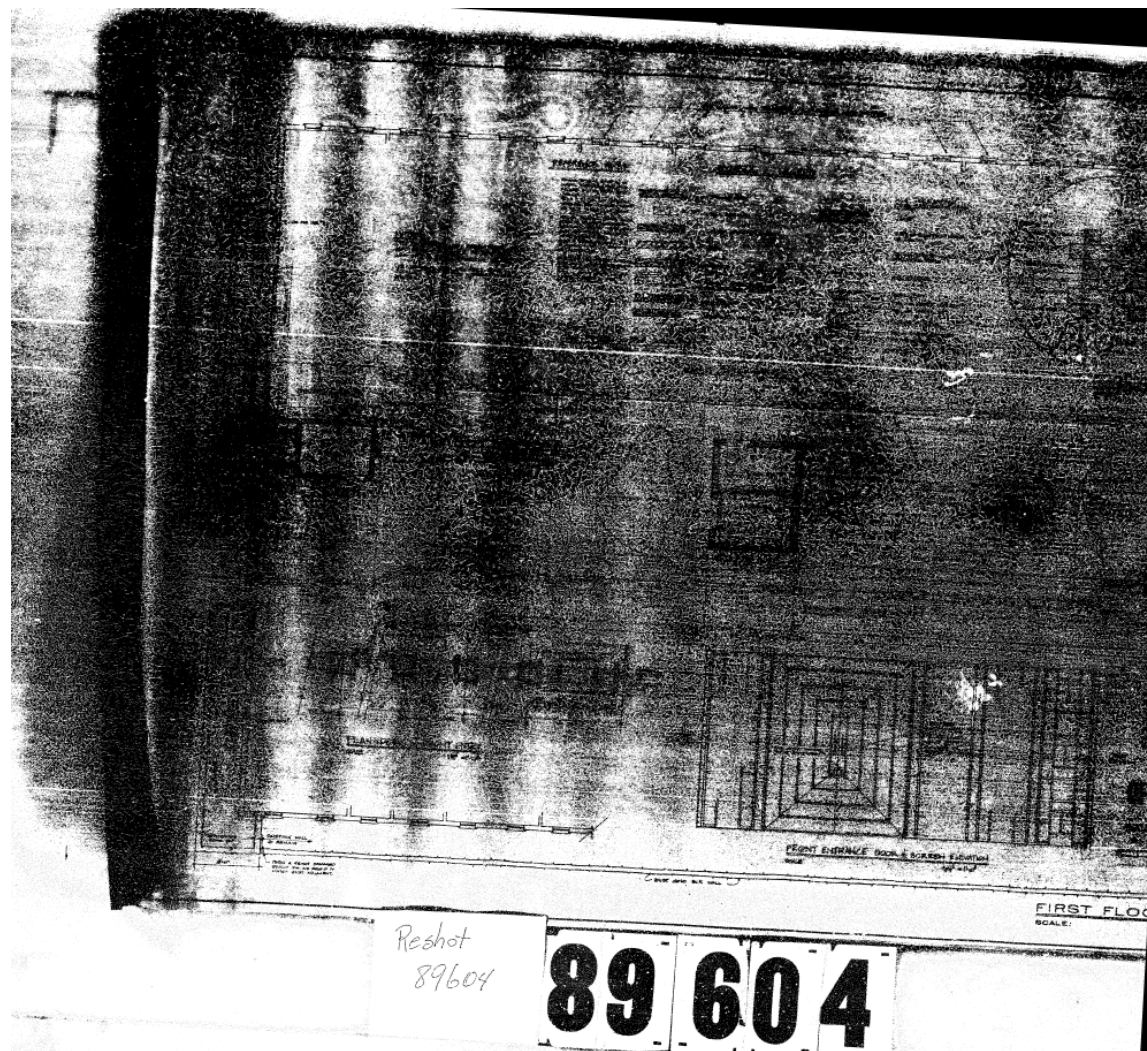

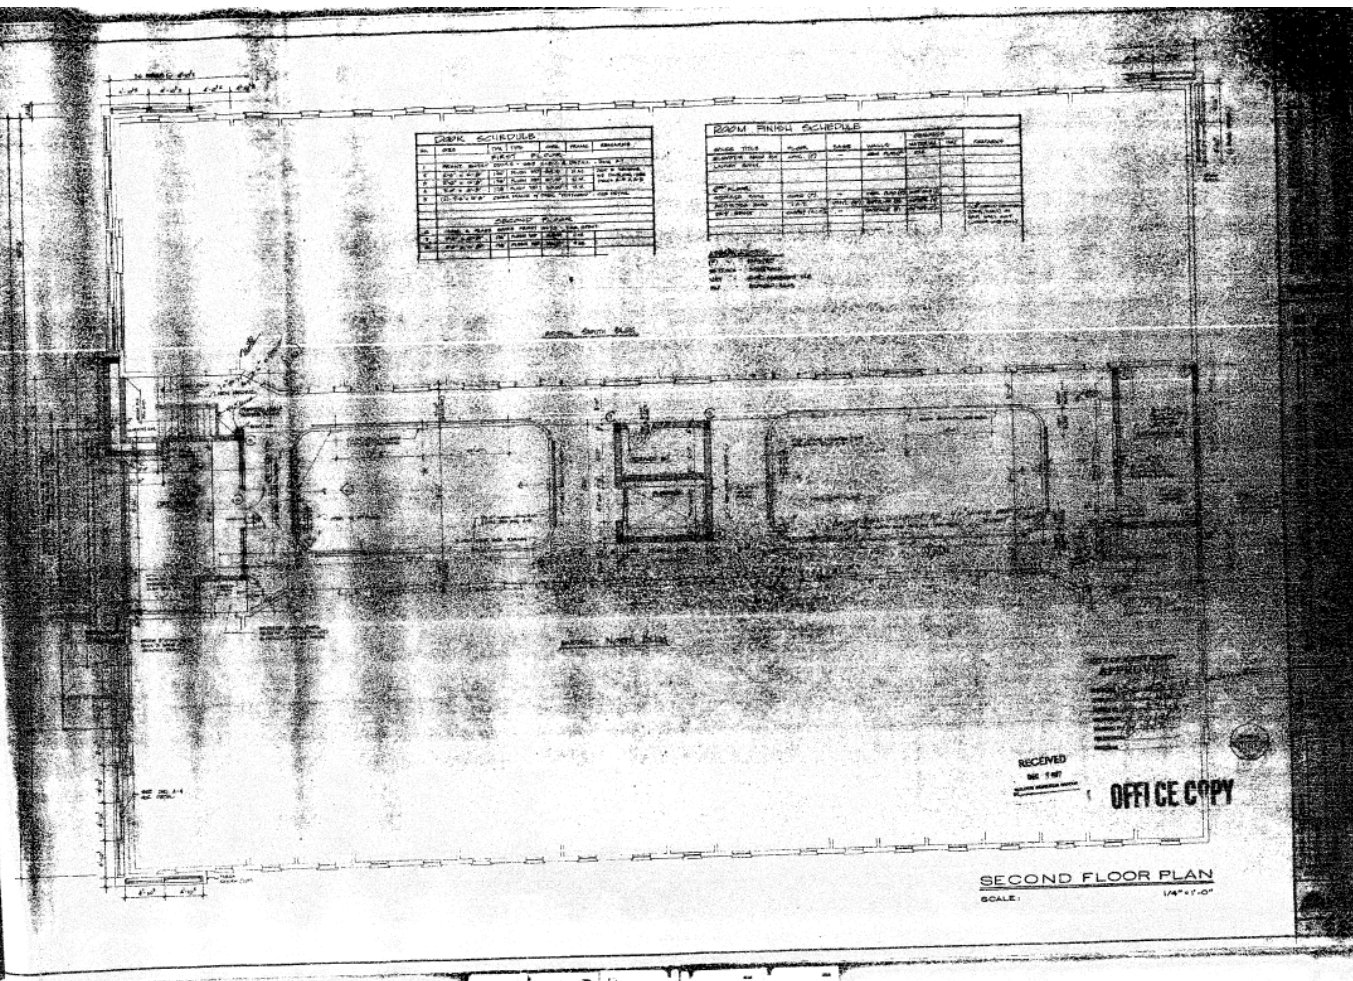



| NO. | ROOM      | FINISH | DATE    | REMARKS |
|-----|-----------|--------|---------|---------|
| 1   | REAR HALL | PAINT  | NOV. 22 | PAINT   |
| 2   | REAR HALL | PAINT  | NOV. 23 | PAINT   |
| 3   | REAR HALL | PAINT  | NOV. 24 | PAINT   |
| 4   | REAR HALL | PAINT  | NOV. 25 | PAINT   |
| 5   | REAR HALL | PAINT  | NOV. 26 | PAINT   |
| 6   | REAR HALL | PAINT  | NOV. 27 | PAINT   |
| 7   | REAR HALL | PAINT  | NOV. 28 | PAINT   |
| 8   | REAR HALL | PAINT  | NOV. 29 | PAINT   |
| 9   | REAR HALL | PAINT  | NOV. 30 | PAINT   |
| 10  | REAR HALL | PAINT  | DEC. 1  | PAINT   |

| NO. | ROOM      | FINISH | DATE    | REMARKS |
|-----|-----------|--------|---------|---------|
| 1   | REAR HALL | PAINT  | NOV. 22 | PAINT   |
| 2   | REAR HALL | PAINT  | NOV. 23 | PAINT   |
| 3   | REAR HALL | PAINT  | NOV. 24 | PAINT   |
| 4   | REAR HALL | PAINT  | NOV. 25 | PAINT   |
| 5   | REAR HALL | PAINT  | NOV. 26 | PAINT   |
| 6   | REAR HALL | PAINT  | NOV. 27 | PAINT   |
| 7   | REAR HALL | PAINT  | NOV. 28 | PAINT   |
| 8   | REAR HALL | PAINT  | NOV. 29 | PAINT   |
| 9   | REAR HALL | PAINT  | NOV. 30 | PAINT   |
| 10  | REAR HALL | PAINT  | DEC. 1  | PAINT   |

RECEIVED  
NOV 21 1947

OFFICE COPY

SECOND FLOOR PLAN  
SCALE: 1/4" = 1'-0"

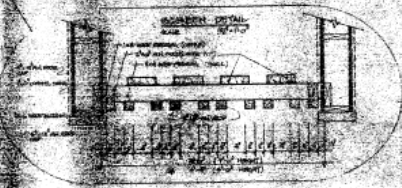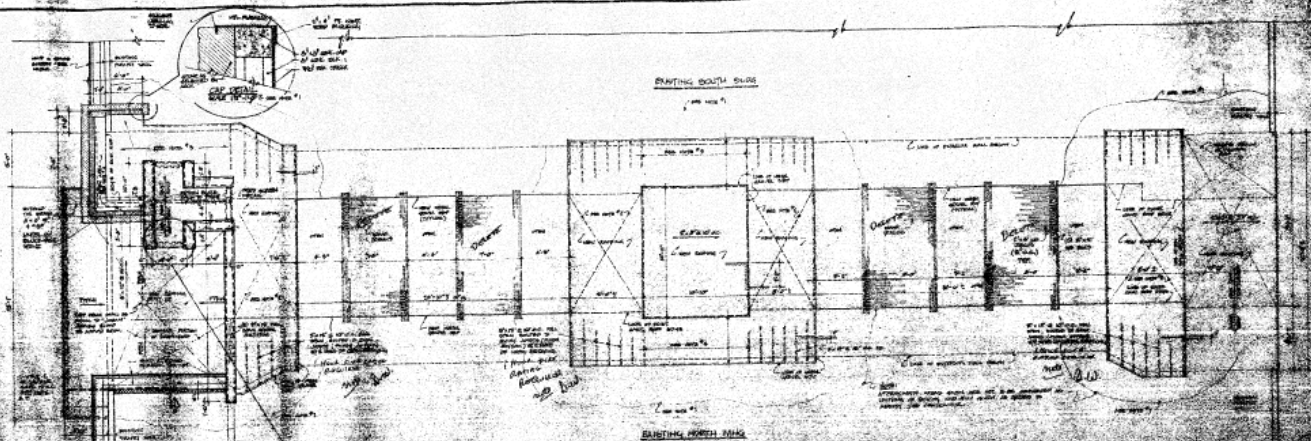


- NOTES**
1. GENERAL: Building of concrete, masonry, and steel. All construction shall conform to the latest edition of the Building Code of the City of New York.
  2. FOUNDATION: Foundation shall be concrete on masonry piers. All foundations shall be designed to carry the full load of the building.
  3. ROOF: Roof shall be flat, with a minimum slope of 1/4" per foot. Roof shall be waterproofed with a minimum of two coats of waterproofing material.
  4. INTERIORS: Interiors shall be finished with plaster or masonry. All walls shall be finished with a minimum of two coats of plaster or masonry.

**OFFICE COPY APPROVED**



DATE: 10/1/50

BY: [Signature]

FOR: [Signature]

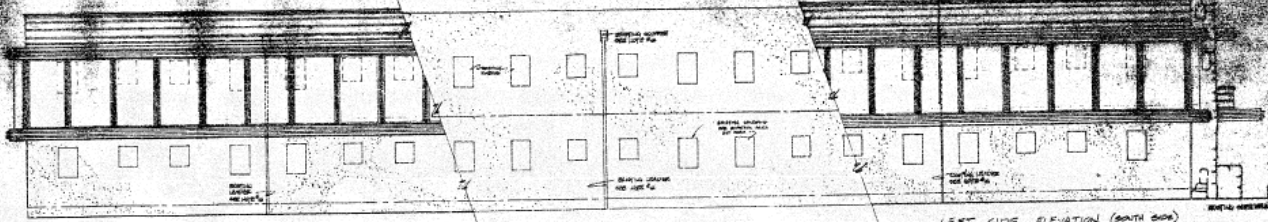


**LEFT SIDE ELEVATION (SOUTH SIDE)**  
SCALE: 1/4" = 1'-0"

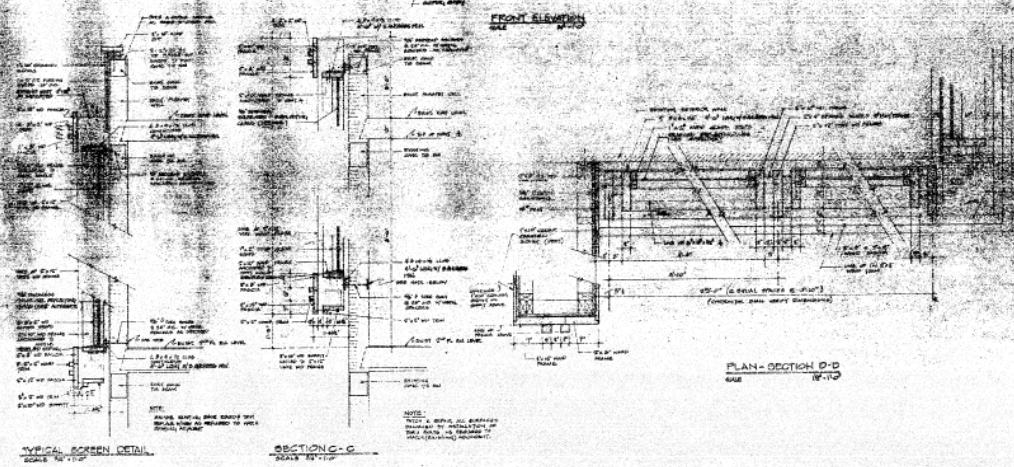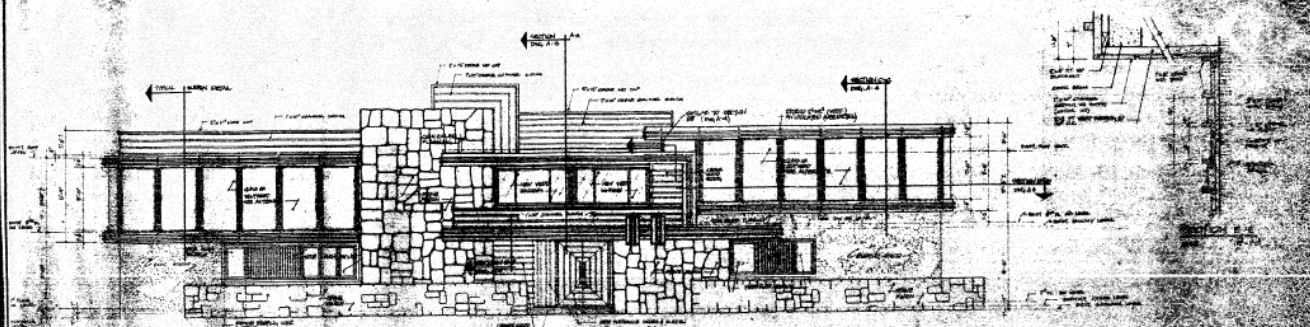



PLAN - SECTION D-D  
SCALE 1/8" = 1'-0"

OFFICE COPY



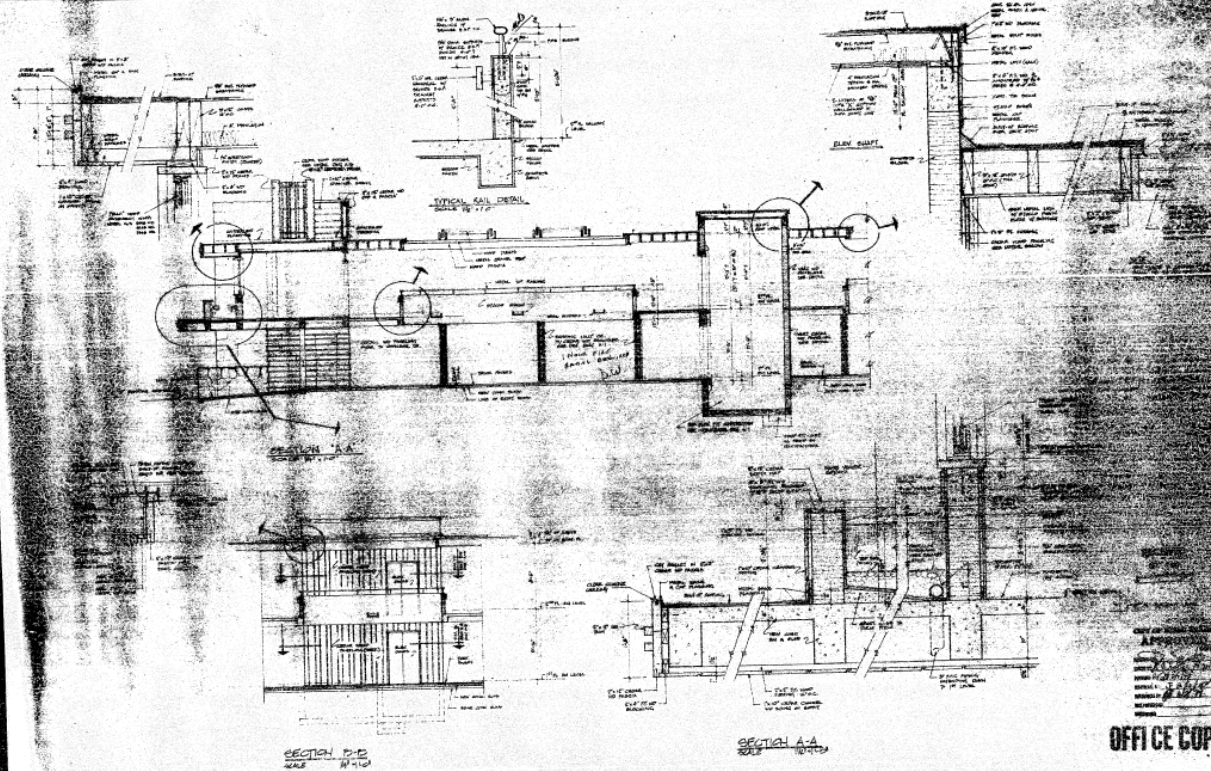

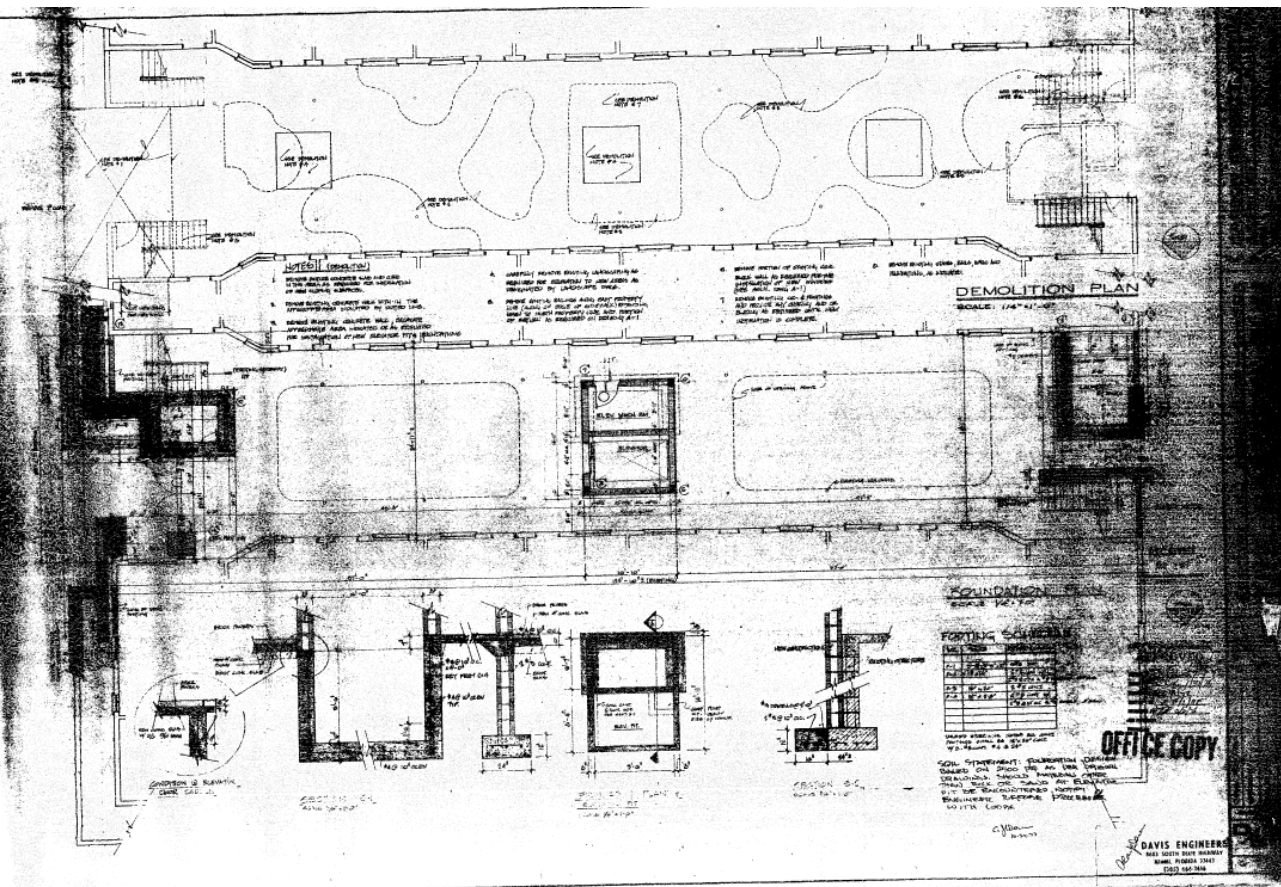

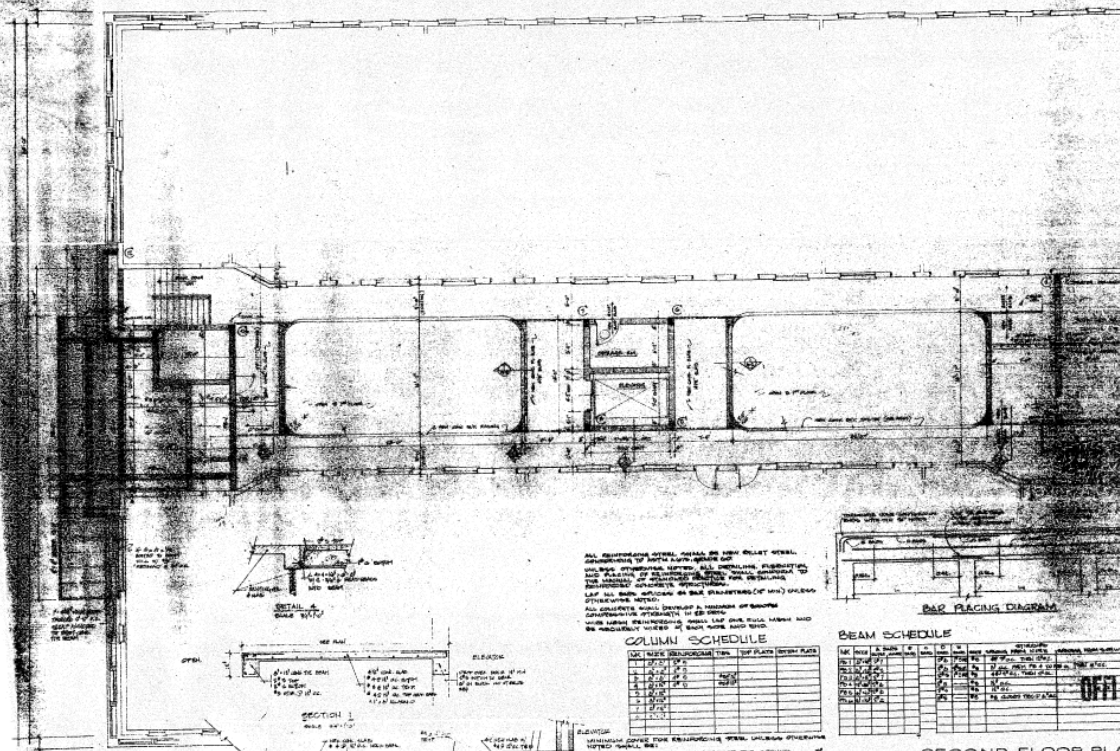

ALL REINFORCING STEEL SHALL BE 100% BILLET STEEL.  
 CONCRETE SHALL BE 3000 PSI STRENGTH.  
 ALL WALLS, PARTITIONS, CEILING, FLOORING, ELEVATION,  
 AND FINISHES SHALL BE AS SHOWN ON THE DRAWING.  
 THE FINISHES OF THE INTERIOR SHALL BE AS SHOWN ON THE DRAWING.  
 THE FINISHES OF THE EXTERIOR SHALL BE AS SHOWN ON THE DRAWING.  
 ALL CONCRETE SHALL BE PLACED IN A MANNER AS TO  
 PREVENT CRACKING OF CONCRETE.  
 ALL REINFORCING STEEL SHALL BE PLACED IN A MANNER AS TO  
 PREVENT CRACKING OF CONCRETE.

#### COLUMN SCHEDULE

| NO. | SECTION | TYPE | SIZE | REMARKS |
|-----|---------|------|------|---------|
| 1   | 1       | 1    | 1    | 1       |
| 2   | 2       | 2    | 2    | 2       |
| 3   | 3       | 3    | 3    | 3       |
| 4   | 4       | 4    | 4    | 4       |
| 5   | 5       | 5    | 5    | 5       |
| 6   | 6       | 6    | 6    | 6       |
| 7   | 7       | 7    | 7    | 7       |
| 8   | 8       | 8    | 8    | 8       |
| 9   | 9       | 9    | 9    | 9       |
| 10  | 10      | 10   | 10   | 10      |

#### BEAM SCHEDULE


| NO. | SECTION | TYPE | SIZE | REMARKS |
|-----|---------|------|------|---------|
| 1   | 1       | 1    | 1    | 1       |
| 2   | 2       | 2    | 2    | 2       |
| 3   | 3       | 3    | 3    | 3       |
| 4   | 4       | 4    | 4    | 4       |
| 5   | 5       | 5    | 5    | 5       |
| 6   | 6       | 6    | 6    | 6       |
| 7   | 7       | 7    | 7    | 7       |
| 8   | 8       | 8    | 8    | 8       |
| 9   | 9       | 9    | 9    | 9       |
| 10  | 10      | 10   | 10   | 10      |

#### SECOND FLOOR PLAN

SCALE: 1/4" = 1'-0"

OFFICE COPY

DAVIS ENGINEERS  
 1000 BUREAU BUILDING  
 1100 N. 1ST ST.  
 ST. LOUIS, MO. 63102

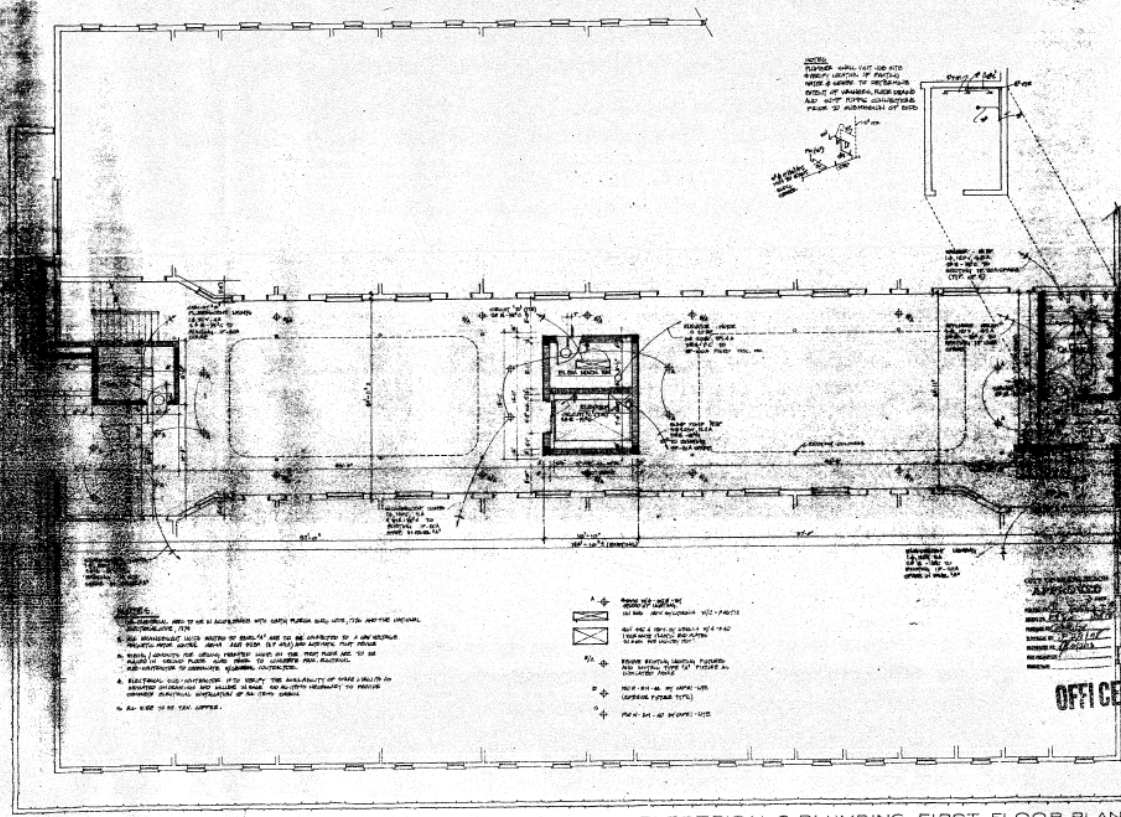

GENERAL AND TO BE IN ACCORDANCE WITH LOCAL PLUMBING CODE, THE NATIONAL ELECTRICAL CODE, AND THE NATIONAL MECHANICAL CODE.

ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED BY A LICENSED MECHANICAL CONTRACTOR AND ALL ELECTRICAL WORK BY A LICENSED ELECTRICAL CONTRACTOR.

ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.

ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.

- 1. ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED BY A LICENSED MECHANICAL CONTRACTOR AND ALL ELECTRICAL WORK BY A LICENSED ELECTRICAL CONTRACTOR.
- 2. ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.
- 3. ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.
- 4. ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.
- 5. ALL MECHANICAL AND ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL MECHANICAL CODE AND THE NATIONAL ELECTRICAL CODE.

APPROVED

DATE

BY

FOR

OFFICE COPY

ELECTRICAL & PLUMBING FIRST FLOOR PLAN

SCALE

DAVIS ENGINEERS

145 SOUTH BAY STREET

MIAMI, FLORIDA 33134





1/8" = 1'-0"

*Davis*

**DAVIS ENGINEERS**  
8081 SOUTH DIXIE HIGHWAY  
MIAMI, FLORIDA 33143  
(305) 666-2816

