

MAP OF BOUNDARY SURVEY

LEGEND


ABBREVIATIONS:

A = ARC DISTANCE
AC = AIR CONDITIONER PAD
BCR = BROWARD COUNTY RECORDS
BLDG = BUILDING
BM = BENCH MARK
BOB = BASIS OF BEARINGS
CBS = CONCRETE BLOCK & STUCCO
(C) = CALCULATED
C&G = CURB & GUTTER
CLF = CHAIN LINK FENCE
COL = COLUMN
D.E. = DRAINAGE EASEMENT
D.M.E. = DRAINAGE & MAINTENANCE EASEMENT
D/W = DRIVEWAY
EB = ELECTRIC BOX
ENC. = ENCROACHMENT
EP = EDGE OF PAVEMENT
EW = EDGE OF WATER
FDH = FOUND DRILL HOLE
FFE = FINISHED FLOOR ELEVATION
FIP = FOUND IRON PIPE (NO ID)
FIR = FOUND IRON ROD (NO ID)
FN = FOUND NAIL (NO ID)
FN&D = FOUND NAIL & DISK
FPL = FLORIDA POWER & LIGHT TRANSFORMER PAD
L.E. = LANDSCAPE EASEMENT
L.M.E. = LAKE MAINTENANCE EASEMENT
(M) = MEASURED
MDCR = MIAMI-DADE COUNTY RECORDS
MH = MAN HOLE
ML = MONUMENT LINE
(P) = PLAT
PB = PLAT BOOK
PC = POINT OF CURVATURE
PCP = PERMANENT CONTROL POINT
PE = POOL EQUIPMENT PAD
PG = PAGE
PI = POINT OF INTERSECTION
PL = PLANTER
POB = POINT OF BEGINNING
POC = POINT OF COMMENCEMENT
PRC = POINT OF REVERSE CURVATURE
PRM = PERMANENT REFERENCE MONUMENT
PT = POINT OF TANGENCY
R = RADIUS DISTANCE
(R) = RECORD
R/W = RIGHT-OF-WAY
RES = RESIDENCE
SIP = SIP LB#8023
SND = SET NAIL & DISK LB#8023
STL = SURVEY TIE LINE
SWK = SIDEWALK
(TYP) = TYPICAL
UB = UTILITY BOX
U.E. = UTILITY EASEMENT
W/F = WOOD FENCE

SYMBOLS:

☐ = TELEPHONE RISER
☐ = CABLE TV RISER
☒ = WATER METER
X 0.00 = ELEVATION
(00') = ORIGINAL LOT DISTANCE
Δ = CENTRAL ANGLE
C = CENTER LINE
WV = WATER VALVE
☒ = CURB INLET
☒ = FIRE HYDRANT
☒ = LIGHT POLE
☒ = CATCH BASIN
☒ = UTILITY POLE
☒ = DRAINAGE MANHOLE
☒ = SEWER MANHOLE
☒ = METAL FENCE
☒ = WOOD FENCE
☒ = CHAIN LINK FENCE
☒ = EASEMENT
☒ = BOUNDARY LINE
☒ = OVERHEAD UTILITY LINE
☒ = ORIGINAL LOT LINE
ASPHALT CONCRETE PAVERS/BRICK TILES COVERED AREA

GRAPHIC SCALE



CURVE DETAILS:

C-1

R = 1320'

AL = 186.25'

CL = 186.09'

CB = N 80°31'37" E

Δ = 08°05'02"

C-2

R = 25'

AL = 40.53'

CL = 36.23'

CB = S 48°59'33" E

Δ = 92°52'38"

C-3


R = 1150'

AL = 180'

CL = 179.81'

CB = N 80°58'07" E

Δ = 08°58'02"

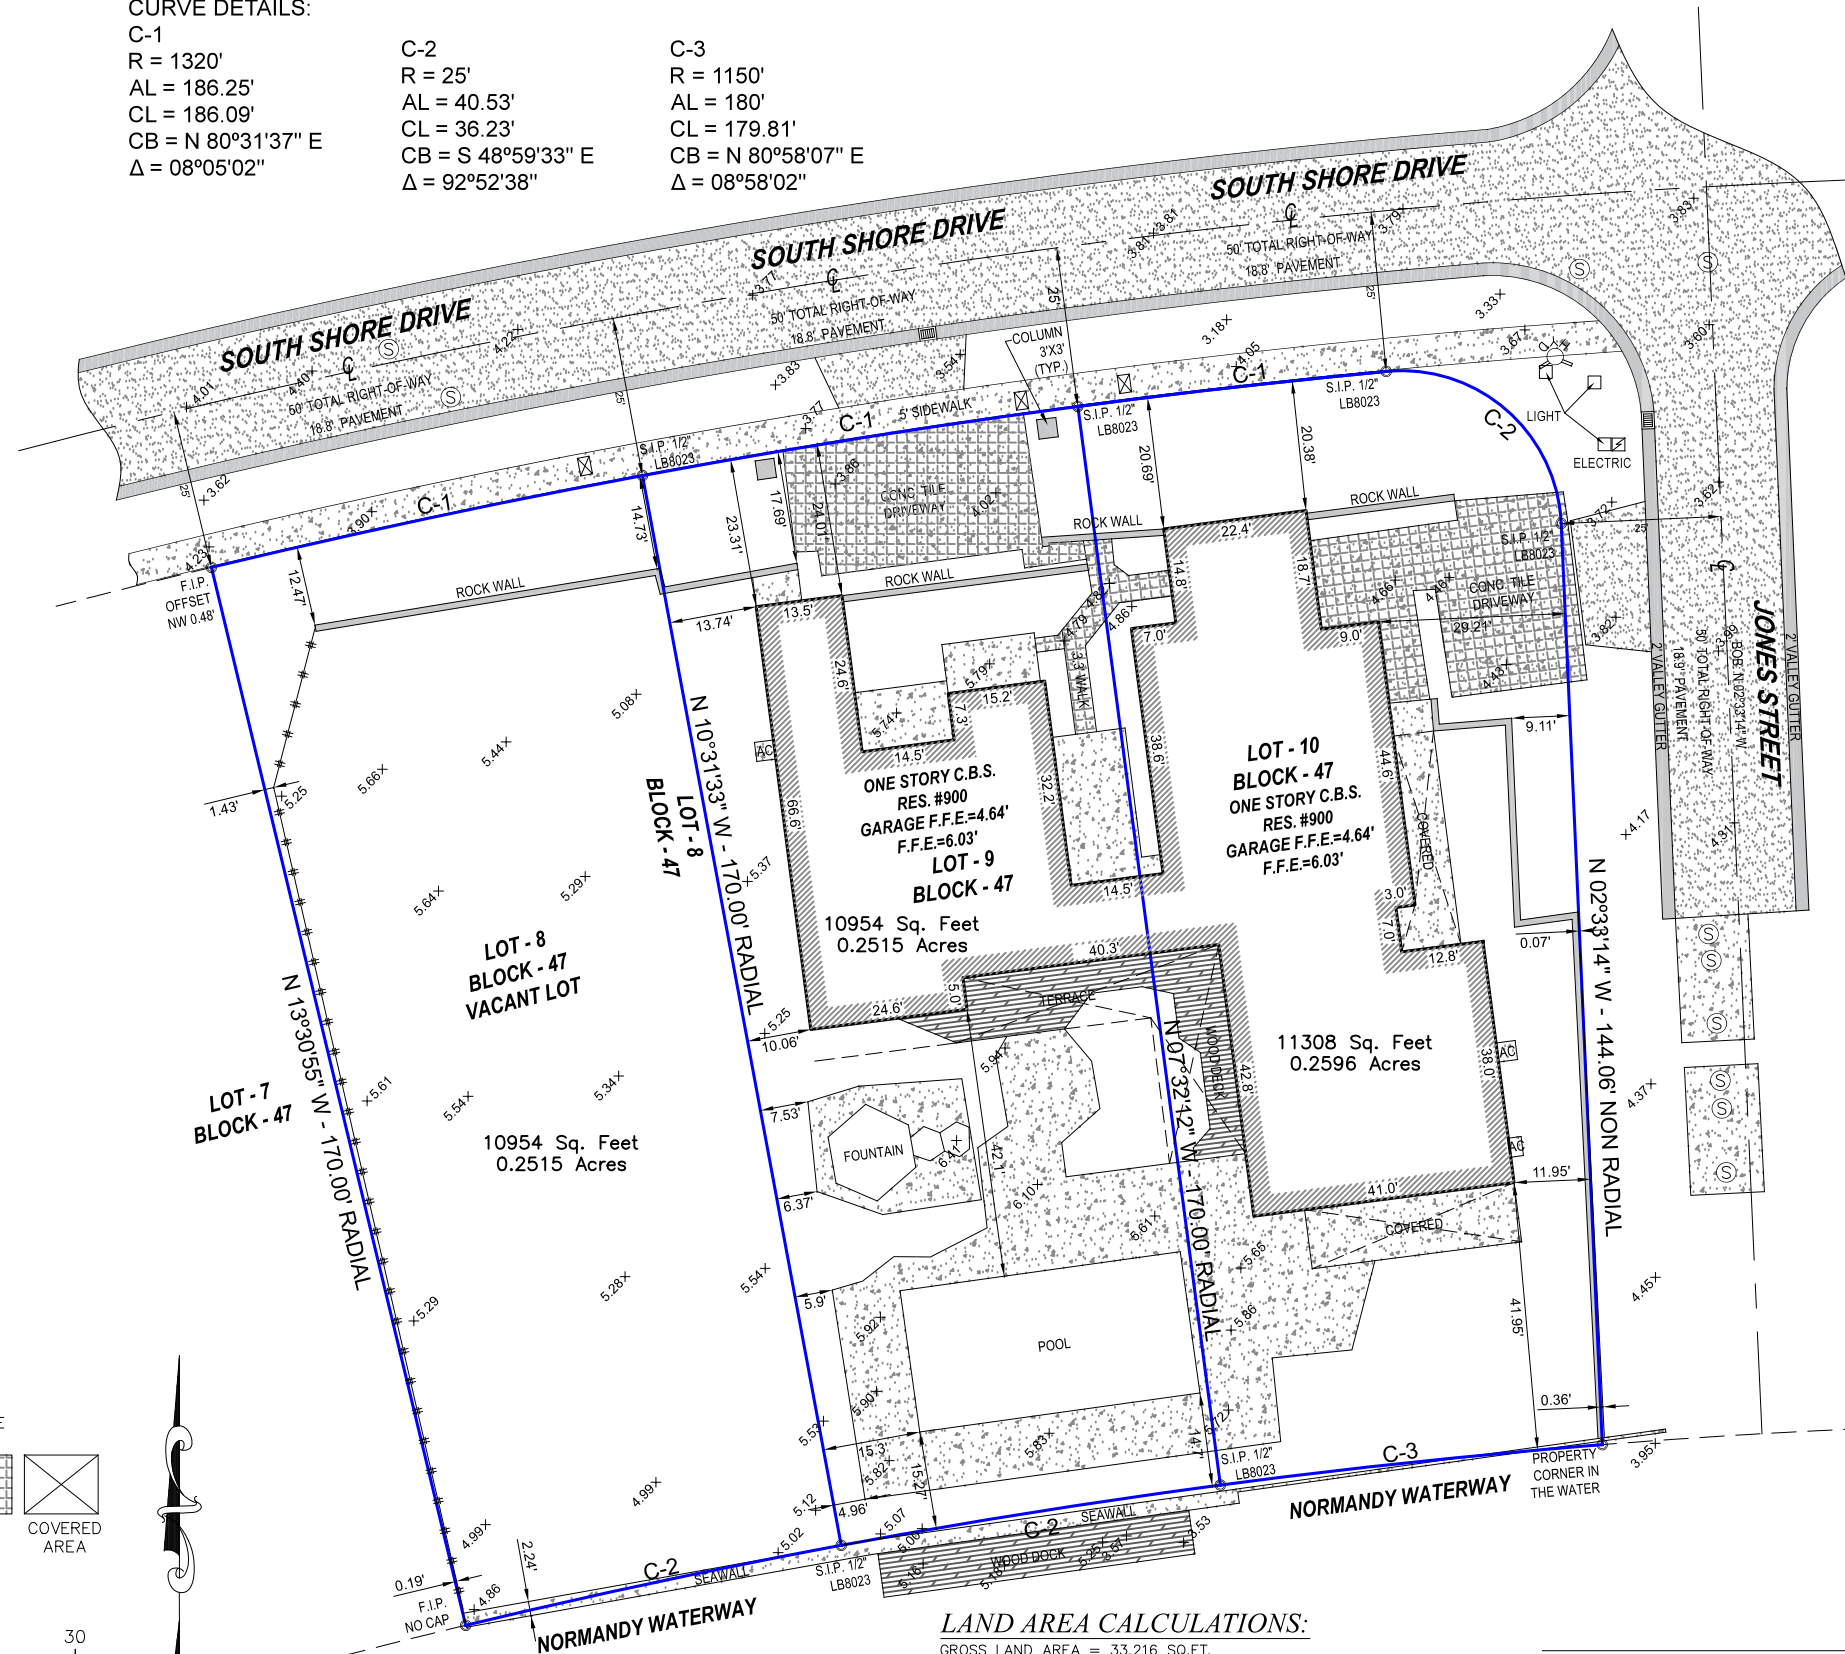

LAND AREA CALCULATIONS:

GROSS LAND AREA = 33,216 SQ.FT.

NICOLAS DEL VENTO
PROFESSIONAL SURVEYOR & MAPPER
STATE OF FLORIDA LIC. # 6945

CERTIFICATE OF AUTHORIZATION # LB-8023

Survey Pros, Inc.

4348 SW 74TH AVENUE, MIAMI, FL. 33155


PH: (305) 767-6802 (main)

MIAMI-DADE | BROWARD | PALM BEACH | MONROE | HILLSBOROUGH | PINELLAS

www.survey-pros.com

LOCATION SKETCH:

NOT TO SCALE

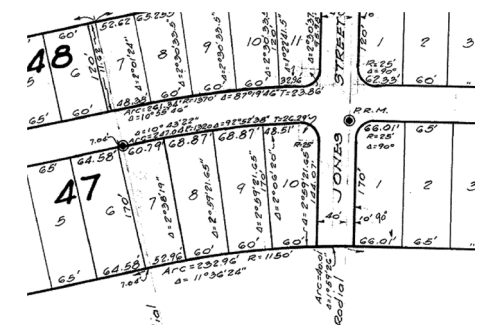

PROPERTY ADDRESS:

900 S SHORE DRIVE, MIAMI BEACH, FL. 33141

LEGAL DESCRIPTION:

LOTS 8, 9 AND 10 IN BLOCK 47 OF NORMANDY GOLF COURSE SUBDIVISION, ACCORDING TO THE PLAT THEREOF AS RECORDED IN PLAT BOOK 44 AT PAGE 62 OF THE PUBLIC RECORDS OF MIAMI-DADE COUNTY, FLORIDA.

FLOOD ZONE INFORMATION:

THE GRAPHICALLY DEPICTED BUILDING(S) SHOWN ON THIS MAP OF SURVEY IS WITHIN ZONE AE BASE FLOOD ELEVATION 8
COMMUNITY NAME & NUMBER CITY OF MIAMI BEACH 120651
MAP & PANEL NUMBER 12086C0307 SUFFIX L

SURVEYOR'S NOTES:

- ELEVATIONS WHEN SHOWN REFER TO 1929 NATIONAL GEODETIC VERTICAL DATUM (NGVD 1929).
- NO ATTEMPT WAS MADE TO LOCATE FOOTINGS/FOUNDATIONS, OR UNDERGROUND UTILITIES UNLESS OTHERWISE NOTED.
- THE LANDS SHOWN HEREON HAVE NOT BEEN ABSTRACTED IN REGARDS TO MATTERS OF INTEREST BY OTHER PARTIES, SUCH AS EASEMENTS, RIGHTS OF WAYS, RESERVATIONS, ETC. ONLY PLATTED EASEMENTS ARE SHOWN.
- THIS SURVEY WAS PREPARED FOR AND CERTIFIED TO THE PARTY(IES) INDICATED HEREON AND IS NOT TRANSFERABLE OR ASSIGNABLE WITHOUT WRITTEN CONSENT OF THIS FIRM.
- ALL BOUNDARY LIMIT INDICATORS SET ARE STAMPED LB#8023.
- THE BOUNDARY LIMITS ESTABLISHED ON THIS SURVEY ARE BASED ON THE LEGAL DESCRIPTION PROVIDED BY THE CLIENT OR ITS REPRESENTATIVE.
- FENCE OWNERSHIP IS NOT DETERMINED. DIMENSIONS ARE TO THE INTERIOR PORTION OF THE FENCE.
- ADDITIONS OR DELETIONS TO THIS SURVEY MAP AND/OR REPORT BY SOMEONE OTHER THAN THE SIGNING PARTY(IES) IS PROHIBITED WITHOUT WRITTEN CONSENT OF THE SIGNING PARTY(IES).
- THIS SURVEY IS NOT VALID WITHOUT THE ORIGINAL SIGNATURE AND RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER. OTHERWISE THIS MAP IS FOR INFORMATIONAL PURPOSES ONLY.
- BEARINGS WHEN SHOWN ARE TO AN ASSUMED MERIDIAN AND BASED ON PLAT. THE CENTERLINE OF JONES STREET BEARS N 02°33'14" W.

SURVEYOR'S CERTIFICATION:

I HEREBY CERTIFY THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AS RECENTLY SURVEYED AND DRAWN UNDER MY DIRECTION AND MEETS THE MINIMUM TECHNICAL STANDARDS SET FORTH BY THE FLORIDA STATE BOARD OF SURVEYORS AND MAPPERS IN CHAPTER 5J-17 FLORIDA ADMINISTRATIVE CODE PURSUANT TO SECTION 472.027 FLORIDA STATUTE.

CERTIFIED TO:

LUIS JOSE MOLLA TRS
LUIS JOSE MOLLA REV TR

SEAL

DATE OF ORIGINAL FIELD WORK:
07/26/2023

JOB NUMBER: 23079749

DRAWN BY: ADRIEL

CAD FILE: MOLLA

SHEET 1 OF 1

REVISION(S):