

SITE RENDERING



LOCATION MAP




SCOPE OF WORK

THE FOLLOWING DRAWINGS ILLUSTRATE THE PROPOSED SCOPE OF WORK FOR 6470 ALLISON ROAD TO BE APPROVED BY MIAMI DADE COUNTY:

- INSTALLATION NEW LANDSCAPE PLANTINGS
- INSTALLATION OF NEW IRRIGATION SYSTEM
- INSTALLATION OF NEW HARDSCAPE
- INSTALLATION OF NEW FRONT ENTRY DRIVEWAY
- INSTALLATION OF NEW LANDSCAPE LIGHTING

THE SALTER GARDEN
 6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (S TYLER NIELSEN - LA6667067)

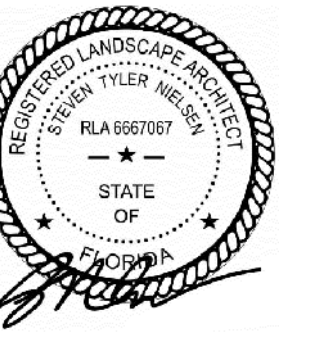

08.07.2024

08.07.2024
 06.17.2024
 05.15.2024
 05.08.2024
 11.30.2023
 09.06.2023
 04.29.2023
 01.29.2023
 11.07.2022
 08.24.2022
 05.13.2022
 04.06.2022
 03.21.2022

SHEET INDEX

LANDSCAPE DRAWINGS	DRAWING NOTES
LCVR	COVER PAGE
L001	GENERAL SITE NOTES
L002	RENDERINGS
L003	RENDERINGS
L004	RENDERINGS
L005	RENDERINGS
L006	RENDERINGS
L007	RENDERINGS
L008	RENDERINGS
L100	TREE DISPOSITION NOTES
L101	TREE DISPOSITION NOTES
L102	TREE REFERENCE IMAGES
L103	TREE DISPOSITION PLAN
L200	DEMOLITION PLAN & NOTES RE: ARCH. DWGS.
L300	GROUND LEVEL MATERIALS PLAN & NOTES
L301	SECOND LEVEL MATERIALS PLAN
L700	PLANTING SCHEDULE & NOTES
L701	PLANT REFERENCE IMAGERY
L702	TREE & PALM PLANTING PLAN
L703	GROUND LEVEL UNDERSTORY PLANTING PLAN
L704	SECOND LEVEL UNDERSTORY PLANTING PLAN
L705	PLANTING DETAILS
L800	IRRIGATION DETAILS & SCHEDULE
L801	GROUND LEVEL IRRIGATION PLAN
L802	SECOND LEVEL IRRIGATION PLAN

COVER PAGE

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

LCVR



SITWORK GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL WORK BY THE SUBCONTRACTORS.
2. CONTRACTOR SHALL VERIFY ALL CONDITIONS AT JOB SITE AND NOTIFY LANDSCAPE ARCHITECT AND GENERAL CONTRACTOR OF DIMENSIONAL ERRORS, OMISSIONS OR DISCREPANCIES BEFORE BEGINNING ANY WORK.
3. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS PRIOR TO CONSTRUCTION. ALL CONTRACTORS MUST COMPLY WITH PERMIT REQUIREMENTS, LOCAL, STATE AND FEDERAL JURISDICTIONS AND GOVERNING BODIES/AGENCIES RULES AND REGULATIONS AND LAND USE APPROVAL CONDITIONS AT ALL TIMES.
4. WORK PERFORMED WITHOUT APPROVAL OF LOCAL, STATE AND FEDERAL JURISDICTIONS AND GOVERNING BODIES/AGENCIES AND/OR NOT IN COMPLIANCE WITH SPECIFICATIONS AND/OR DRAWINGS IS SUBJECT TO REMOVAL AT CONTRACTOR'S EXPENSE.
5. ALL WORK SHALL CONFORM TO THE APPROPRIATE AGENCIES. CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES, LINES AND STRUCTURES PRIOR TO EXCAVATION OR TRENCHING. DAMAGE SHALL BE REPAIRED BY THE CONTRACTOR AT NO COST TO THE OWNER. THE LANDSCAPE ARCHITECT ASSUMES NO RESPONSIBILITY FOR UTILITIES OR STRUCTURES NOT SHOWN ON THE DRAWINGS. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF UTILITIES PRIOR TO CONSTRUCTION AND NOTIFY THE LANDSCAPE ARCHITECT OF ANY DISCREPANCIES. CONTRACTOR SHALL USE EXTREME CAUTION WHEN WORKING OVER OR NEAR EXISTING GAS AND ELECTRICAL LINES.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR RESETTING ALL LAND MONUMENTS DISRUPTED BY CONSTRUCTION ACTIVITIES OR NEGLIGENCE ON THE PART OF THE CONTRACTOR. RESETS SHALL BE PERFORMED UNDER THE SUPERVISION OF A REGISTERED LAND SURVEYOR AND MONUMENT RECORDS MUST BE FILED AS REQUIRED BY STATUTE FOR ALL MONUMENTS.
7. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONARY MEASURES NECESSARY TO PROTECT EXISTING IMPROVEMENTS FROM DAMAGE AND ALL SUCH IMPROVEMENTS AND STRUCTURES DAMAGED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED OR RECONSTRUCTED SATISFACTORY TO THE LANDSCAPE ARCHITECT AT THE CONTRACTOR'S EXPENSE.
8. ALL BARRICADING AND TEMPORARY TRAFFIC CONTROL DEVICES OR METHODS USED DURING CONSTRUCTION SHALL BE IN ACCORDANCE WITH LOCAL, STATE AND FEDERAL JURISDICTIONS AND GOVERNING BODIES/AGENCIES STANDARDS. PROVIDE ADEQUATE TIME FOR REVIEW AND APPROVAL BY THE ABOVE JURISDICTIONS PRIOR TO COMMENCEMENT.
9. THE LANDSCAPE ARCHITECT IS NOT RESPONSIBLE FOR THE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES UTILIZED OR FOR SAFETY PRECAUTIONS OR PROBLEMS IN CONNECTION WITH THE WORK. THE LANDSCAPE ARCHITECT WILL NOT BE RESPONSIBLE FOR THE CONTRACTOR'S FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. CONTRACT DOCUMENTS INCLUDE THE CONSTRUCTION DOCUMENT DRAWING SET/TECHNICAL SPECIFICATIONS MANUAL/LASIS.
10. CONTRACTOR TO VERIFY ALL QUANTITIES. IN CASE OF ANY DISCREPANCIES, GRAPHICALLY SHOWN MATERIAL QUANTITIES SHALL TAKE PRECEDENCE.
11. A SYSTEM OF DIAGRAMMATIC SYMBOLS, HATCHES AND NOTATIONS IS USED IN THESE DRAWINGS. REVIEW NOTATIONS CAREFULLY, NOTIFY LANDSCAPE ARCHITECT AND REQUEST CLARIFICATION OF ANY UNCLEAR NOTATION OR DISCREPANCY PRIOR TO COMMENCING WORK.


SITWORK GENERAL NOTES CONTINUED

1. PROVIDE SLEEVES AS REQUIRED FOR DRAINAGE, IRRIGATION AND ELECTRICAL LINES. IRRIGATION AND ELECTRICAL SLEEVES AND SUBSURFACE DRAINAGE SYSTEMS SHALL BE CONSTRUCTED PRIOR TO PAVING AND LANDSCAPE WORK. UTILITY SLEEVES ARE REQUIRED IN ALL PLANT BEDS ISOLATED BY PAVEMENT OR ANY OTHER STRUCTURES.
2. SPECIAL CONSIDERATION IS GIVEN TO THE DESIGN AND INTENDED RELATIONSHIP BETWEEN ARCHITECTURE, PLANTING AREAS AND PAVING SYSTEMS. PAVEMENT JOINTING, PAVERS, STONE, FINISHES AND GRADES HAVE BEEN STRICTLY COORDINATED IN THE CONTRACT DOCUMENTS. CONSTRUCTION OF THESE SYSTEMS SHALL BE STRICTLY COORDINATED.
3. VEHICLES, EQUIPMENT, AND/OR MATERIALS SHALL NOT BE PARKED OR STORED IN AREAS OF EXISTING VEGETATION, INCLUDING WITHIN THE DRIPLINE OF EXISTING TREES TO REMAIN.
4. CONSTRUCTION WASTE-INCLUDING BUT NOT LIMITED TO: PLANT MATERIAL, BUILDING MATERIALS, DEMOLISHED MATERIALS, PACKAGING, LEFTOVER PAINT AND CONCRETE SLURRY-SHOULD BE PROPERLY REUSED, RECYCLED, DISPOSED OF LEGALLY OFF-SITE OR IN DESIGNATED WASH-OUT AREAS DETERMINED BY THE GENERAL CONTRACTOR.
5. RECYCLING AND TRASH BINS TO BE PROVIDED ON SITE. SEPARATE BINS FOR CARDBOARD, CO-MINGLED, AND OTHER RECYCLABLE/REUSABLE MATERIALS IDENTIFIED BY THE LOCAL JURISDICTION SHALL BE MAINTAINED. ALL BINS TO BE WILDLIFE-PROOF.
6. ON-SITE FUEL STORAGE FOR CONSTRUCTION EQUIPMENT IS DISCOURAGED. CONSTRUCTION EQUIPMENT USED ON SITE TO BE CHECKED REGULARLY TO ASSURE CONTAMINATION CONCERNS FROM OILS AND GREASES ARE ELIMINATED. NO TOXIC MATERIALS SHALL BE STORED ON-SITE.
7. GENERAL CONTRACTOR TO KEEP ALL ITEMS IMPLEMENTED BY LANDSCAPE ARCHITECT IN PROPER WORKING ORDER THROUGHOUT THE DURATION OF THE PROJECT.
8. THE CONSTRUCTION SITE TO BE INSPECTED ON A MONTHLY BASIS BY LANDSCAPE ARCHITECT AND/OR CIVIL ENGINEER TO ASSURE THAT THE SILT FENCE AND MUD TRACKING PAD ARE PROPERLY IN PLACE AND FUNCTIONING AS DESIGNED.
9. GREEN BUILDING PRACTICES SHALL BE EMPLOYED TO THE EXTENT FEASIBLE. SUCH PRACTICES INCLUDE: CARPOOLING/VANPOOLING TO JOB SITE, MINIMIZING MATERIALS PACKING BEFORE ARRIVAL TO JOB SITE, REDUCING MATERIAL/RESOURCE INEFFICIENCIES BY COORDINATING WORK.
10. THE PROJECT LIMIT OF CONSTRUCTION AND ALL EXISTING VEGETATION TO REMAIN IS TO BE CLEARLY DEFINED BY STURDY, WEATHERPROOF FENCING AT A MINIMUM OF FOUR (4) FEET HIGH.
11. WATERPROOFING OF SUBGRADE AND OTHER ARCHITECTURAL SPACES BELOW AND/OR ADJACENT TO IMPROVEMENTS DESIGNED BY THE LANDSCAPE ARCHITECT IS TO BE ADEQUATELY DESIGNED AND DETAILED BY OTHERS TO PERMANENTLY REPEL ALL WATER SOURCES INCLUDING, BUT NOT LIMITED TO: PRECIPITATION, STORM WATER RUNOFF, GROUND WATER, IRRIGATION, ROOF RUNOFF, GROUND WATER, AND PLUMBING LEAKS.
12. STRUCTURAL DESIGN TO SUPPORT IMPROVEMENTS DESIGNED BY THE LANDSCAPE ARCHITECT AND LOCATED ABOVE, BELOW, AND/OR ADJACENT TO SUBGRADE AND OTHER ARCHITECTURAL SPACES IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER. THE STRUCTURAL DESIGN SHOULD BE ADEQUATELY DESIGNED TO SUPPORT ALL POSSIBLE LOADS INCLUDING, BUT NOT LIMITED TO: BACKFILL, COMPACTION, PLANTINGS, HARDSCAPES, RETAINING AND FREESTANDING SITE WALLS, AND CONSTRUCTION MATERIALS/EQUIPMENT/ACTIVITY.

SOIL EROSION CONTROL NOTES

1. PRIOR TO BEGINNING ANY EARTH CHANGE, THE CONTRACTOR SHALL INSTALL AND MAINTAIN ALL SESC MEASURES AS SHOWN ON THE CONTRACT DOCUMENTS AND AS REQUIRED BY ANY GOVERNING AGENCIES.
2. ALL SESC MEASURES TO BE MAINTAINED DAILY.
3. THE CONTRACTOR TO CONDUCT ALL EXCAVATION, FILLING, GRADING, AND CLEANUP OPERATIONS IN A MANNER SUCH THAT SEDIMENT, GENERATED BY WIND OR WATER IS NOT DISCHARGED INTO ANY STORM SEWER, DRAINAGE DITCH, RIVER, LAKE, AIR, OR UNDERGROUND UTILITY SYSTEM. STAGE WORK TO MINIMIZE THE AREA OF EXPOSED SOIL, THEREBY REDUCING THE OPPORTUNITY FOR SOIL EROSION.
4. WATER FROM TRENCHES AND OTHER EXCAVATION TO BE PUMPED INTO A FILTRATION BAG TO REMOVE SEDIMENTS FROM THE WATER.
5. NORTH AMERICAN GREEN SC-150 OR EQUIVALENT EROSION CONTROL FABRIC IS REQUIRED ON ALL DISTURBED SLOPES GREATER THAN 3:1 UNTIL PROJECT AREA IS REVEGETATED PER THE PLANTING PLAN.
6. PROVIDE POSITIVE DRAINAGE AWAY FROM ALL STRUCTURES.
7. CONTRACTOR TO PROVIDE ONSITE WATERING TO REDUCE FUGITIVE DUST LEAVING THE SITE DURING CONSTRUCTION.
8. SOIL EROSION CONTROL MEASURES TO BE PROVIDED FOR ALL EXISTING AND PROPOSED DRAINAGE STRUCTURES WITHIN THE PROJECT LIMITS.
9. CONSTRUCTION STAGING AND PHASING SHALL OCCUR, WHERE APPLICABLE, TO MINIMIZE SOIL DISTURBANCE TIME.
10. BEST MANAGEMENT PRACTICES (BMPs) SHALL BE ADJUSTED AS NEEDED TO MEET ANY OTHER UNFORESEEN CONDITIONS.
11. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR INSTALLING A MUD TRACKING PAD/WASHING PAD AT THE CONSTRUCTION ENTRANCES TO MINIMIZE MUD DETACHMENT FROM TRUCK TIRES. 1-1/2 INCH SCREENED ROCK TO BE PLACED ON MIRAFI 140-N FILTER FABRIC. ADDITIONAL CLEAN GRAVEL TO BE ADDED THROUGHOUT THE DURATION OF CONSTRUCTION AS NEEDED.
12. CONTRACTOR SHALL ABIDE BY THE LOCAL, STATE AND FEDERAL JURISDICTIONS AND GOVERNING BODIES/AGENCIES CONSTRUCTION MANAGEMENT PLAN REQUIREMENTS.
13. RESEED AS INDICATED IN SEEDING NOTES.

SEAL (S TYLER NIELSEN - LA6667067)

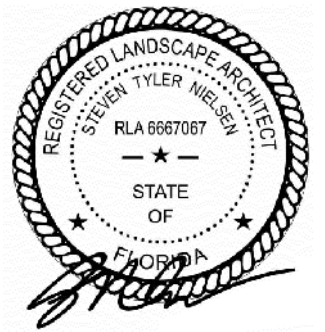

08.07.2024

GENERAL SITE NOTES

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L001



THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (S TYLER NIELSEN - LA6667067)



08.07.2024

RENDERINGS


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L002



THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141


SEAL (S TYLER NIELSEN - LA6667067)

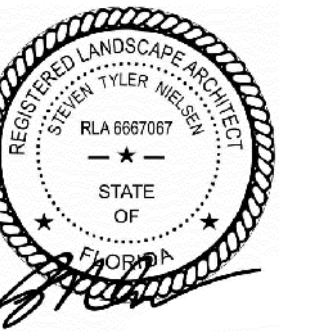

08.07.2024


RENDERINGS

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

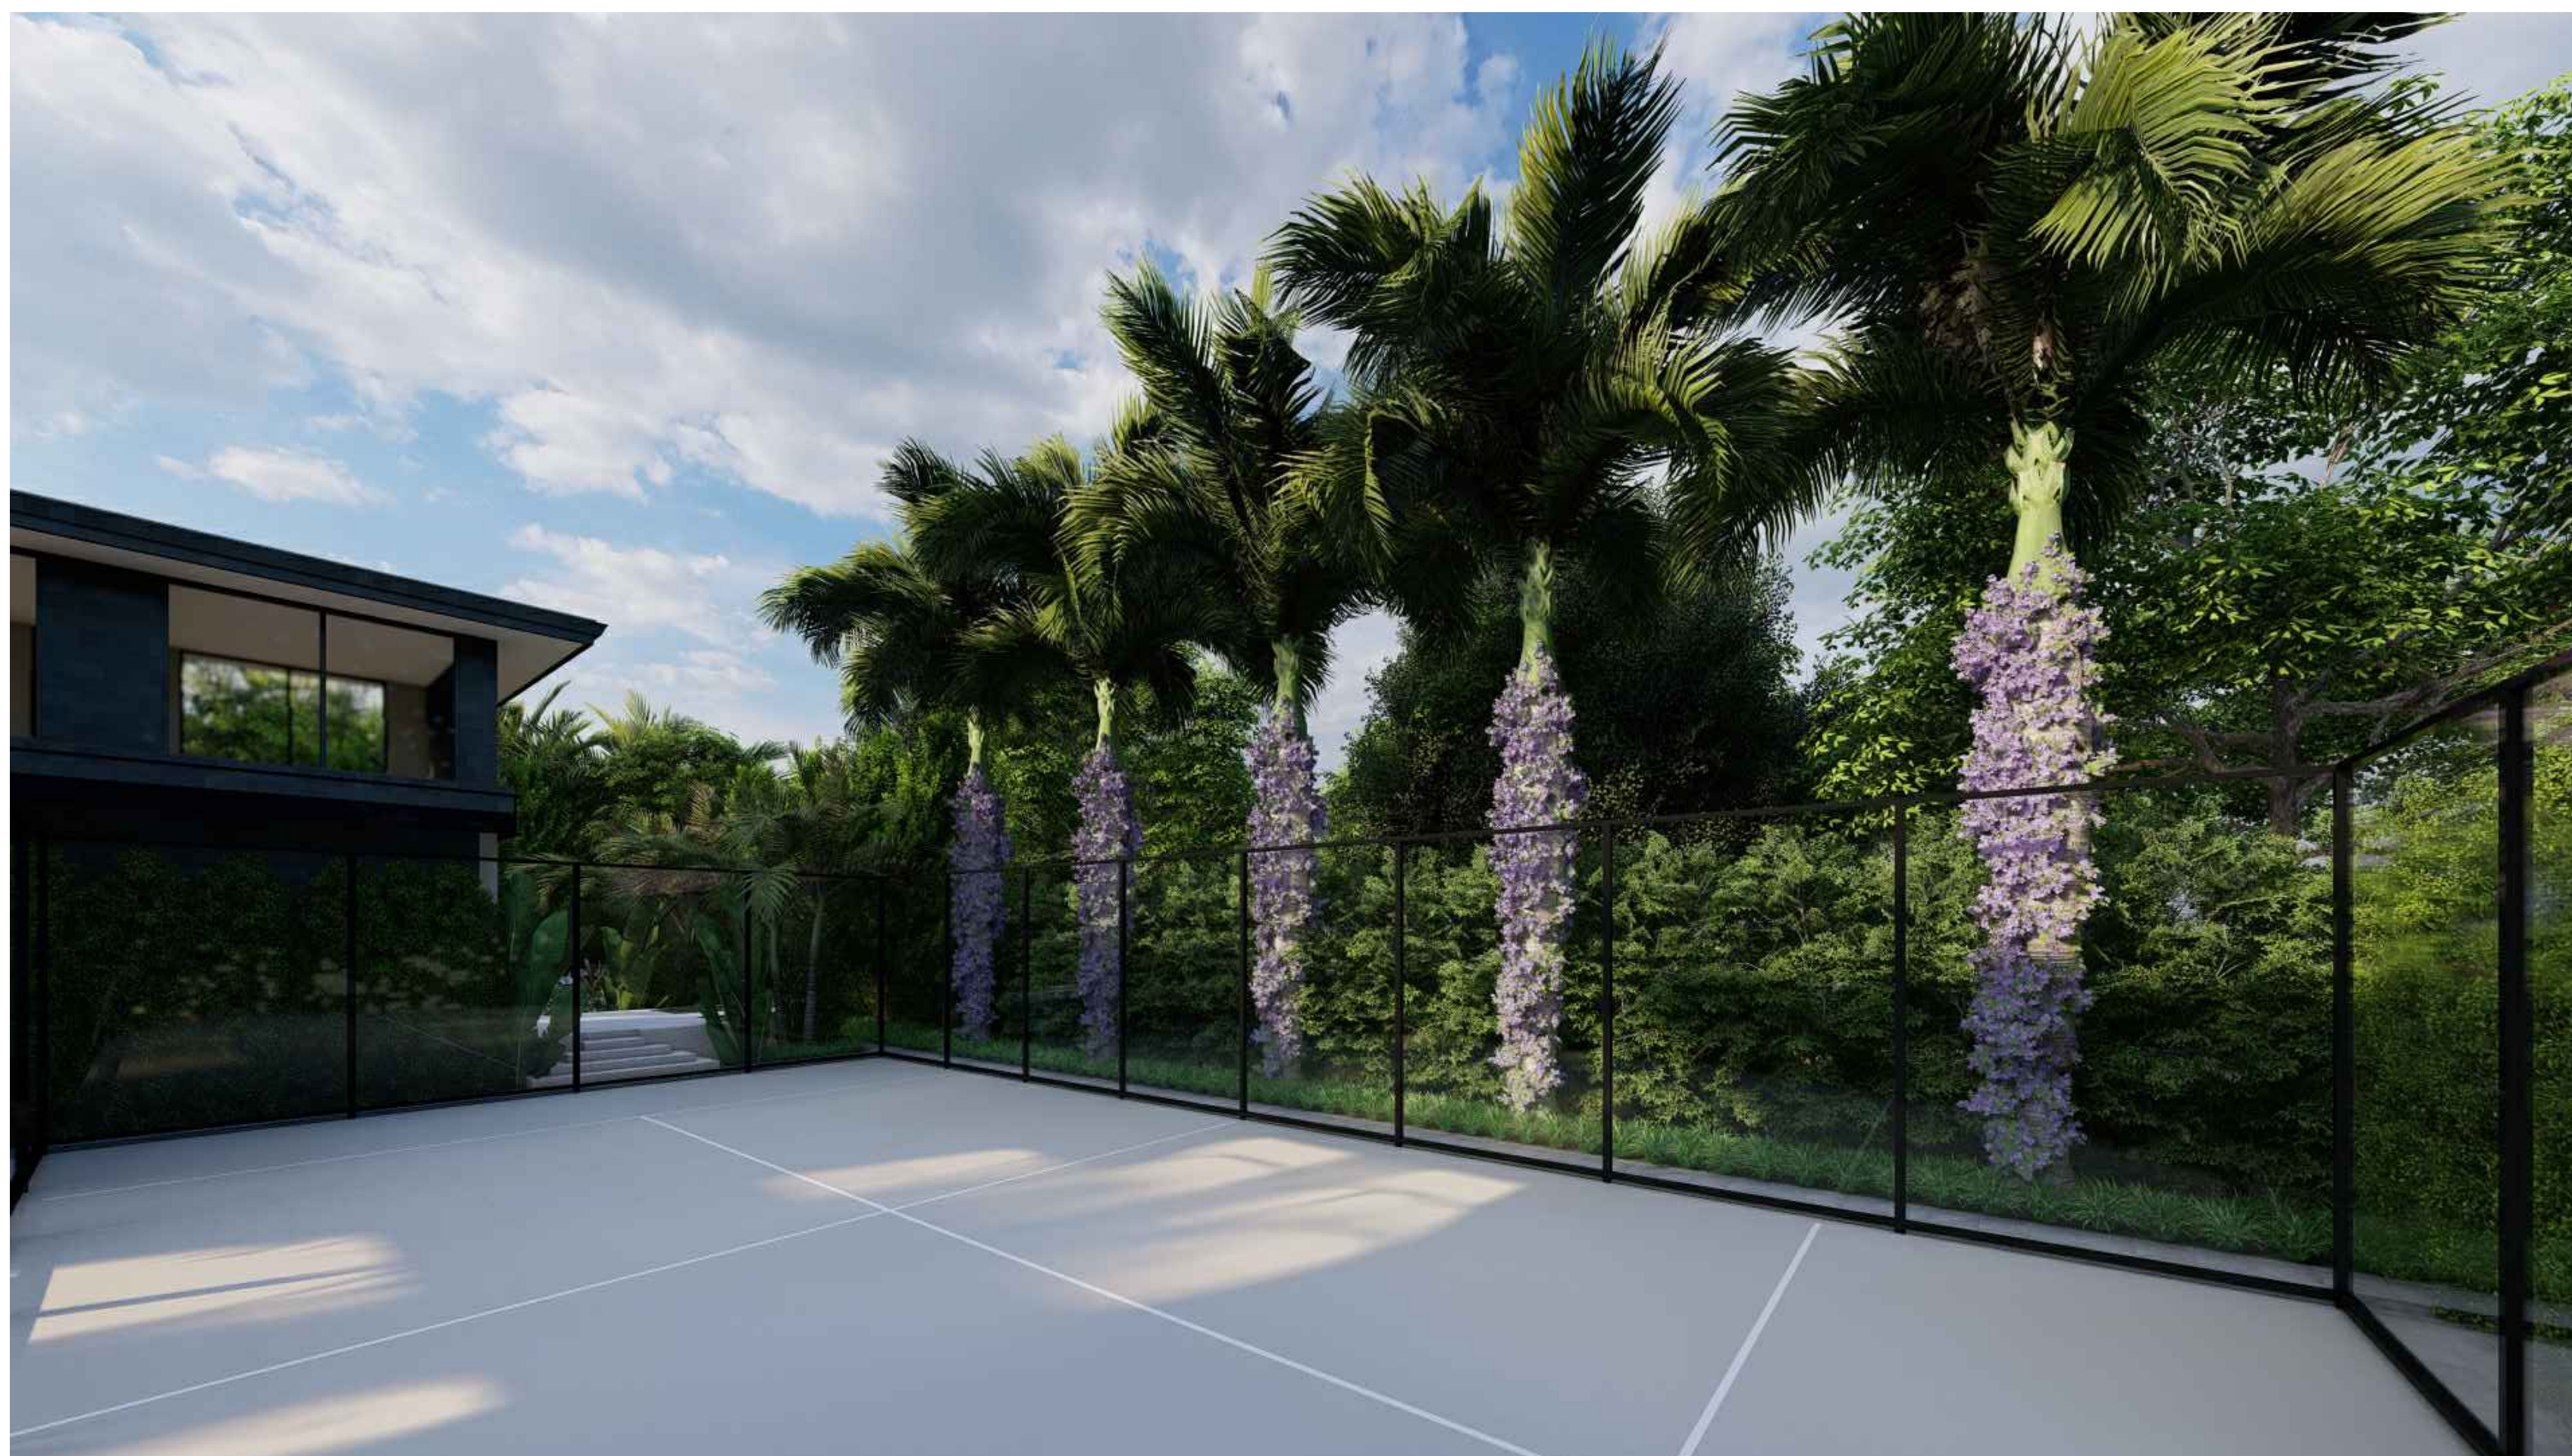

THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (S TYLER NIELSEN - LA6667067)

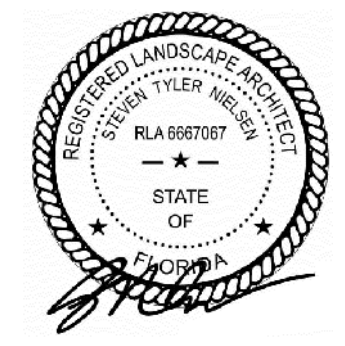

08.07.2024

RENDERINGS


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L004



6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141
THE SALTER GARDEN

SEAL (S TYLER NIELSEN - LA6667067)

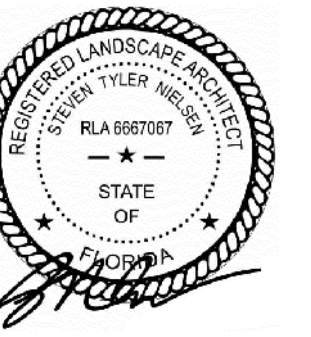

08.07.2024

RENDERINGS


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L005



THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (S TYLER NIELSEN - LA6667067)

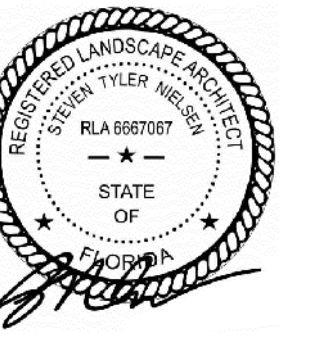

08.07.2024

RENDERINGS


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L006



THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (S TYLER NIELSEN - LA6667067)

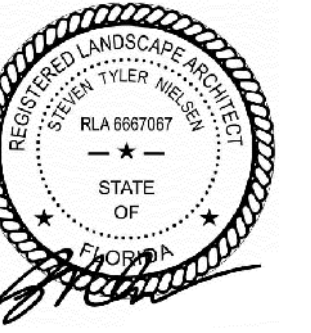

08.07.2024

RENDERINGS

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L007



THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141


SEAL (S TYLER NIELSEN - LA6667067)



08.07.2024

RENDERINGS

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

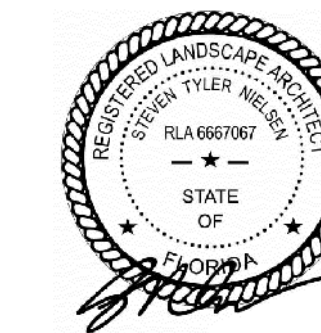

08.07.2024

TREE DISPOSITION NOTES

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L100

PALM ROOT PRUNING SPECIFICATIONS

1. THE FOLLOWING TABLE LISTS MINIMUM ROOTBALL DIAMETERS FOR VARIOUS SPECIES OF PALMS BASED ON REAL-WORLD EXPERIENCE OF RELOCATION SPECIALISTS IN SOUTH FLORIDA.

PALM SPECIES	ROOTBALL SPECIFICATIONS
SABAL/CABBAGE PALM	36" diameter
QUEEN & FOXTAIL PALMS	12" from trunk in all directions
ROYAL & COCONUT PALMS	18-24" from trunk in all directions
CANARY DATE PALM	24" from trunk in all directions
SLOW-GROWING PALMS	24" from trunk in all directions

2. PALM ROOTBALL MUST BE A MINIMUM OF 24" DEEP, WHENEVER POSSIBLE, ROOTBALLS MUST BE CIRCULAR IN SHAPE WITH AN EQUAL DISTANCE FROM THE TRUNK TO THE EDGE OF THE ROOTBALL ALL AROUND.

3. AS A GENERAL RULE, MINIMUM ROOT PRUNE TIME FOR PALMS IS 6-8 WEEKS. THE FIRST ROOT PRUNE MUST BE ON TWO OPPOSING SIDES OF THE ROOTBALL, WITH THE SECOND ROOT PRUNE ON ONE OF THE OTHER TWO SIDES DONE A MINIMUM OF 3-4 WEEKS LATER, AND A THIRD ROOT PRUNE ON THE LAST SIDE DONE A MINIMUM OF 4.5-6 WEEKS AFTER THAT. THE SECOND AND THIRD ROOT PRUNES MAY ONLY BE DONE WHEN HEALTHY NEW ROOT GROWTH FROM EARLIER ROOT PRUNES IS EVIDENT (SEE SECTION 2.14 ABOVE FOR SPECIFICATIONS ON PHOTOGRAPHICALLY DOCUMENTING NEW ROOT GROWTH DURING THE ROOT PRUNE PROCESS). MORE TIME MAY BE NEEDED DURING THE COOLER MONTHS OF THE YEAR.

4. CERTAIN PALMS, IN PARTICULAR THOSE THAT ARE SLOW GROWING, REQUIRE LONGER ROOT PRUNING TIME. THESE INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING.

- ALL SPECIES OF ARCHONTOPHOENIX
- ALL SPECIES OF CORYPHA
- AMERICAN OIL PALMS (ALL SPECIES OF ATTALEA)
- BISMARCK PALM (BISMARCKIA NOBILIS)
- CUBAN & CARIBBEAN COPERNICIA
- CUBAN BELLY PALM (GASTROCOCOS CRISPA)
- GINGERBREAD/DOUM PALMS (ALL SPECIES OF HYPHAENE)
- PALMYRA PALMS (ALL SPECIES OF BORASSUS)
- SATAKE PALM (SATAKENTIA LIUKIJENSIS)
- SAW PALMETTO (SERENOA REPENS)
- SILVER PALM (COCOTHIRINAX ARGENTATA)
- ZOMBIE PALM (ZOMBIA ANTILLARUM)

FOR THESE PALMS, THE MINIMUM ROOT PRUNING TIME IS 4-6 MONTHS OR GREATER. ONLY WHEN SUFFICIENT NEW ROOT GROWTH HAS TAKEN PLACE FOLLOWING AN EARLIER ROOT PRUNE CAN THE NEXT ROOT PRUNE BE DONE, AND ONLY WHEN SUFFICIENT NEW ROOT GROWTH HAS TAKEN PLACE FOLLOWING THE FINAL ROOT PRUNE MAY THE TREE BE RELOCATED (SEE SECTION 2.14 ABOVE FOR SPECIFICATIONS ON PHOTOGRAPHICALLY DOCUMENTING NEW ROOT GROWTH DURING THE ROOT PRUNE PROCESS).

TREE CANOPY PRUNING SPECIFICATIONS

1. PRIOR TO RELOCATION, THE CANOPY OF EACH TREE TO BE RELOCATED MUST BE SELECTIVELY PRUNED TO REMOVE CROSSING DEAD, DISEASED, BROKEN, AND LOW HANGING BRANCHES THAT MAY INTERFERE WITH CONSTRUCTION ACTIVITIES, OR THAT MAY INTERFERE OR RESTRICT STRAPPING OR LIFTING THE TREE DURING RELOCATION.

2. FOR TREES BEING RELOCATED ONSITE, THE CANOPY MAY BE SELECTIVELY THINNED AND REDUCED BY NO MORE THAN 1/3 OF THE OVERALL CANOPY MASS, AT THE DIRECTION OF THE LANDSCAPE ARCHITECT; HOWEVER, THE BASIC SHAPE, FORM, AND CHARACTER OF THE TREES MUST BE PRESERVED.

3. FOR TREES BEING RELOCATED OFFSITE, THE CANOPY MUST BE PRUNED, AT THE DIRECTIONS OF THE LANDSCAPE ARCHITECT, TO FIT ON THE TRAILER FOR TRANSPORT. EVERY EFFORT MUST BE MADE TO RETAIN AS MANY BRANCHES AS POSSIBLE. TO THE WIDEST LOAD WIDTH ALLOWABLE BY THE FLORIDA DEPARTMENT OF TRANSPORTATION. CONTRACTOR MUST OBTAIN ALL NECESSARY PERMITS AND ESCORTS TO TRANSPORT WIDE LOADS, PER FLORIDA LAW.

4. ALL CANOPY PRUNING MUST BE CONDUCTED FOLLOWING ANSI A-300 TREE PRUNING STANDARDS AND BEST MANAGEMENT PRACTICES.

5. ALL DEBRIS GENERATED DURING CANOPY PRUNING MUST BE REMOVED OFFSITE AND DISPOSED.

PALM CANOPY PRUNING SPECIFICATIONS

1. IT IS WELL KNOWN THAT SOME PALMS SURVIVE RELOCATION BETTER WHEN ALL OF THE LEAVES ARE REMOVED (E.G., CABBAGE PALM, SABAL PALMETTO), AND THAT OTHER PALMS BENEFIT FROM HAVING THEIR LEAVES CUT IN HALF DURING RELOCATION (E.G., COCONUT PALM, COCOS NUCIFERA). BOTH OF THESE HORTICULTURAL PRACTICES, WHILE TRUE, ARE ONLY APPLICABLE WHEN PALMS ARE NOT ROOT PRUNED. LEAVES DO NOT NEED TO BE CUT IN HALF OR REMOVED FROM PALMS THAT ARE ADEQUATELY ROOT PRUNED. ON OCCASION WHEN SUFFICIENT ROOT PRUNING TIME IS NOT AVAILABLE, PALMS TO BE RELOCATED MAY HAVE THEIR LEAVES CUT IN HALF OR REMOVED ENTIRELY AT THE DIRECTION OF THE LANDSCAPE ARCHITECT.

2. PALMS LEAVES MUST BE TIED UP WITH 2-PLY BIODEGRADABLE TWINE PRIOR TO RELOCATION TO PREVENT MECHANICAL DAMAGE DURING THE RELOCATION PROCESS.

3. PALM TRUNKS SHALL ONLY BE 'CLEANED UP' ACCORDING TO THE LANDSCAPE ARCHITECT'S SPECIFICATIONS SPECIFIC TO EACH PALM.

TREE ROOT PRUNING SPECIFICATIONS

1. ALL TREES AND PALMS TO BE RELOCATED MUST BE WATERED DAILY FOR AT LEAST 2-3 DAYS PRIOR TO ANY ROOTS BEING CUT TO ENSURE THAT THEY ARE FULLY HYDRATED. EACH WATERING MUST THOROUGHLY SATURATE THE ROOTBALL TO ITS FULL DEPTH.

2. EACH TREE AND PALMS MUST THEN BE WATERED EVERY OTHER DAY, NOT RELYING ON RAIN, DURING THE ENTIRE ROOT PRUNING PROCESS EITHER BY A TEMPORARY IRRIGATION SYSTEM OR BY HAND. EACH WATERING MUST THOROUGHLY SATURATE THE ROOTBALL TO ITS FULL DEPTH.

3. TREE AND PALM RELOCATION ACTIVITIES MUST BE SCHEDULED SO THAT REMOVAL AND REPLANTING TAKE PLACE IN THE SAME 24-HOUR PERIOD. NO TREES OR PALMS MAY BE "STOCKPILED" ONSITE OR OFFSITE FOR ANY PERIOD OF TIME WITHOUT PRIOR WRITTEN APPROVAL OF THE LANDSCAPE ARCHITECT. WHEN ALLOWED, APPROVAL FOR THE METHOD OF "STOCKPILING" MUST BE OBTAINED FROM THE LANDSCAPE ARCHITECT.

4. ALL DIGGING IN THE ROOT ZONE DURING THE ROOT PRUNE PROCESS MUST BE DONE BY HAND; NO MACHINERY WILL BE ALLOWED. PRUNING OF ROOTS MUST BE DONE BY HAND WITH CLEAN, SHARP TOOLS. DO NOT PAINT CUT ROOTS WITH TREE PAINT OR ANY KIND OF SEALANT.

5. MYCORRHIZA (ROOTS® TRANSPLANT OR EQUIVALENT) MUST BE INCORPORATED INTO THE BACKFILL SOIL PRIOR TO BACKFILLING AS PER MANUFACTURER'S RECOMMENDATIONS.

6. AFTER EACH ROOT PRUNE, EACH SECTION OF ROOTBALL THAT IS PRUNED MUST BE WRAPPED WITH BLACK PLASTIC AND THE TRENCH BACKFILLED WITH ORIGINAL EXCAVATED SOIL. A TREE RING WITH A MINIMUM HEIGHT OF 6" MUST BE CONSTRUCTED 6-12" OUTSIDE THE OUTERMOST EDGE OF THE ROOTBALL AND AROUND THE ENTIRE PERIMETER OF THE ROOTBALL TO DIRECT IRRIGATION WATER AND ANY ADDED SUPPLEMENTS DOWN INTO THE ROOTBALL DURING ROOT REGENERATION.

7. ONCE THE TREE RING IS CONSTRUCTED AFTER EACH ROOT PRUNE, A HIGH-PHOSPHORUS ROOT STIMULANT MUST BE LIBERALLY APPLIED TO THE SURFACE OF THE ROOTBALL AND THOROUGHLY WATERED IN TO ENCOURAGE NEW ROOT GROWTH.

8. PRIOR TO ANY ROOTS BEING CUT, ALL MAJOR ROOTS MUST BE IDENTIFIED TO DETERMINE THE ROOTBALL DIAMETER BASED ON THE RELATIVE LOCATION AND SIZE OF THE ROOTS.

9. MANY TREE RELOCATION SPECIFICATIONS USE "GENERAL RULES" TO CALCULATE MINIMUM ROOTBALL DIAMETER, SUCH AS MULTIPLYING THE DIAMETER AT BREAST HEIGHT (DBH) OF THE TREE BY A FACTOR OF 10 OR ALLOWING A MINIMUM OF 9"-12" OF ROOTBALL FOR EVERY 1" OF TREE CALIPER. OTHERS LIST UNREALISTIC MINIMUM SIZES FOR THE ROOTBALLS OF VARIOUS TREE CALIPERS OR OTHERS LIST UNREALISTIC MINIMUM SIZES FOR THE ROOTBALLS OF VARIOUS TREE CALIPERS OR HEIGHTS. IN MANY CASES, SUCH APPROACHES RESULT IN ROOTBALLS THAT ARE EITHER TOO LARGE OR TOO SMALL FOR A GIVEN TREE. THE FOLLOWING TABLE LIST MINIMUM ROOTBALL DIAMETERS BASED ON REAL-WORLD EXPERIENCE OF TREE RELOCATION SPECIALISTS IN SOUTH FLORIDA.

.CALIPER (inches)	MIN. ROOTBALL DIA. (feet)	CALIPER (inches)	MIN. ROOTBALL DIA. (feet)
1-4	3	12-14	8
4-5	4	15-17	10
6-7	5	18-24	12-15
8-9	6	25-30	15-25
10-11	7	30+	as needed

1. WHENEVER POSSIBLE, ROOTBALLS MUST BE CIRCULAR IN SHAPE WITH AN EQUAL DISTANCE FROM THE TRUNK TO THE EDGE OF ROOTBALL ALL AROUND.

2. MINIMUM ROOTBALL DEPTH MUST BE 24"-36" FOR ALL TREES TO BE RELOCATED, WITH THE ACTUAL DEPTH TO BE DETERMINED ONLY AFTER A THOROUGH EXAMINATION OF ALL ROOTS DURING THE INITIAL ROOT INSPECTION AND BASED ON THE ABSENCE OF MAJOR ROOTS AT THE BOTTOM OF THE ROOTBALL. ROOTBALLS DEEPER THAN 36" MAY BE REQUIRED FOR LARGE SPECIMEN TREES, DEPENDING ON THE RELATIVE LOCATIONS AND DEPTHS OF THE MAJOR ROOTS AS OBSERVED DURING THE INITIAL ROOT INSPECTION.

3. AS A GENERAL RULE, MINIMUM ROOT PRUNE TIME FOR TREES WITH A DBH OF LESS THAN 10" IS 12 WEEKS. THE FIRST ROOT PRUNE MUST BE ON TWO OPPOSING SIDES OF THE ROOTBALL, WITH THE SECOND ROOT PRUNE ON ONE OF THE OTHER TWO SIDES DONE A MINIMUM OF 6 WEEKS LATER, AND A THIRD ROOT PRUNE ON THE LAST SIDE DONE A MINIMUM OF 3 WEEKS AFTER THAT. THE SECOND AND THIRD ROOT PRUNES MAY ONLY BE DONE WHEN HEALTHY NEW ROOT GROWTH FROM EARLIER ROOT PRUNES IS EVIDENT (SEE SECTION 2.14 ABOVE FOR SPECIFICATIONS ON PHOTOGRAPHICALLY DOCUMENTING NEW ROOT GROWTH DURING THE ROOT PRUNE PROCESS). MORE TIME MAY BE NEEDED DURING THE COOLER MONTHS OF THE YEAR.

4. AS A GENERAL RULE, MINIMUM ROOT PRUNE TIME FOR TREES WITH A DBH OF 10" OR GREATER IS 24 WEEKS. THE FIRST ROOT PRUNE MUST BE ON TWO OPPOSING SIDES OF THE ROOTBALL, WITH THE SECOND ROOT PRUNE ON ONE OF THE OTHER TWO SIDES DONE A MINIMUM OF 12 WEEKS LATER, AND A THIRD ROOT PRUNE ON THE LAST SIDE DONE A MINIMUM OF 6 WEEKS AFTER THAT. THE SECOND AND THIRD ROOT PRUNES MAY ONLY BE DONE WHEN HEALTHY NEW ROOT GROWTH FROM EARLIER ROOT PRUNES IS EVIDENT (SEE SECTION 2.14 ABOVE FOR SPECIFICATIONS ON PHOTOGRAPHICALLY DOCUMENTING NEW ROOT GROWTH DURING THE ROOT PRUNE PROCESS). MORE TIME MAY BE NEEDED DURING THE COOLER MONTHS OF THE YEAR.

5. CERTAIN HARDWOOD TREES AND GYMNOSPERMS REQUIRE LONGER ROOT PRUNING TIMES. THESE INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING:

- AVOCADO (PERSEA AMERICANA)
- BLACK OLIVE (BUCIDA BUCERAS)
- BRIDALVEIL (CAESALPINIA GRANADILLO)
- CASSIAS (ALL SPECIES OF CASSIA)
- LIGNUM VITAE (GUJA/ACUM SANCTUM & G. OFFICINALE)
- PODOCARPUS (PODOCARPUS SP.)
- LIVE OAK (QUERCUS VIRGINIANA)
- MAHOGANY (SWIETENIA MAHAGONI)
- MANGO (MANGIFERA INDICA)

CONTRACTOR QUALIFICATIONS

1. CONTRACTOR MUST BE A LICENSED LANDSCAPE CONTRACTOR.
2. CONTRACTOR MUST HAVE A MINIMUM OF 10 YEARS OF PROVEN EXPERIENCE RELOCATING LARGE SPECIMEN TREES AND PALMS IN SOUTH FLORIDA.
3. CONTRACTOR MUST HAVE PROVEN EXPERIENCE RELOCATING TREES AND PALMS OF THE SAME SPECIES AND SIZE AS THOSE TO BE RELOCATED FOR THE CURRENT PROJECT.
4. CONTRACTOR MUST HAVE A CERTIFIED ARBORIST ON STAFF

CONTRACTOR REQUIREMENTS

1. CONTRACTOR MUST VISIT THE JOBSITE AND INSPECT ALL TREES AND PALMS TO BE RELOCATED AS WELL AS EXISTING SITE CONDITIONS AND RESTRICTIONS PRIOR TO PREPARING BID.
2. CONTRACTOR MUST VERIFY AND ENSURE THAT ALL TREES AND PALMS IDENTIFIED ON THE PLANS AND THOSE TAGGED ON THE JOBSITE CORRESPOND AS TO NUMBER AND DESCRIPTION. ANY DISCREPANCIES MUST BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT IMMEDIATELY, PRIOR TO PREPARING BID.
3. CONTRACTOR MUST CONDUCT ALL WORK ASSOCIATED WITH RELOCATION AND MAINTENANCE OF TREES AND PALMS TO BE RELOCATED. NO WORK IS TO BE SUBCONTRACTED WITHOUT PRIOR WRITTEN CONSENT OF THE OWNER AND/OR LANDSCAPE ARCHITECT.
4. CONTRACTOR MUST DESIGNATE A COMPETENT, ENGLISH-SPEAKING SUPERVISOR OR FOREMAN OVERSEE AND DIRECT ALL RELOCATION AND MAINTENANCE ACTIVITIES AS OUTLINED IN THESE SPECIFICATIONS.
5. CONTRACTOR MUST SCHEDULE ROOT PRUNING TO PROVIDE THE MAXIMUM POSSIBLE TIME FOR NEW ROOT GROWTH. EVEN TREES AND PALMS THAT TYPICALLY DO NOT REQUIRE LONG (OR ANY) ROOT PRUNING WILL BENEFIT FROM MORE ROOT PRUNING TIME; THEREFORE, ALL TREES AND PALMS TO BE RELOCATED MUST BE ROOT PRUNED. CONTRACTOR MUST PROVIDE A ROOT PRUNE SCHEDULE FOR EACH TREE OR PALM TO BE RELOCATED AS AN ATTACHMENT TO THE BID.
6. CONTRACTOR MUST CALL SUNSHINE 811 TO HAVE ALL UNDERGROUND UTILITIES LOCATED UNDER OR IN THE VICINITY OF THE CURRENT OF FUTURE LOCATIONS OF ALL TREES AND PALMS TO BE RELOCATED PRIOR TO WORK COMMENCING.
7. CONTRACTOR MUST VERIFY WITH THE GENERAL CONTRACTOR THE ABSENCE OF ANY UNDERGROUND CONSTRUCTION OR OBSTRUCTIONS (E.G., BULKHEADS, SEPTIC SYSTEMS, ETC.) IN THE CURRENT AND FUTURE LOCATIONS OF ALL TREES AND PALMS TO BE RELOCATED.
8. CONTRACTOR MUST ALERT THE LANDSCAPE ARCHITECT OF ANY TREES OR PALMS THAT WILL NOT SUCCESSFULLY RELOCATE DUE TO POOR HEALTH PRIOR TO BEGINNING ROOT PRUNING.
9. CONTRACTOR MUST FLAG ALL PROPOSED TRANSPLANT LOCATION FOR THE LANDSCAPE ARCHITECT'S APPROVAL A MINIMUM OF 15 DAYS PRIOR TO RELOCATION.
10. CONTRACTOR MUST ENSURE THAT ALL TREES AND PALMS TO BE RELOCATED ARE INSTALLED AT THE CORRECT GRADE OR ELEVATION, ACCORDING TO THE GRADING PLAN.
11. CONTRACTOR MUST BE ENSURE THAT ALL ROOT FLARES ARE EXPOSED AFTER RELOCATION.
12. CONTRACTOR MUST REMOVE ALL RESIDUAL ROOTS, STUMPS, AND PORTIONS THEREOF AND BACKFILL PITS FROM WHICH RELOCATED TREES AND PALMS WERE REMOVED WITH CLEAN FILL FLUSH WITH THE SURROUNDING GRADE.
13. CONTRACTOR MUST BE REPAIR ANY DAMAGE TO OTHER PLANTS, LAWN, HARDSCAPES, OR NEW CONSTRUCTION WITHIN THE RELOCATION AREA AT CONTRACTOR'S EXPENSE. HARDSCAPES INCLUDE BUT ARE NOT LIMITED TO CURBS, WALKS, ROADS, FENCES, SITE FURNISHINGS, ETC.
14. CONTRACTOR MUST PHOTOGRAPHICALLY DOCUMENT NEW ROOT GROWTH FOLLOWING EACH ROOT PRUNE AND SUBMIT THIS DOCUMENTATION TO THE LANDSCAPE ARCHITECT. THE PURPOSE OF THIS REQUIREMENT IS TO ENSURE THAT SUFFICIENT ROOT GROWTH HAS OCCURRED PRIOR TO THE SECOND AND SUBSEQUENT ROOT PRUNES AND FOLLOWING THE FINAL ROOT PRUNE PRIOR TO RELOCATION.
15. CONTRACTOR MUST INSTALL AND MAINTAIN PROTECTION FENCING AROUND EACH TREE AND PALM TO BE RELOCATED BOTH DURING ROOT PRUNING AND AFTER RELOCATION. PROTECTION FENCING MUST CONSIST OF GALVANIZED WELDED WIRE FABRIC OR PLASTIC MESH ATTACHED TO 4" X 4" POSTS INSERTED AROUND THE PERIMETER OF THE DRIPLINE OF THE TREE OR PALM. PROTECTION FENCING MUST BE PLUMB, TAUT, AND STURDY AT ALL TIMES AND MUST REMAIN IN PLACE THROUGHOUT THE ROOT PRUNING AND WARRANTY PERIODS, OR AS DIRECTED BY THE LANDSCAPE ARCHITECT.
16. CONTRACTOR MUST OBTAIN ALL NECESSARY OR REQUIRED PERMITS FOR THE RELOCATION AND TRANSPORTATION OF THE TREES AND PALMS TO BE RELOCATED.
17. CONTRACTOR MUST GUARANTEE ALL RELOCATED TREES AND PALMS FOR ONE YEAR FROM THE DATE OF RELOCATION TO THE FINAL LOCATION. GUARANTEE MUST INCLUDE TREE HEALTH AND SETTLING.
18. CONTRACTOR MUST PROVIDE ALL MATERIAL NECESSARY TO PERFORM THE WORK COVERED HEREIN, INCLUDING BUT NOT LIMITED TO BACKFILL MATERIAL, PROTECTION FENCING, FLAGGING, ADDITIVES AND SUPPLEMENTS, TEMPORARY IRRIGATION, BURLAP, WIRE, SHRINK WRAP, AND ALL NECESSARY TOOLS AND EQUIPMENT.

TREES PROTECTION NOTES

- CONTRACTOR TO PROTECT ALL EXISTING TREES PRIOR TO THE DEMOLITION OF THE EXISTING STRUCTURE.
- UPON COMPLETION OF OF SITE DEMOLITION, CONTRACTOR TO RELOCATE ALL SPECIFIED TREES AND PALMS FOR RELOCATION. CONTRACTOR TO REINSTALL TREE PROTECTION FENCE AROUND RELOCATED AND EXISTING TREES.
- FENCING AT A MINIMUM FOUR (4) FEET HEIGHT INSTALLED NO CLOSER TO THE TREE TRUNK THAN ITS DRIPLINE. THIS FENCE SHALL BE MAINTAINED IN WORKING ORDER DURING ALL PHASES OF CONSTRUCTION. MAINTAIN TREE PROTECTION ZONES FREE OF WEEDS AND TRASH.
- THE PROJECT LIMIT OF CONSTRUCTION AND ALL EXISTING VEGETATION TO REMAIN IS TO BE CLEARLY DEFINED BY STURDY, WEATHERPROOF FENCING AT A MINIMUM OF FOUR (4) FEET HIGH.
- STURDY TEMPORARY BARRIERS SHALL BE INSTALLED AROUND ALL TREE PROTECTION ZONES. BARRIERS SHALL BE A MINIMUM OF FOUR FEET HIGH, AND SHALL BE CONSTRUCTED OF CONTINUOUS CHAIN LINK FENCE WITH METAL POSTS AT EIGHT-FOOT SPACING, OR OF TWO-BY-FOUR INCH POSTS WITH THREE EQUALLY SPACED TWO-BY-FOUR RAILS. POSTS MAY BE SHIFTED TO AVOID ROOTS.

MAINTENANCE SPECIFICATIONS


- ALL RELOCATED TREES AND PALMS MUST BE MAINTAINED FOR ONE YEAR FROM THE DATE OF RELOCATION TO THEIR FINAL LOCATIONS.
- CONTRACTOR MUST MAINTAIN ALL RELOCATED TREES AND PALMS FOR ONE FULL YEAR FROM THE DATE OF RELOCATION TO THE FINAL LOCATION.
- WHENEVER POSSIBLE, EACH TREE AND PALM MUST BE WATERED BY A PERMANENT AUTOMATIC IRRIGATION SYSTEM FOLLOWING RELOCATION. EACH WATERING MUST THOROUGHLY SATURATE THE ROOTBALL TO ITS FULL DEPTH; THIS WILL REQUIRE 25-50 GALLONS OF WATER FOR SMALL TREES AND PALMS DEPENDING ON ROOTBALL SIZE, WHILE LARGE TREES WILL REQUIRE A MINIMUM OF 10 GALLONS PER FOOT OF ROOTBALL DIAMETER (I.E., A 10' DIAMETER ROOTBALL WILL REQUIRE A MINIMUM OF 100 GALLONS PER WATERING EVENT). WATERING FREQUENCY MUST BE EVERY DAY FOR THE FIRST TWO WEEKS, EVERY OTHER DAY FOR THE NEXT THREE WEEKS, AND EVERY THIRD DAY FOR THE NEXT 6-8 WEEKS.
- WHEN AN AUTOMATIC IRRIGATION SYSTEM IS NOT POSSIBLE, CONTRACTOR IS RESPONSIBLE FOR HAND WATERING RELOCATED TREES AND PALMS THROUGHOUT THE MAINTENANCE PERIOD AND UNTIL FINAL ACCEPTANCE BY THE LANDSCAPE ARCHITECT AND/OR CLIENT.
- IMMEDIATELY AFTER RELOCATION TO THE FINAL LOCATION. A HIGH-PHOSPHORUS ROOT STIMULANT MUST BE APPLIED TO THE SURFACE OF THE ROOTBALL AT THE RECOMMENDED LABEL RATE AND WATERED IN WITH A DRENCH CONSISTING OF A SYSTEMIC INSECTICIDE AND A CONTACT ROOT ROT FUNGICIDE, FOLLOWING LABEL INSTRUCTIONS, AS INITIAL PREVENTATIVE MAINTENANCE.
- EVERY THREE MONTHS THEREAFTER, A HIGH-PHOSPHORUS ROOT STIMULANT MUST BE APPLIED TO THE SURFACE OF THE ROOTBALL AT THE RECOMMENDED LABEL RATE AND WATERED IN WITH A DRENCH CONSISTING OF A SYSTEMIC INSECTICIDE AND A BROAD-SPECTRUM SYSTEMIC FUNGICIDE, FOLLOWING LABEL INSTRUCTIONS, AS CONTINUING PREVENTATIVE MAINTENANCE.
- IRRIGATION AND BRACING MUST BE CHECKED AND EACH TREE OR PALM THOROUGHLY INSPECTED FOR SIGNS OF STRESS, DISEASE, OR PEST PROBLEMS ON A MONTHLY BASIS.
- IMMEDIATELY AFTER RELOCATION TO THE FINAL LOCATION AND EVERY THREE MONTHS THEREAFTER, A HIGH-QUALITY, SLOW-RELEASE 15-2-15 GRANULAR FERTILIZER MUST BE APPLIED, AT THE RECOMMENDED LABEL RATE, SPREAD EVENLY ACROSS THE SURFACE OF THE ROOTBALL.
- IMMEDIATELY AFTER RELOCATION TO THE FINAL LOCATION AND EVERY THREE MONTHS THEREAFTER A HIGH-QUALITY, SLOW-RELEASE 15-2-15 GRANULAR FERTILIZER MUST BE APPLIED, AT THE RECOMMENDED LABEL RATE, SPREAD EVENLY ACROSS THE SURFACE OF THE ROOTBALL.
- FOLIAR FEED FOUR TIMES PER YEAR.
- STRING MUST BE REMOVED FROM THE TIED UP LEAVES IMMEDIATELY AFTER RELOCATION TO THE FINAL LOCATION IF THE PALM WAS ROOT PRUNED OR WITHIN 30-45 DAYS AFTER RELOCATION ON THE OCCASION THE LANDSCAPE ARCHITECT APPROVED RELOCATION WITHOUT ROOT PRUNING DUE TO TIME CONSTRAINTS.
- IMMEDIATELY AFTER RELOCATION TO THE FINAL LOCATION AND EVERY THREE MONTHS THEREAFTER A HIGH-QUALITY, SLOW-RELEASE 8-4-12 GRANULAR PALM FERTILIZER WITH MINORS MUST BE APPLIED. AT THE RECOMMENDED LABEL RATE, SPREAD EVENLY ACROSS THE SURFACE OF THE ROOTBALL.
- FOLIAR FEED PALMS SIX TIMES PER YEAR.

RELOCATION SPECIFICATIONS

- LANDSCAPE CONTRACTOR TO FLAG ALL PROPOSED PLANT LOCATIONS FOR LANDSCAPE ARCHITECT'S APPROVAL PRIOR TO INSTALLATION. NOTIFY LANDSCAPE ARCHITECT A MINIMUM OF 15 DAYS PRIOR TO REVIEW.
- ALL TREES AND PALMS TO BE RELOCATED MUST BE WATERED DAILY FOR AT LEAST 5 DAYS PRIOR TO ANY RELOCATION TO ENSURE THAT THEY ARE FULLY HYDRATED. EACH WATERING MUST THOROUGHLY SATURATE THE ROOTBALL TO ITS FULL DEPTH.
- ALL ROOTBALLS MUST BE WRAPPED IN BURLAP AND THE TIGHTLY WIRE-WRAPPED (USING REDLINE HORSE WIRE OR EQUIVALENT) TO KEEP THE ENTIRE ROOTBALL INTACT DURING RELOCATION. TREES AND PALMS GROWING IN LIMESTONE MUST BE DUG AND RELOCATED WITH THE ROOT ATTACHED TO A SECTION OF ROCK AS PART OF THE ROOTBALL SUCH THAT THE ROOTS REMAIN INTACT. ROOTBALLS COMING FROM SAND OR SANDY SOIL MAY ALSO NEED TO BE BOXED PRIOR TO RELOCATION, AT THE DISCRETION OF THE LANDSCAPE ARCHITECT.
- TREES AND PALMS BEING RELOCATED OFFSITE MUST HAVE THEIR ENTIRE ROOTBALLS THOROUGHLY AND TIGHTLY WRAPPED WITH PLASTIC SHRINK WRAP ON THE OUTSIDE OF THE WIRE WRAP, AND THE ENTIRE TREE OR PALM (INCLUDING CANOPY, TRUNK, AND ROOTBALL) MUST BE COVERED WITH A BREATHABLE TARP (E.G., SHADE CLOTH) DURING TRANSPORT.
- NEW PLANTING PITS FOR RELOCATED TREES AND PALMS MUST BE PREPARED PRIOR TO LIFTING THE PALM OR TREE FROM ITS CURRENT LOCATION AND MUST BE AT LEAST 3-4 FEET WIDER THAN THE ROOTBALL AND THE SAME DEPTH AS THE ROOTBALL, SUCH THAT THE FINAL ELEVATION OF THE TOP OF THE ROOTBALL IS AT OR SLIGHTLY ABOVE (NO MORE THAN 2" HIGHER) FINAL GRADE.
- TREES AND PALMS TO BE RELOCATED MUST BE LIFTED BY THE ROOTBALL ONLY, USING APPROPRIATELY SIZED (LENGTH AND STRENGTH) LIFTING STRAPS OR CHAINS. DURING LIFTING, THE TREE OR PALM MUST BE BALANCED IN A MORE-OR-LESS UPRIGHT POSITION, WITH THE STRAP THE TRUNK USED ONLY FOR BALANCING AND MANEUVERING THE TREE OR PALM INTO A POSITION. NO CHAINS MAY BE USED AROUND OR AGAINST THE TRUNK AT ANY TIME. AT NO TIME SHALL 100% OF THE WEIGHT OF THE TREE OR PALM BE ON THE STRAP ATTACHED TO THE TRUNK. TRUNKS MUST BE HEAVILY PADDED WITH 30-60 LAYERS (DEPENDING ON SIZE AND WEIGHT) OF BURLAP BENEATH THE BALANCING STRAP.
- TREES AND PALMS MUST BE LIFTED WITH A CRANE OR BACKHOE APPROPRIATELY SIZED FOR THE SIZE AND WEIGHT OF THE TREE OR PALM AND LIFTED OR CARRIED DIRECTLY TO THE FINAL INSTALL LOCATION OR TRANSPORT TRAILER.
- ONCE LIFTING BEINGS, ANY UN CUT ROOTS UNDER OR AROUND THE ROOTBALL THAT MAY YET REMAIN MUST BE IMMEDIATELY SEVERED WITH HAND PRUNING TOOLS TO MINIMIZE TEARING AND ROOT DAMAGE.
- AGRIFORM PLANTING TABLETS (OR APPROVED EQUIVALENT) MUST BE EVENLY DISTRIBUTED AROUND THE PERIMETER OF THE PLANTING PIT AT THE RATE OF 2 TABLETS PER 1" TRUNK CALIPER PRIOR TO BACKFILLING.
- MYCORRHIZA (ROOTS® TRANSPLANT OR EQUIVALENT) MUST BE INCORPORATED INTO THE BACKFILL SOIL PRIOR TO BACKFILLING.
- RELOCATED TREES AND PALMS MUST BE CENTERED IN THE PLANTING PIT, AND THE PIT BACKFILLED USING A 1:1 MIXTURE OF EXISTING SOIL AND 80:20 (DOT SAND:MUCK) SOIL MIX THOROUGHLY BLENDED TOGETHER. DO NOT USE MUDDY SOIL AS BACKFILL.
- SMALL TREES AND PALMS MUST BE FIRMLY BRACED USING A MINIMUM OF FOUR 4"X 4" WOODEN BRACES ATTACHED TO 2" X 4" WOODEN BATTENS HELD IN PLACE WITH TWO STEEL BANDS. LARGER TREES MAY REQUIRE 6"X 6" WOODEN POSTS OR EVEN TELEPHONE POLES TO PROVIDE SUFFICIENT BRACING STRENGTH TO PREVENT TOPPLING DURING WIND EVENTS. A SUFFICIENT NUMBER OF BATTENS MUST BE STRATEGICALLY PLACED AROUND THE TRUNK SUCH THAT THE STEEL BANDS NEVER CONTACT THE TRUNK. NO BURLAP IS TO REMAIN UNDER THE WOODEN BATTENS ON TREES DURING BRACING, BUT SEVERAL LAYERS OF BURLAP SHOULD BE LEFT UNDER THE WOODEN BATTENS WHEN BRACING PALMS. NAILS SHALL NEVER BE DRIVEN DIRECTLY INTO THE TRUNK DURING BRACING. BRACING MUST REMAIN IN PLACE FOR A MINIMUM OF ONE YEAR.
- A TREE RING WITH A MINIMUM HEIGHT OF 6" MUST BE CONSTRUCTED 6-12" OUTSIDE THE OUTERMOST EDGE OF THE ROOTBALL AND AROUND THE ENTIRE PERIMETER OF THE ROOTBALL TO DIRECT IRRIGATION WATER AND ANY SUPPLEMENTS THAT ARE ADDED DOWN INTO THE ROOTBALL DURING ROOT REGENERATION.
- ONCE THE TREE RING IS CONSTRUCTED, A HIGH-PHOSPHORUS ROOT STIMULANT MUST BE LIBERALLY APPLIED TO THE SURFACE AND THOROUGHLY WATERED IN.
- ROOTBALLS MUST BE A THOROUGHLY WATERED IN USING A HOSE AND JOHNSON BAR INSERTED TO THE VERY BOTTOM OF THE ROOTBALL AND SWUNG BACK AND FORTH TO PREVENT FORMATION OF AIR POCKETS. THE JOHNSON BAR TECHNIQUE MUST BE REPEATED AT LEAST ONCE MORE WITHIN 6" OF THE TRUNK. MULCH MUST NOT BE APPLIED OR ALLOWED TO ACCUMULATE DIRECTLY AGAINST THE TRUNK.
- ORGANIC MULCH (MELALEUCA IS PREFERRED) MUST BE APPLIED WITHIN 48 HOURS OF RELOCATION AT A DEPTH OF 3-4" OVER THE ENTIRE TOP OF THE ROOTBALL FROM THE TREE RING TO WITHIN 6" OF THE TRUNK. MULCH MUST NOT BE APPLIED OR ALLOWED TO ACCUMULATE DIRECTLY AGAINST THE TRUNK.
- PITS FROM WHICH THE RELOCATED TREES AND PALMS WERE REMOVED MUST BE CLEANED OFF ALL RESIDUAL ROOTS, STUMPS, AND PORTIONS THEREOF AND BACKFILLED WITH CLEAN FILL FLUSH WITH THE SURROUNDING GRADE.
- RESTORE THE SURFACE WITH MATERIAL TO MATCH ADJACENT AREAS, MATERIAL TO BE APPROVED BY LANDSCAPE ARCHITECT. CONTRACTOR TO PROVIDE A MINIMUM OF ONE YEAR WARRANTY ON SETTLING AND PLANT MATERIAL FROM THE SUBSTANTIAL COMPLETION.
- MULTI-TRUNK TREES AND PALMS MUST BE RELOCATED AS ONE UNIT WITH A SINGLE ROOTBALL.
- PLANTING PITS FOR EDIBLE DATE PALMS (PHOENIX DACTYLIFERA) MUST BE BACKFILLED WITH PURE DOT SILICA SAND.

WARRANTY NOTES

- ALL RELOCATED TREES AND PALMS MUST BE GUARANTEED FOR ONE YEAR FROM THE DATE OF RELOCATION TO THEIR FINAL LOCATIONS.
- IF A TREE OR PALM DIES WITHIN THE 1-YEAR WARRANTY PERIOD, IT MUST BE REMOVED AND REPLACED AT CONTRACTOR'S EXPENSE.
- IF A TREE OR PALM PERFORMS POORLY WITHIN THE 1-YEAR WARRANTY PERIOD, IT MUST BE REMOVED AND REPLACED AT CONTRACTOR'S EXPENSE. THE DECISION TO REPLACE BASED ON POOR HEALTH IS AT THE DISCRETION OF THE LANDSCAPE ARCHITECT.
- IF A TREE OR PALM SETTLES TO AN UNHEALTHY DEPTH WITHIN THE 1-YEAR WARRANTY PERIOD, AS DEEMED BY THE BY THE LANDSCAPE ARCHITECT, IT MUST BE RAISED TO THE CORRECT GRADE AT CONTRACTOR'S EXPENSE.

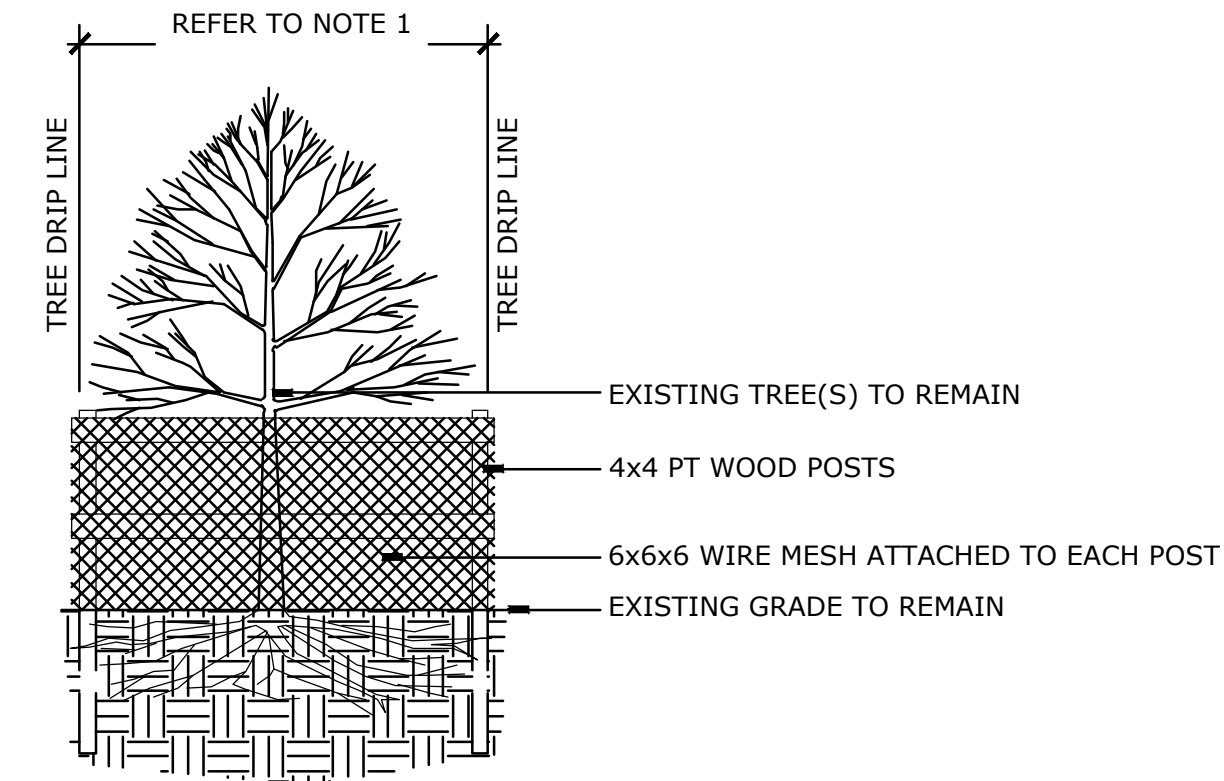


NOTE:

- DUE TO SITE CONSTRAINTS TREE PROTECTION FENCE MAY BE CONTINUOUS TO PROTECT MULTIPLE TREES. TREE PROTECTION FENCE TO BE INSTALLED AT EDGE OF EXISTING HARDSCAPE, WHERE SPACE ALLOWS TREE PROTECTION FENCE TO ALIGN WITH DRIPLINE OF TREE / PALM.
- MAINTAIN FENCE THROUGHOUT CONSTRUCTION.
- REFER TO LOCAL, STATE AND FEDERAL JURISDICTIONS AND GOVERNING BODIES/AGENCIES FOR ADDITIONAL REQUIREMENTS.

1 TREE PROTECTION FENCE

Scale: 1/4" = 1'- 0"

SEAL (\$ TYLER NIELSEN - LA6667067)

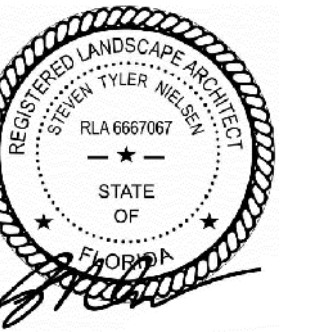

08.07.2024

TREE DISPOSITION NOTES

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L101

REFERENCE IMAGERY



THE SALTER GARDEN

6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

TREE DISPOSITION SCHEDULE

#	BOTANICAL NAME	COMMON NAME	DBH.	HT.	SPREAD	ACTION	NOTES
1	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
2	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
3	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
4	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
5	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
6	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	16'	12'	PRESERVE	CONTRACTOR TO PROTECT AND CARE FOR PLANT MATERIAL
7	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
8	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
9	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	18'	12'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
10	PHOENIX ROEBELII	PYGMY DATE PALM	4"	12'	20'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
11	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	8"	12'	8'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
12	COCOS NUCIFERA	COCONUT PALM	10"	30'	16'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
13	COCOS NUCIFERA	COCONUT PALM	10"	30'	16'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
14	COCOS NUCIFERA	COCONUT PALM	10"	30'	16'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
15	COCOS NUCIFERA	COCONUT PALM	10"	30'	16'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
16	PERSEA AMERICANA	AVOCADO	10"	25'	20'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
17	STRELITZIA NICOLAI	WHITE BIRD OF PARADISE	5"	25'	12'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION
18	UNKNOWN	UNKNOWN	5"	10'	8'	REMOVE	PLANT MATERIAL DOES NOT CORRESPOND WITH PROPOSED PLANT COMPOSITION

MITIGATION NOTES

THE PROPOSED LANDSCAPE PLAN MUST MITIGATE THE REMOVAL OF 5 PALMS AND 3 TREES WITH A TOTAL OF:

(6) TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM

(4) TREES 4 IN. DBH. x 8 FT. SPR. x 16 FT. HT.

NO MITIGATION REQUIRED FOR REMOVAL OF INVASIVE TREES.

TOTAL REMOVALS

- 5 PALMS REMOVED
- 3 TREES REMOVED
- 0 INVASIVE TREES REMOVED

THE PLANTING PLAN PROPOSES TO MITIGATE WITH THE FOLLOWING STRATEGY:


(6) CLUSIA ROSEA TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM
*(18 TREE CREDITS)

(2) COCCOLOBA UVIFERA TREES 4 IN. DBH. X 8 FT. SPR. HT. 16 FT. HT.
*(4 TREE CREDITS)

(2) COCCOLOBA DIVERSIFOLIA TREES 4 IN. DBH. X 8 FT. SPR. X 16 FT. HT.
*(4 TREE CREDITS)

REFER TO SHEET L700 & L701 FOR MITIGATION TREES & PALMS SPECIES, SPECIFICATIONS, AND LAYOUT.


SEAL (S TYLER NIELSEN - LA6667067)

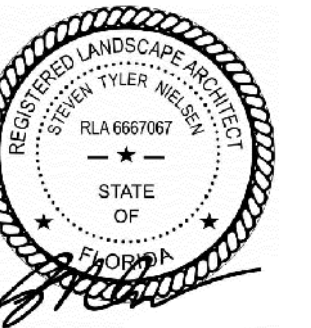

08.07.2024

TREE REFERENCE IMAGES

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

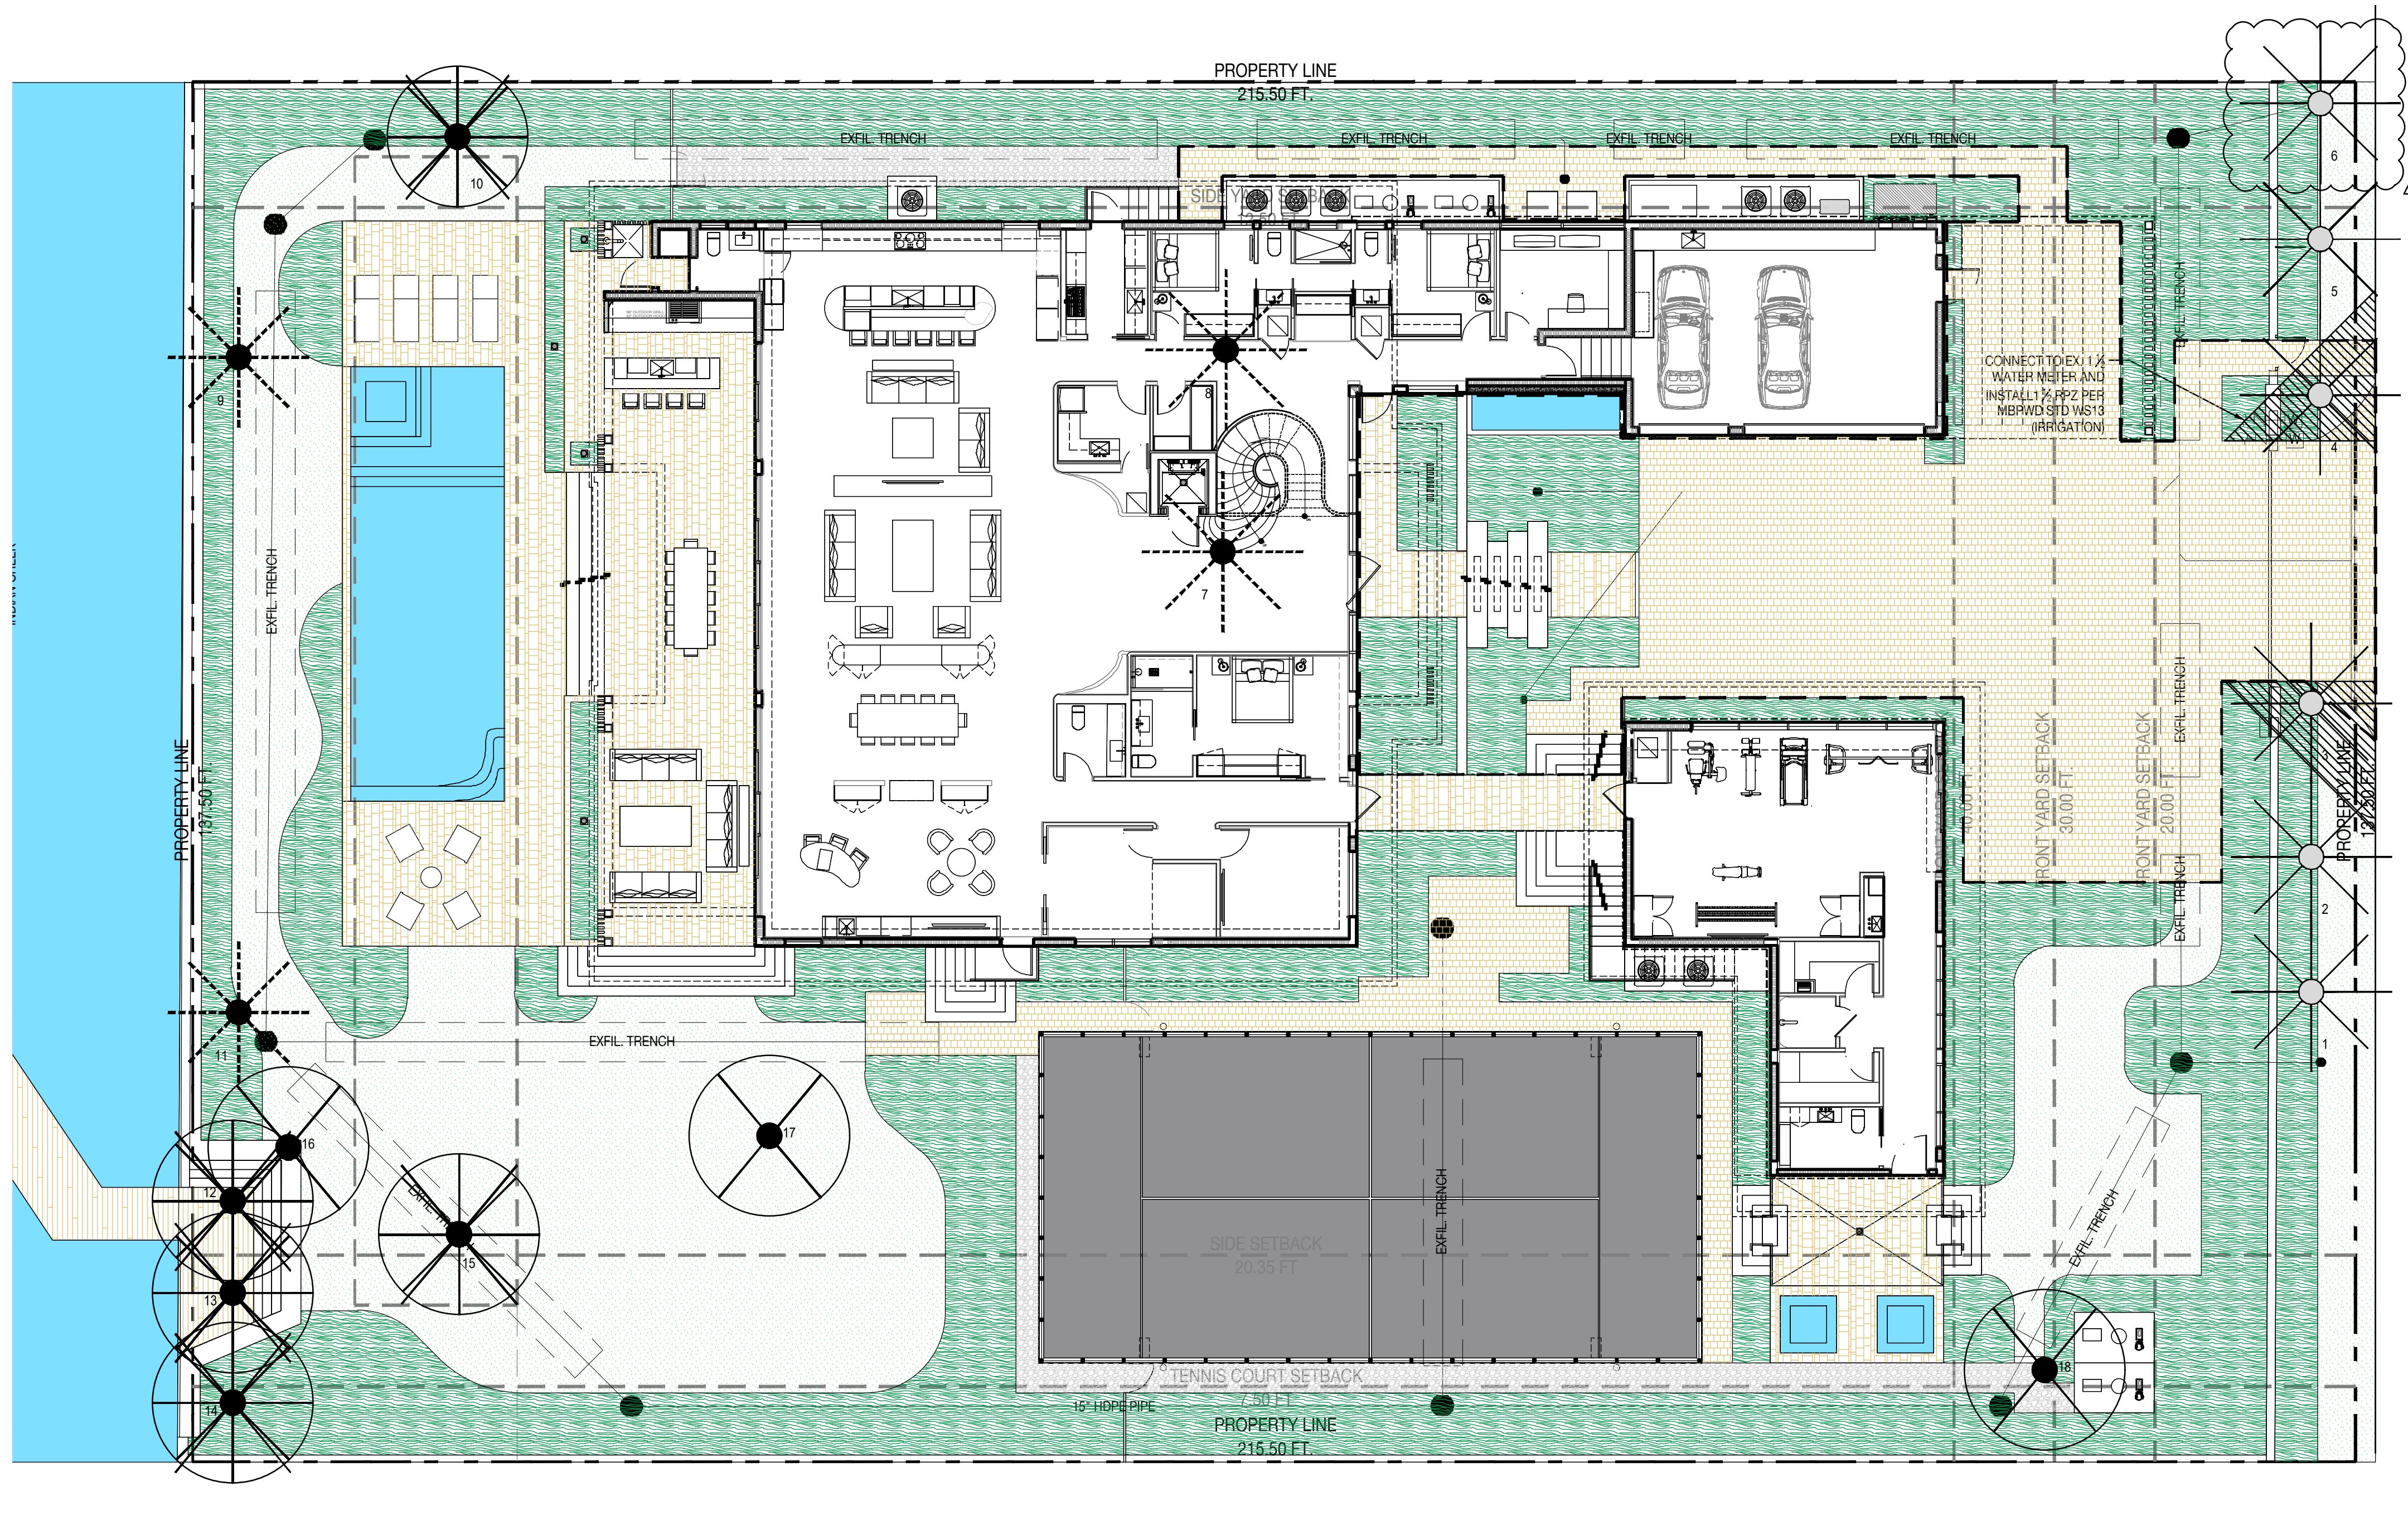

THE SALTER GARDEN
6470 GARDEN | 6470 ALISON RD. | MIAMI BEACH, FLORIDA 33141

TREE DISPOSITION SCHEDULE

#	BOTANICAL NAME	COMMON NAME	ACTION
1	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
2	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
3	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
4	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
5	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
6	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	PRESERVE
7	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	RELOCATE
8	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	RELOCATE
9	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	RELOCATE
10	PHOENIX ROEBELENI	PYGMY DATE PALM	REMOVE
11	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	RELOCATE
12	COCOS NUCIFERA	COCONUT PALM	REMOVE
13	COCOS NUCIFERA	COCONUT PALM	REMOVE
14	COCOS NUCIFERA	COCONUT PALM	REMOVE
15	COCOS NUCIFERA	COCONUT PALM	REMOVE
16	PERSEA AMERICANA	AVOCADO	REMOVE
17	STRELITZIA NICOLAI	WHITE BIRD OF PARADISE	REMOVE
18	UNKNOWN	UNKNOWN	REMOVE

MITIGATION NOTES

THE PROPOSED LANDSCAPE PLAN MUST MITIGATE THE REMOVAL OF 5 PALMS AND 3 TREES WITH A TOTAL OF:

(6) TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM

(4) TREES 4 IN. DBH. x 8 FT. SPR. x 16 FT. HT.

NO MITIGATION REQUIRED FOR REMOVAL OF INVASIVE TREES.

TOTAL REMOVALS

- 5 PALMS REMOVED
- 3 TREES REMOVED
- 0 INVASIVE TREES REMOVED

THE PLANTING PLAN PROPOSES TO MITIGATE WITH THE FOLLOWING STRATEGY:


(6) CLUSIA ROSEA TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM
*(18 TREE CREDITS)

(2) COCCOLOBA UVIFERA TREES 4 IN. DBH. X 8 FT. SPR. HT. 16 FT. HT.
*(4 TREE CREDITS)


(2) COCCOLOBA DIVERSIFOLIA TREES 4 IN. DBH. X 8 FT. SPR. X 16 FT. HT.
*(4 TREE CREDITS)

REFER TO SHEET L700 & L701 FOR MITIGATION TREES & PALMS SPECIES, SPECIFICATIONS, AND LAYOUT.

TREE DISPOSITION LEGEND

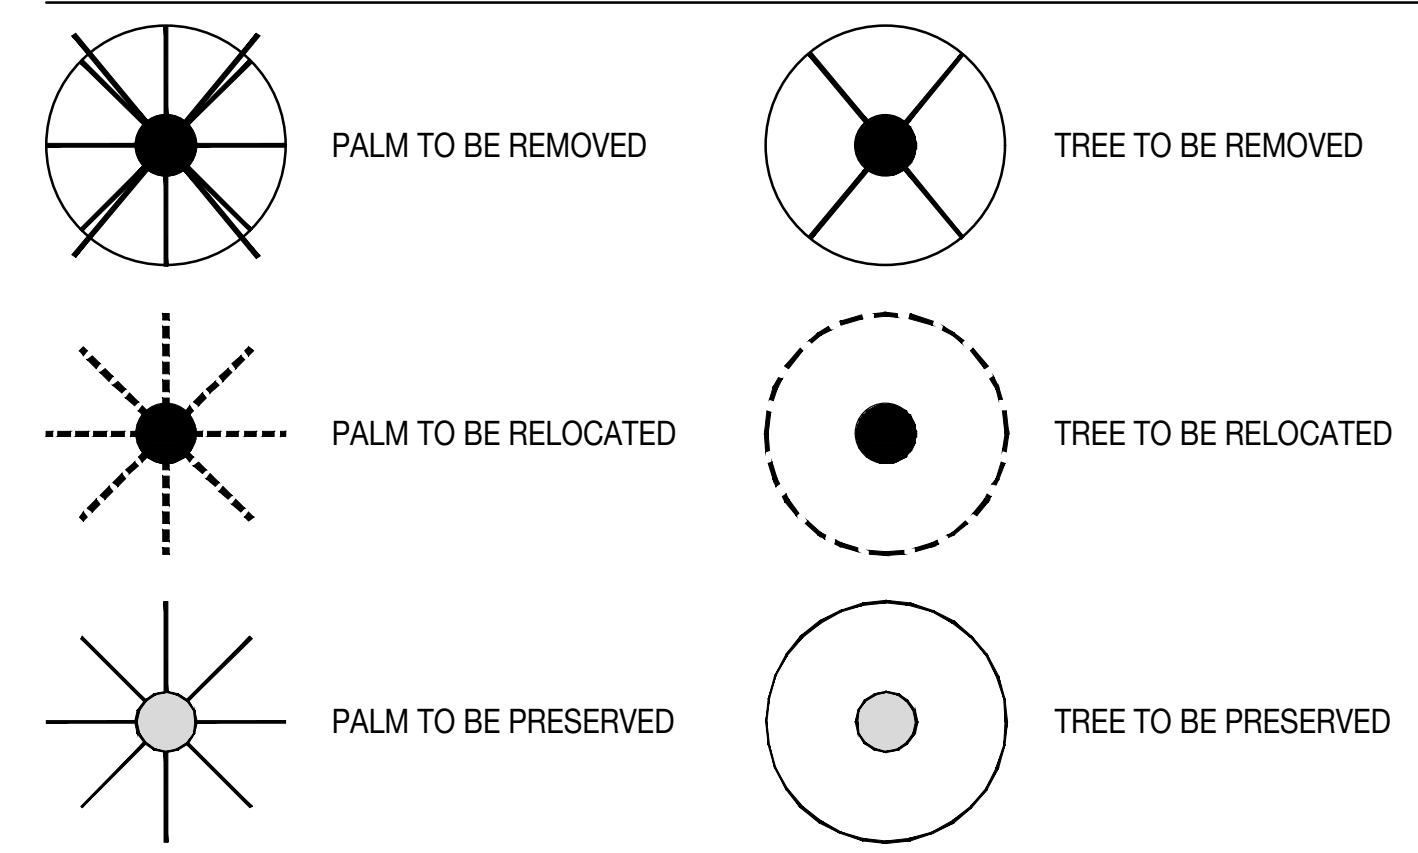



SEAL (S TYLER NIELSEN - LA6667067)

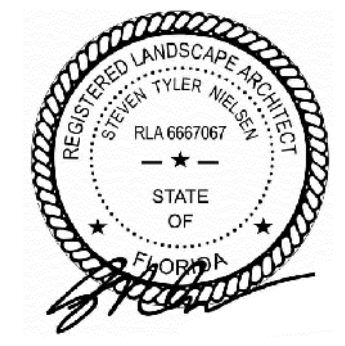

TREE DISPOSITION PLAN

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

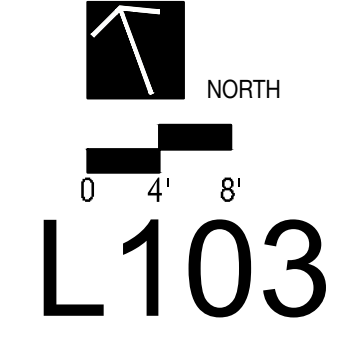


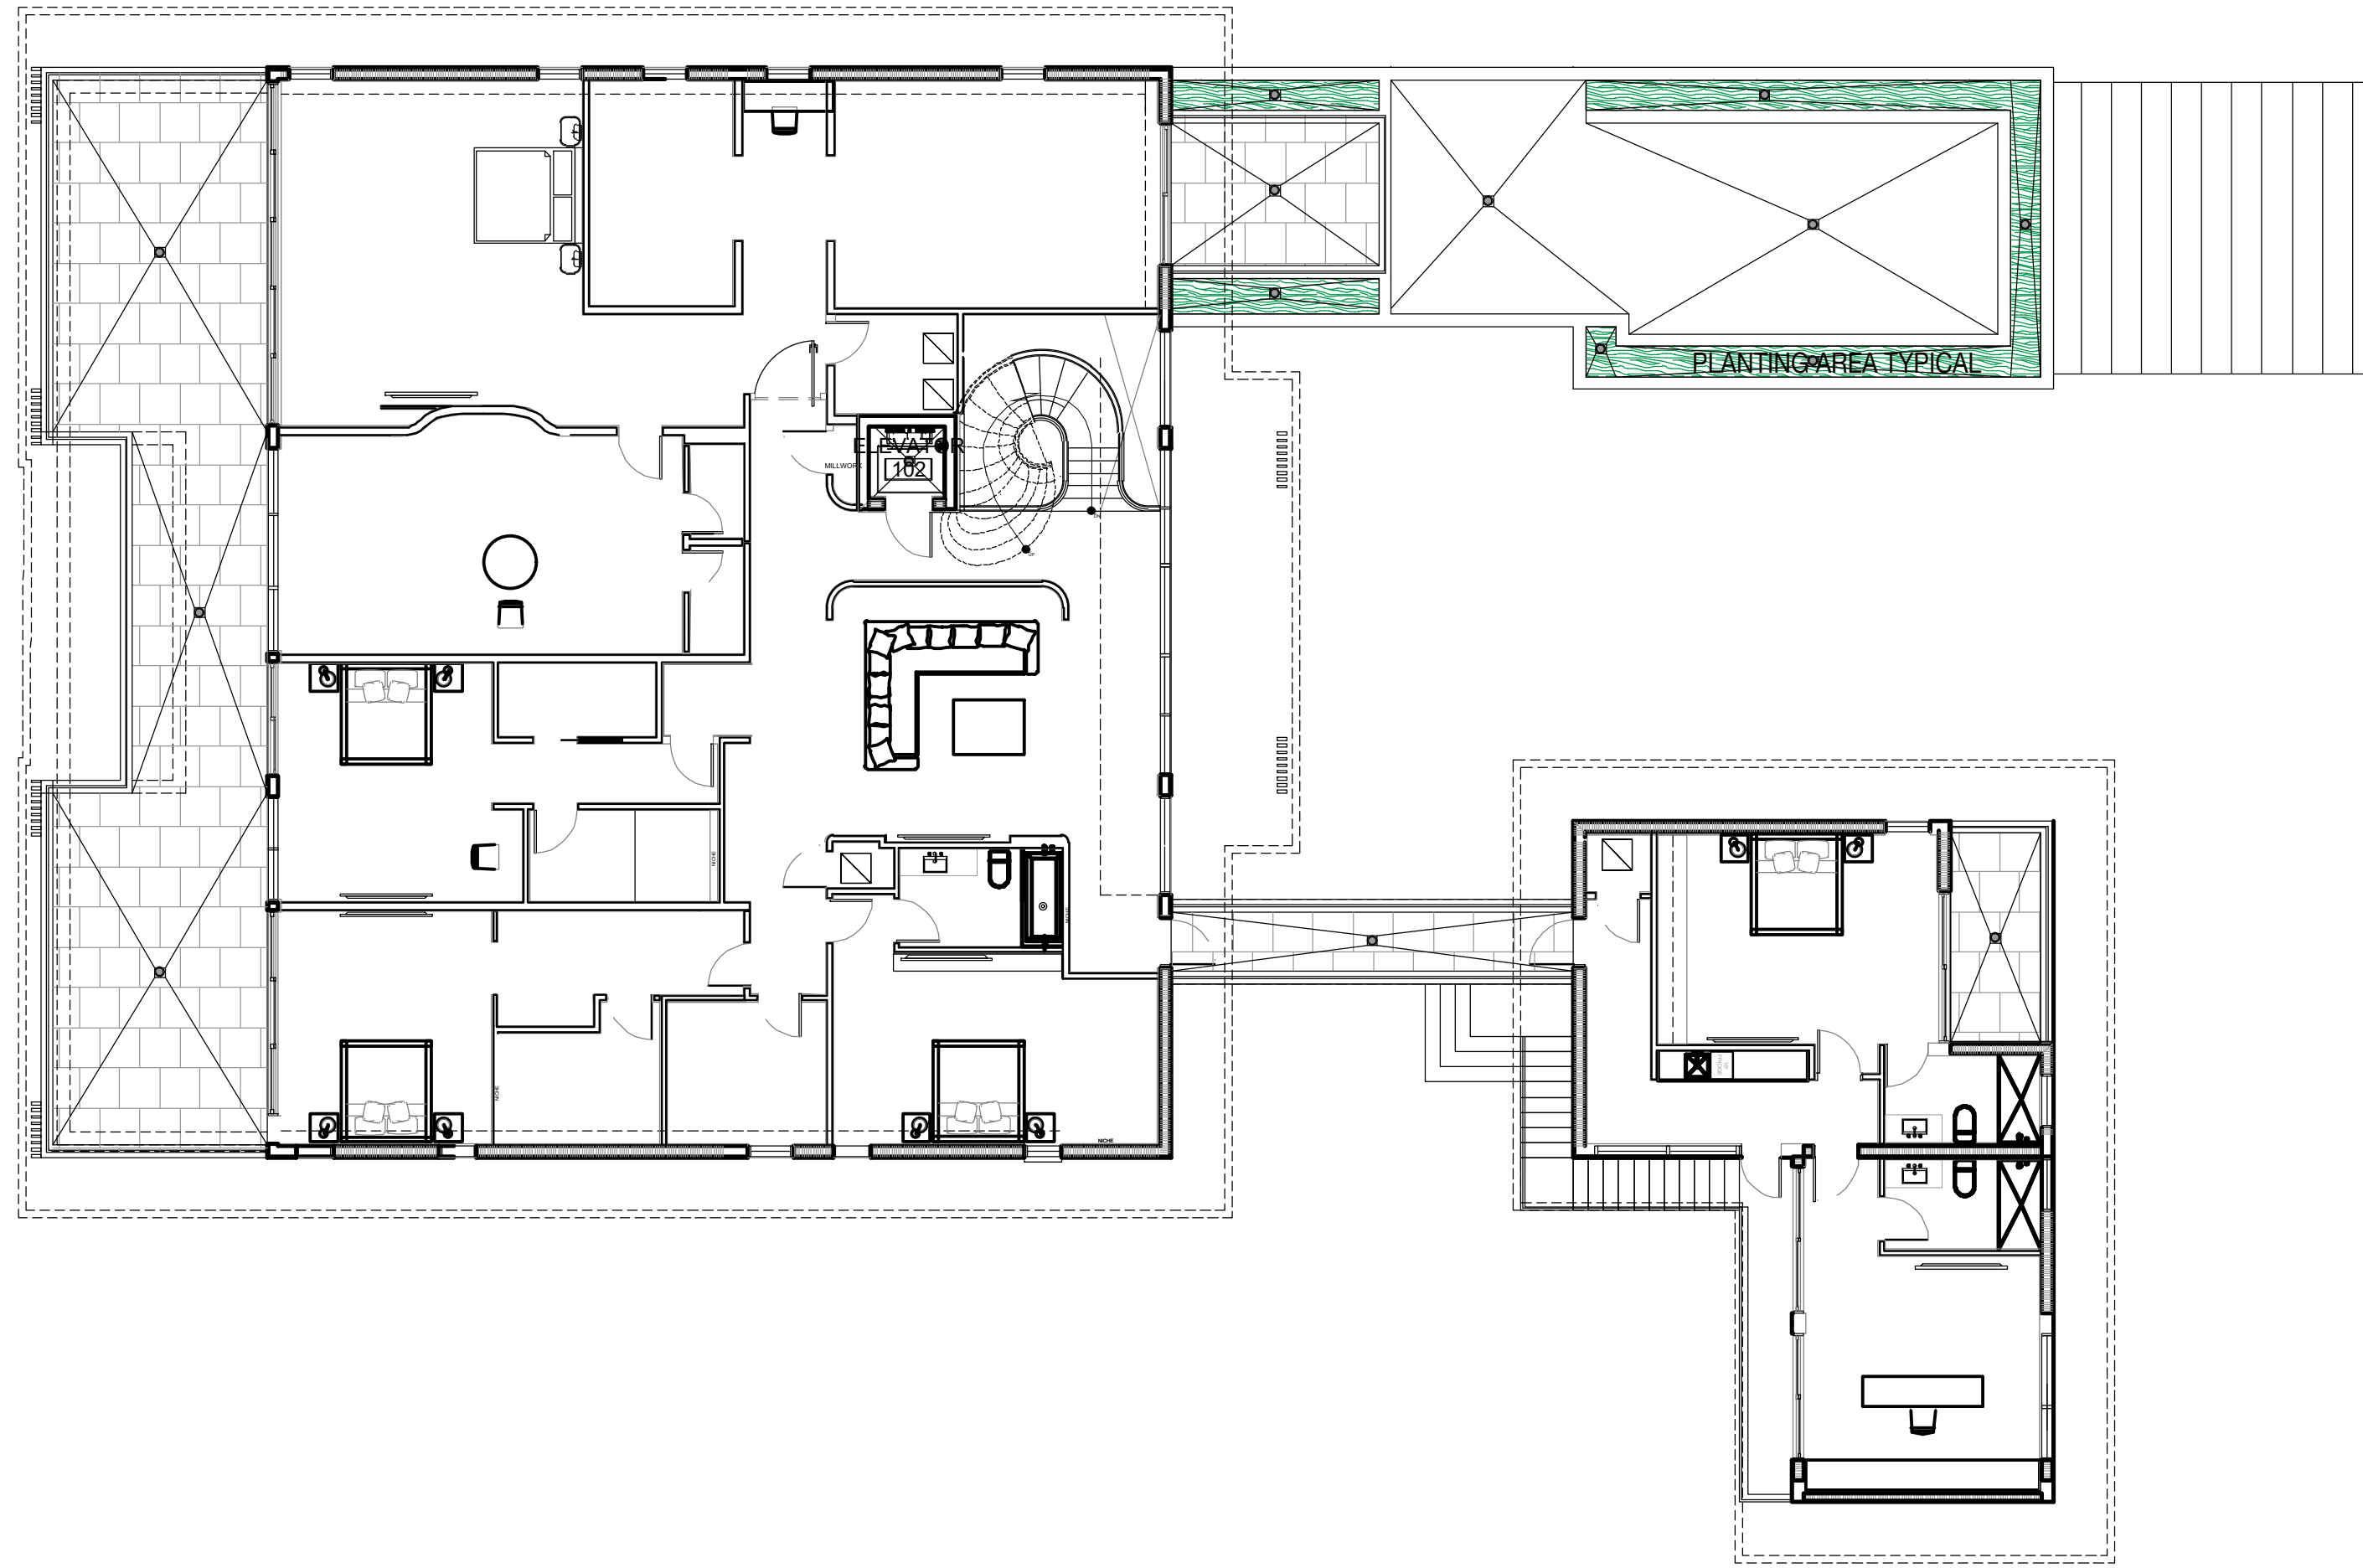

MATERIALS LEGEND




SEAL (S TYLER NIELSEN - LA6667067)

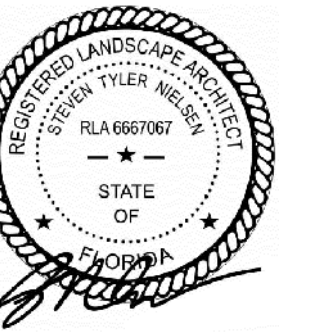

08.07.2024

SECOND LEVEL MATERIALS PLAN

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

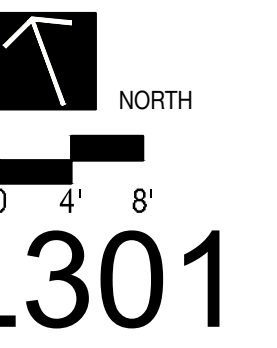

L301

PLANTING NOTES

- PLANT MATERIAL IS TO BE HEALTHY SPECIMENS FREE FROM DISEASE OR DAMAGE, AND IS TO BE MAINTAINED IN EXCELLENT CONDITION WHILE ON THE JOBSITE. LANDSCAPE ARCHITECT SHALL INSPECT PLANT MATERIAL UPON ARRIVAL TO JOBSITE AND WILL REJECT PLANT MATERIAL THAT DOES NOT MEET THE STANDARDS DESCRIBED WITHIN THE CONTRACT DOCUMENTS.
- THE LANDSCAPE ARCHITECT WILL PERIODICALLY INSPECT PLANT MATERIAL STOCKPILED AND/OR PLANTED ON SITE DURING THE COURSE OF CONSTRUCTION. PLANT MATERIAL NOT MEETING THE STANDARDS CONTAINED WITHIN CONTRACT DOCUMENTS SHALL BE REPLACED AT NO COST TO THE OWNER.
- PROVIDE MATCHING SIZES AND FORMS FOR EACH PLANT OF THE SAME SPECIES UNLESS OTHERWISE INDICATED.
- CONTRACTOR TO VERIFY ALL QUANTITIES. IN CASE OF DISCREPANCIES, GRAPHICALLY SHOWN QUANTITIES SHALL TAKE PRECEDENCE.
- ALL MATERIALS USED SHALL CONFORM TO THE GUIDELINES ESTABLISHED BY THE CURRENT AMERICAN STANDARDS FOR NURSERY STOCK, PUBLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMEN.
- ALL PLANT MATERIAL SHALL BE INSTALLED PLUMB AND PER THE SPECIFICATIONS CONTAINED WITHIN THE CONTRACT DOCUMENTS. ANY NECESSARY STAKING AND/OR OTHER SUPPORTS MATERIALS/METHODS SHALL BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO INSTALLATION.
- THE CONTRACTOR SHALL PRUNE EXISTING AND/OR NEW TREES ONLY PER LANDSCAPE ARCHITECT DIRECTION.
- THE CONTRACTOR SHALL STAKE THE LOCATIONS OF ALL TREES AND B&B SHRUBS FOR LANDSCAPE ARCHITECT REVIEW AND APPROVAL, PRIOR TO INSTALLATION.
- ALL ROOT-WRAPPING MATERIALS THAT ARE NOT BIO-DEGRADABLE SHALL BE REMOVED FROM THE ROOT BALL. ROOT BALLS SHALL BE FREE OF WEEDS.
- SPECIFIED PLANT MATERIAL SIZES SHALL BE CONSIDERED MINIMUM SIZES.
- FINISH GRADE OF PLANTING BEDS SHALL BE ONE (1) INCH BELOW ADJACENT FLATWORK, UNLESS SPECIFIED OTHERWISE.
- MULCH OR PLANTING BED DRESSING SHALL BE PLACED IN ALL PLANTING AREAS AS SPECIFIED. MULCH OR PLANTING BED DRESSING SHALL NOT BE PLACED WITHIN SIX (6) INCHES OF TREE TRUNKS. MULCHING SHOULD BE REPEATED ANNUALLY DURING THE AUTUMN TO A THREE (3) INCH DEPTH.
- ALL PLANT MATERIAL SHOULD RECEIVE AN ORGANIC FERTILIZER IN LIMITED APPLICATION FOLLOWING INSTALLATION. TYPE AND APPLICATION RATE AND METHOD OF APPLICATION TO BE SPECIFIED BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT.
- EXCESS FERTILIZER SHALL BE DISPOSED OF PROPERLY OFF-SITE. IT SHALL NOT BE DISPOSED OF IN STORM DRAINS AND/OR DRYWELLS.
- STOCKPILED PLANT MATERIAL TO BE PLACED IN THE SHADE AND PROPERLY HAND-WATERED UNTIL PLANTED.
- MINI-NUGGET TYPE DECORATIVE BARK MULCH WILL BE USED TO RETURN NUTRIENTS TO THE SOIL, REDUCE MAINTENANCE AND MINIMIZE EVAPORATION FOR AREAS APPROXIMATE TO THE RESIDENCE. LARGER SHREDDED BARK MULCH WILL BE USED FOR STEEP AREAS SO SLOUGHING IS LESS LIKELY TO OCCUR.
- PRESERVE & PROTECT ALL EXISTING VEGETATION INDICATED TO REMAIN AT ALL TIMES.
- ALL VEGETATION PROPOSED FOR OUTSIDE THE BUILDING ENVELOPE TO BE NATIVE UNLESS OTHERWISE NOTED. PLANTING THAT OCCURS OUTSIDE THE BUILDING ENVELOPE IS FOR RESTORATION PURPOSES ONLY OR IS SPECIFIC TO UTILITIES RESTORATION.
- SIX (6) INCH PLANT MIX SHALL BE PROVIDED FOR ALL LAWN, TURF, AND NATIVE PLANTING ZONES. 18 INCH PLANT MIX SHALL BE PROVIDED FOR ALL PERENNIAL PLANTING BEDS UNLESS OTHERWISE NOTED.
- ALL PLANT MATERIAL SHALL BE FLORIDA GRADE #1 OR BETTER AS OUTLINED IN GRADES AND STANDARDS FOR NURSERY PLANTS, PARTS I AND II OF THE LATEST EDITION, PUBLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES.
- NURSERY SUPPORT POLES SHALL BE REMOVED AT THE NURSERY, PRIOR TO DELIVERY. ANY TREE DELIVERED WITH NURSERY POLES WILL NOT BE ACCEPTED FOR INSTALLATION. EXCEPTIONS FOR THE FOLLOWING TWO SPECIES: CONOCARPUS ERECTUS 'SERICEUS' AND CLUSIA ROSEA.

CITY OF MIAMI BEACH

LANDSCAPE LEGEND

INFORMATION REQUIRED TO BE PERMANENTLY AFFIXED TO PLANS
Zoning District: RS-3 Lot Area: 29,095 Acres: .66

	REQUIRED/ ALLOWED	PROVIDED
A. Square feet of required Open Space as indicated on site plan: lot Area = <u>29,095</u> s.f. x <u>.09</u> % = <u>2,618</u> s.f.	<u>2,618</u>	<u>10,910</u>
B. Square feet of parking lot open space required as indicated on site plan: Number of parking spaces: <u>NA</u> x 10 s.f. parking space =	<u>NA</u>	<u>NA</u>
C. Total square feet of landscaped open space required: A+B	<u>2,618</u>	<u>8,787</u>

LAWN AREA CALCULATION

A. Square feet of landscaped open space required	<u>2,618</u>	<u>10,320</u>
B. Maximum lawn area (soil) permitted: <u>.50</u> % x <u>10,320</u>	<u>5,160</u>	<u>3,837</u>

TREES

A. Number of trees required per lot or net lot acre, less existing number of trees meeting minimum requirements: <u>3</u> trees x <u>0.66</u> net lot acres - number of existing trees =	<u>29</u>	<u>42</u>
B. % Natives required: Number of trees provided x 30% =	<u>13</u>	<u>36</u>
C. % Low maintenance / drought and salt tolerant required: Number of trees provided x 50% =	<u>21</u>	<u>42</u>
D. Street trees (maximum average spacing of 20' o.c.): <u>135</u> linear feet along street divided by 20' =	<u>7</u>	<u>7</u>
E. Street tree species allowed directly beneath power lines: (maximum average spacing of 20' o.c.): <u>N/A</u> linear feet along street divided by 20' =	<u>N/A</u>	<u>N/A</u>

SHRUBS

A. Number of shrubs required: Sum of lot and street trees required x 12 =	<u>432</u>	<u>479</u>
B. % Native shrubs required: Number of shrubs provided x 50% =	<u>96</u>	<u>252</u>

LARGE SHRUBS OR SMALL TREES

A. Number of large shrubs or small trees required: Number of required shrubs x 10% =	<u>43</u>	<u>48</u>
B. % Native large shrubs or small trees required: Number of large shrubs or small trees provided x 50% =	<u>24</u>	<u>48</u>

PLANTING SCHEDULE

ABR.	QUANTITY	BOTANICAL NAME	COMMON NAME	SPECIFICATIONS
TREES				
CRO	8	CLUSIA ROSEA	PITCH APPLE	200 GAL. MULTI-LEADER 18 FT. HT. TREE-FORM
CER	17	CONOCARPUS ERECTUS	GREEN BUTTONWOOD	FG. SINGLE LEADER. STANDARD, 6 IN. DBH. 18 FT. HT.
CUV	2	COCCOLOBA UVIFERA	SEA GRAPE	FG. 4 IN. DBH. 16 FT. HT.
CDI	2	COCCOLOBA DIVERSIFOLIA	PIGEON PLUM	FG. 4 IN. DBH. 16 FT. HT.
MFR	7	MYRCIANTHES FRAGRANS	SIMPSON'S STOPPER	FG. 4 IN. DBH. 16 FT. HT. 8 FT. CT.
PRA	3	PIMENTA RACEMOSA	BAY RUM	FG. 4 IN. DBH. 16 FT. HT. 8 FT. CT.
MCH	3	MICHELIA CHAMPACA ALBA	SAME	FG. 4 IN. DBH. 16 FT. HT. 8 FT. CT.
PALMS				
REL	8	ROYSTONEA ELATA	ROYAL PALM	18 FT. CT
CNU	14	COCOS NUCIFERA 'GREEN MALAYAN'	COCONUT PALM	FG. 18-24 FT. GW.
CBA	1	COPERNICIA BAILEYANA	BAILEY PALM	FG 16. FT. GW.
PRO	26	PHOENIX ROEBELENI	PYGMY DATE PALM	FG. SINGLE. CURVED TRUNKS, 6/9/12 FT. GW.
DCA	5	DYPSIS CABADAE	CABADA PALM	FG. MULTI. 14 FT. OA.
UNDERSTORY TREES & SHRUBS				
GL	48	GYMNANTHES LUCIDA	CRABWOOD	8 FT. HT.
CA	50	CRINUM AUGUSTUM 'QUEEN EMMA'	CRINUM LILY 'QUEEN EMMA'	7 GAL.
PV	10	PETREA VOLUBILIS	QUEEN'S WRATH	15 GAL. TRELLIS.
PW	30	PHILODENDRON 'WEEKS RED HYBRID'	SAME	7 GAL.
PR	103	PIMENTA RACEMOSA	BAY RUM	65 GAL. 14 FT. HT. OA. FULL TO BASE.
RK	48	RADERMACHERA 'KUNMING'	DWARF TREE JASMINE	15 GAL. 4 FT. HT.
RM	15	RHAPIS MULTIFIDA	FINGER PALM	25 GAL. 6-8 FT. HT.
SN	17	STRELITZIA NICOLAI	WHITE BIRD OF PARADISE	45 GAL. 10-12 FT. HT.
PL	135	PSYCHOTRIA LIGUSTRIFOLIA	BAHAMA WILD COFFEE	7 GAL. 3X3.
CI	25	CHRISOBALANUS ICACO 'HORIZONTAL'	COCOPLUM	7 GAL.
GROUNDCOVERS				
LM	1,390	LIRIOPE MUSCARI	LILYTURF	3 GAL. 18 IN. OC.

SECOND LEVEL PLANTING SCHEDULE

ABR.	QUANTITY	BOTANICAL NAME	COMMON NAME	SPECIFICATIONS
UNDERSTORY TREES & SHRUBS				
PB	7	PHILODENDRON BIPPINATIFIDUM	SAME	7 GAL.
FM	42	FICUS MICROCARPA 'GREEN ISLAND'	FICUS 'GREEN ISLAND'	3 GAL.
PL	5	POLYALTHIA LONGIFOLIA PENDULA	MAST TREE	25 GAL. 10 FT. HT.

TREE RELOCATION SCHEDULE

#	BOTANICAL NAME	COMMON NAME	DBH.	HT.	SPREAD	ACTION	NOTES
7	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
8	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
9	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	18'	12'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
11	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	8"	12'	8'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE

MITIGATION NOTES

THE PROPOSED LANDSCAPE PLAN MUST MITIGATE THE REMOVAL OF 5 PALMS AND 3 TREES WITH A TOTAL OF:

(6) TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM

(4) TREES 4 IN. DBH. X 8 FT. SPR. X 16 FT. HT.

NO MITIGATION REQUIRED FOR REMOVAL OF INVASIVE TREES.

THE PLANTING PLAN PROPOSES TO MITIGATE WITH THE FOLLOWING STRATEGY:

(6) CLUSIA ROSEA TREES MULTI-LEADER. X 8 FT. SPR. X 18 FT. HT. TREE-FORM
*(18 TREE CREDITS)

(2) COCCOLOBA UVIFERA TREES 4 IN. DBH. X 8 FT. SPR. HT. 16 FT. HT.
*(4 TREE CREDITS)

(2) COCCOLOBA DIVERSIFOLIA TREES 4 IN. DBH. X 8 FT. SPR. X 16 FT. HT.
*(4 TREE CREDITS)

TOTAL REMOVALS

- **5 PALMS** REMOVED
- **3 TREES** REMOVED
- **0 INVASIVE TREES** REMOVED


REFER TO SHEET L700 & L701 FOR MITIGATION TREES & PALMS SPECIES, SPECIFICATIONS, AND LAYOUT.



1447 cypress drive, 2
jupiter, fl 33469
561.402.9414
www.nielsenlandarch.com

THE SALTER GARDEN
6970 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (\$ TYLER NIELSEN - LA6667067)

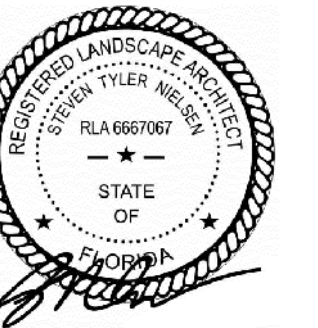

08.07.2024

PLANTING SCHEDULE & NOTES


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.08.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

L700

PLANT REFERENCE IMAGERY



CLUSIA ROSEA

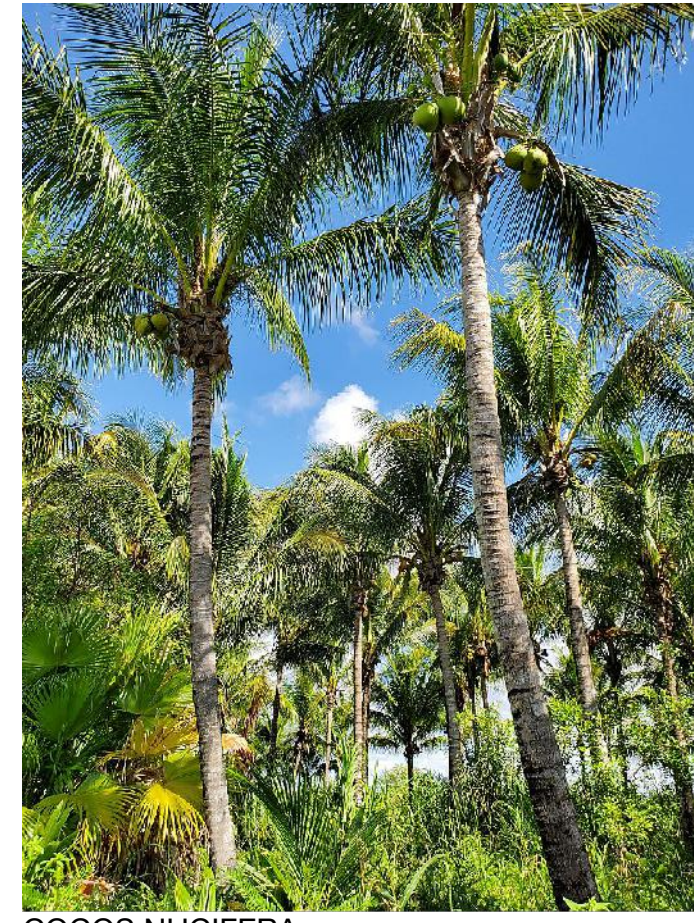

COCOS NUCIFERA



ROYSTONEA ELATA



CONOCARPUS ERECTUS



COPERNICIA BAILEYANA



PIMENTA RACEMOSA



LILYTURF



PHILODENDRON BIPPINATIFIDUM



CRINUM AUGUSTUM 'QUEEN EMMA'



GYMNANTHES LUCIDA



PETREA VOLUBILIS




PHILODENDRON 'BURLE MARX'



PHILODENDRON 'WEEKS RED HYBRID'



RADERMACHERA 'KUNMING'

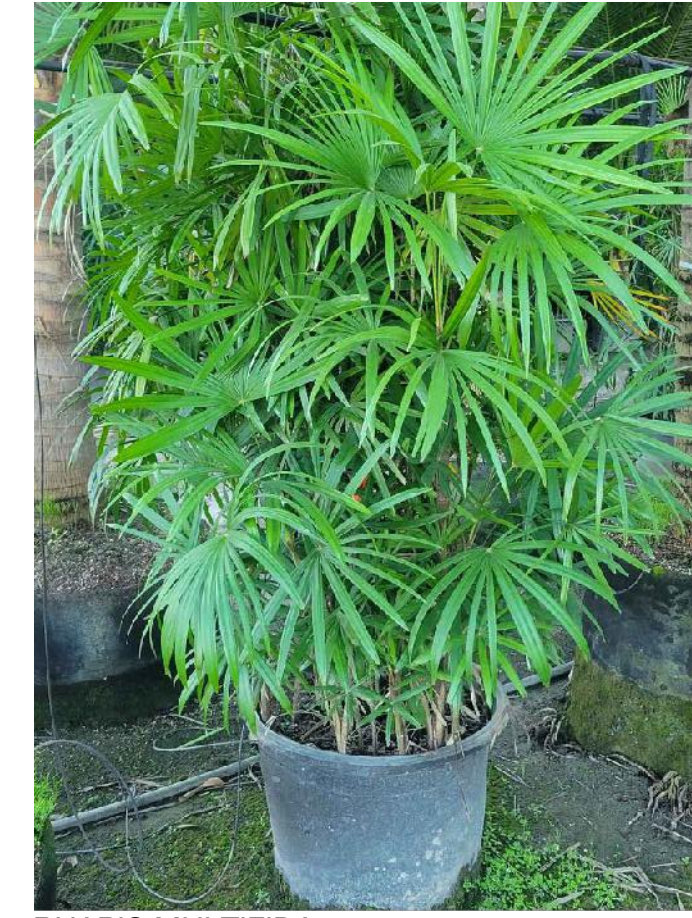

RHAPIS MULTIFIDA



FICUS MICROCARPA 'GREEN ISLAND'



STRELITZIA NICOLAI



PSYCHOTRIA LIGUSTRIFOLIA



PHOENIX ROEBELENI



DYPSIS CABADAЕ



CHRISOBALANUS ICACO 'HORIZONTAL'



COCCOLOBA UVIFERA



POLYALTHIA LONGIFOLIA PENDULA



COCCOLOBA DIVERSIFOLIA



MYRCIANTHES FRAGRANS




MICHELIA CHAMPACA ALBA



PIMENTA RACEMOSA


SEAL (S TYLER NIELSEN - LA6667067)

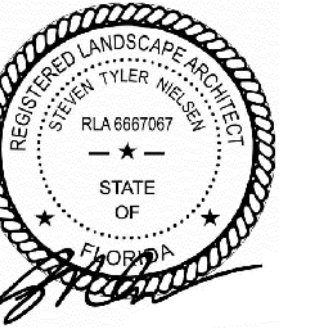


08.07.2024

PLANT REFERENCE IMAGERY

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

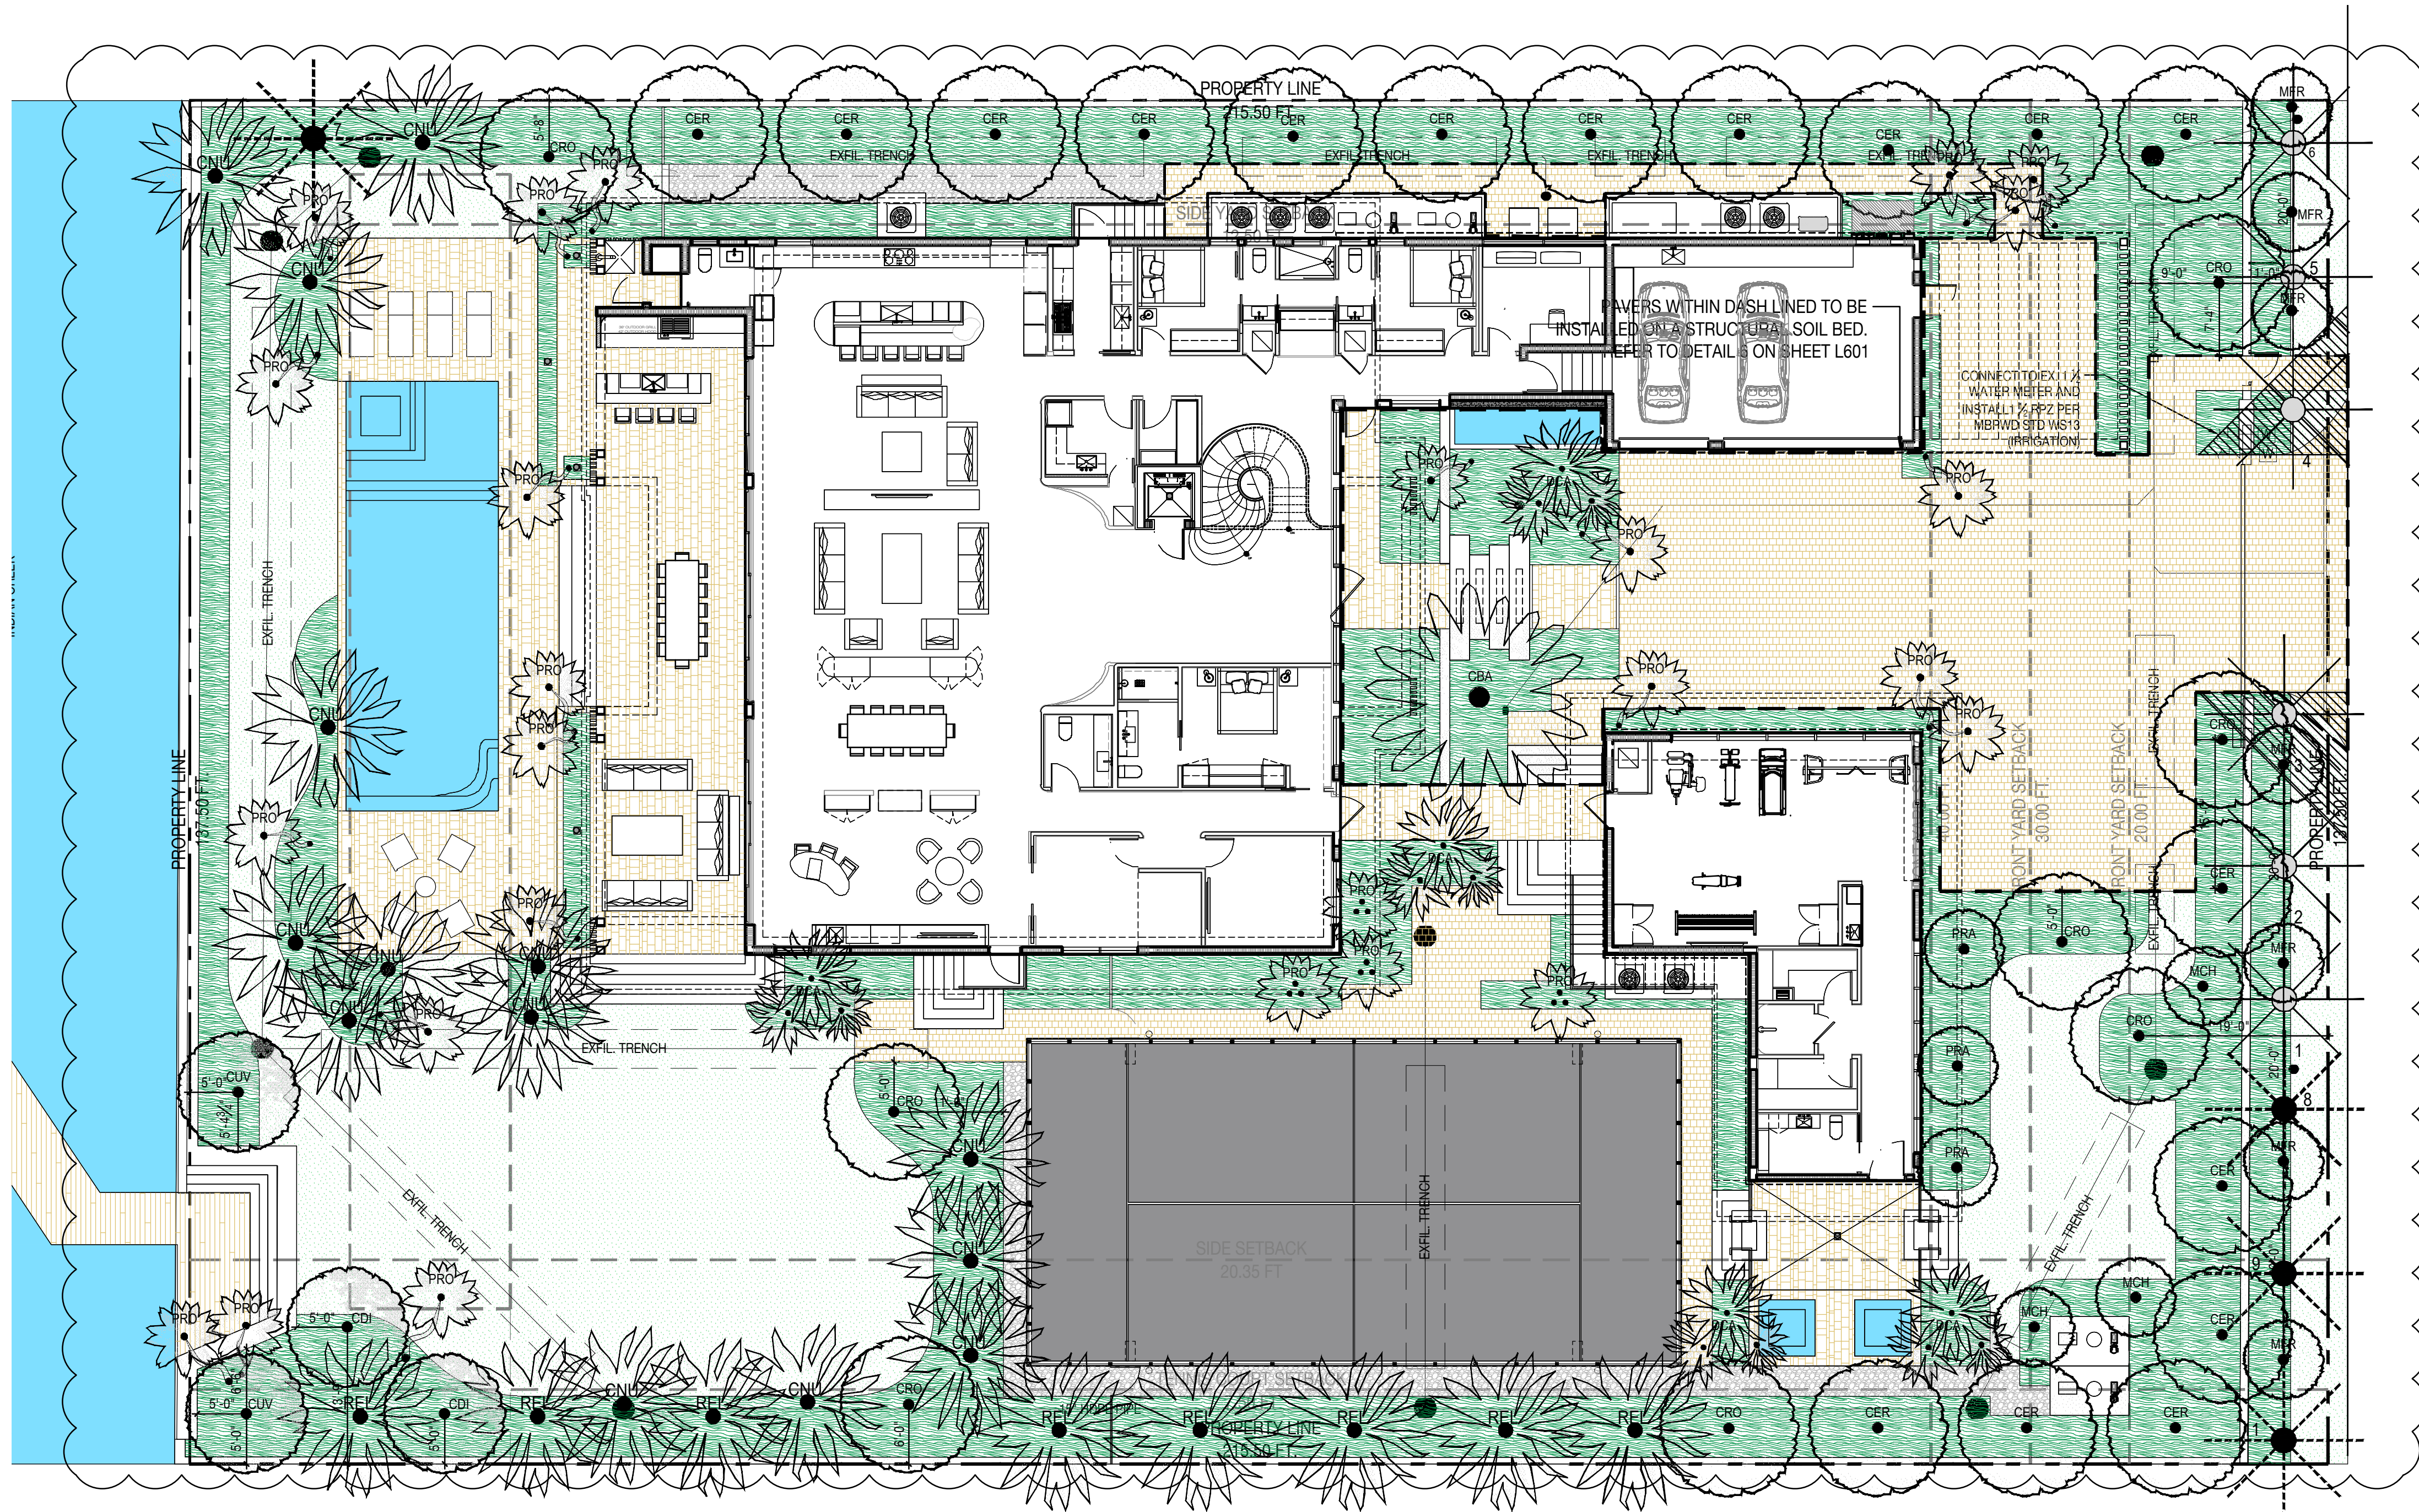

PLANTING LEGEND

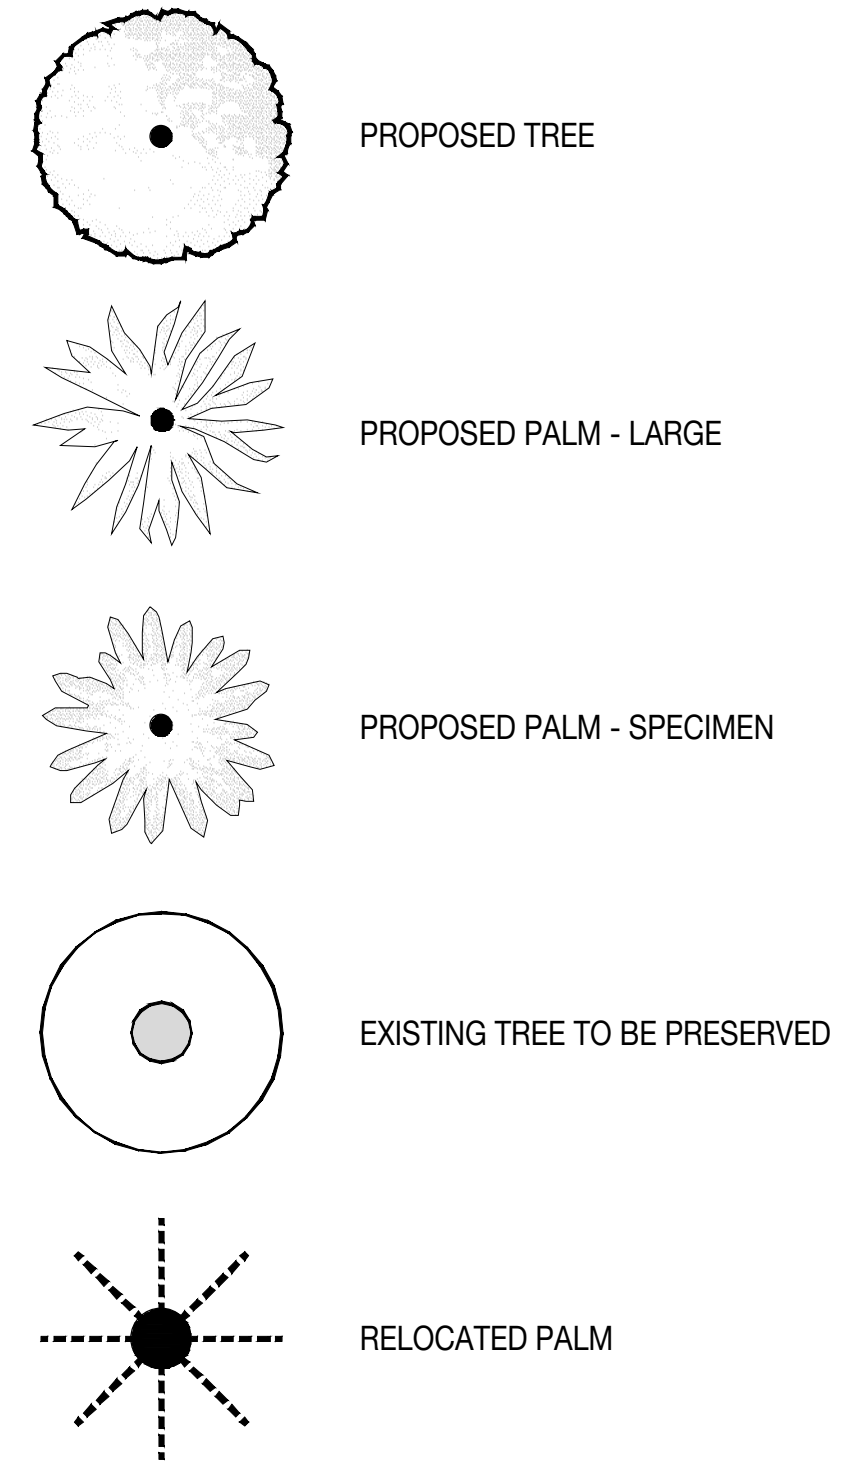


PLANTING SCHEDULE

ABR.	QUANTITY	BOTANICAL NAME	COMMON NAME
TREES			
CRO	8	CLUSIA ROSEA	PITCH APPLE
CER	17	CONOCARPUS ERECTUS	GREEN BUTTONWOOD
CUV	2	COCCOLOBA UVIFERA	SEA GRAPE
CDI	2	COCCOLOBA DIVERSIFOLIA	PIGEON PLUM
MFR	7	MYRCIANTHES FRAGRANS	SIMPSON'S STOPPER
PRA	3	PIMENTA RACEMOSA	BAY RUM
MCH	3	MICHELIA CHAMPACA ALBA	SAME
PALMS			
REL	8	ROYSTONEA ELATA	ROYAL PALM
CNU	14	COCOS NUCIFERA 'GREEN MALAYAN'	COCONUT PALM
CBA	1	COPERNICIA BAILEYANA	BAILEY PALM
PRO	26	PHOENIX ROEBELENI	PYGMY DATE PALM
DCA	5	DYPSIS CABADAE	CABADA PALM

TREE RELOCATION SCHEDULE

#	BOTANICAL NAME	COMMON NAME	DBH.	HT.	SPREAD	ACTION	NOTES
7	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
8	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	12"	24'	18'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
9	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	10"	18'	12'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE
11	PHOENIX SYLVESTRIS	SYLVESTER DATE PALM	8"	12'	8'	RELOCATE	LOCATION OF PLANT MATERIAL CONFLICTS WITH CONSTRUCTION ENVELOPE


SEAL (S TYLER NIELSEN - LA6667067)

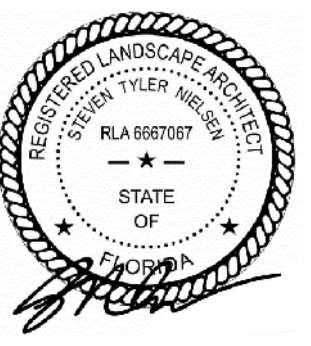

08.07.2024





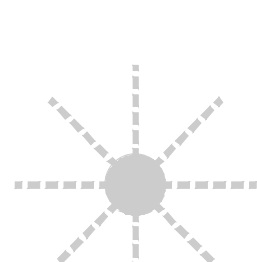
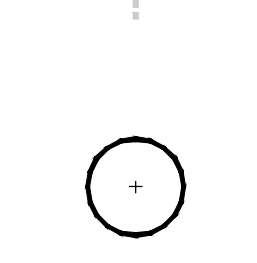
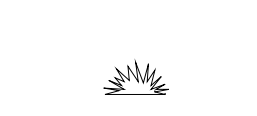
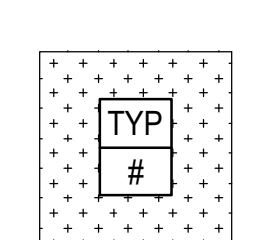
TREE & PALM PLANTING PLAN


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

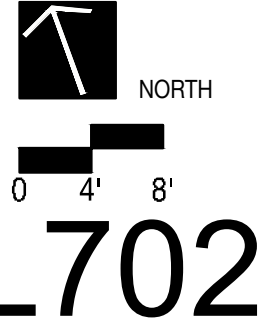

L702

PLANTING LEGEND

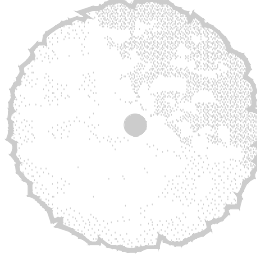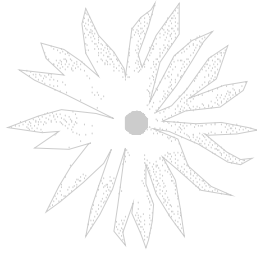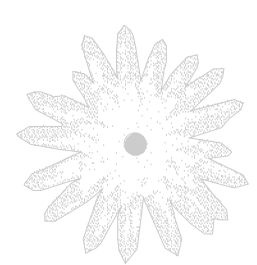-  PROPOSED TREE
-  PROPOSED PALM - LARGE
-  PROPOSED PALM - SPECIMEN
-  EXISTING TREE TO BE PRESERVED
-  RELOCATED PALM
-  PROPOSED SHRUB / ACCENT
-  PROPOSED VINE
-  PROPOSED GROUNDCOVER

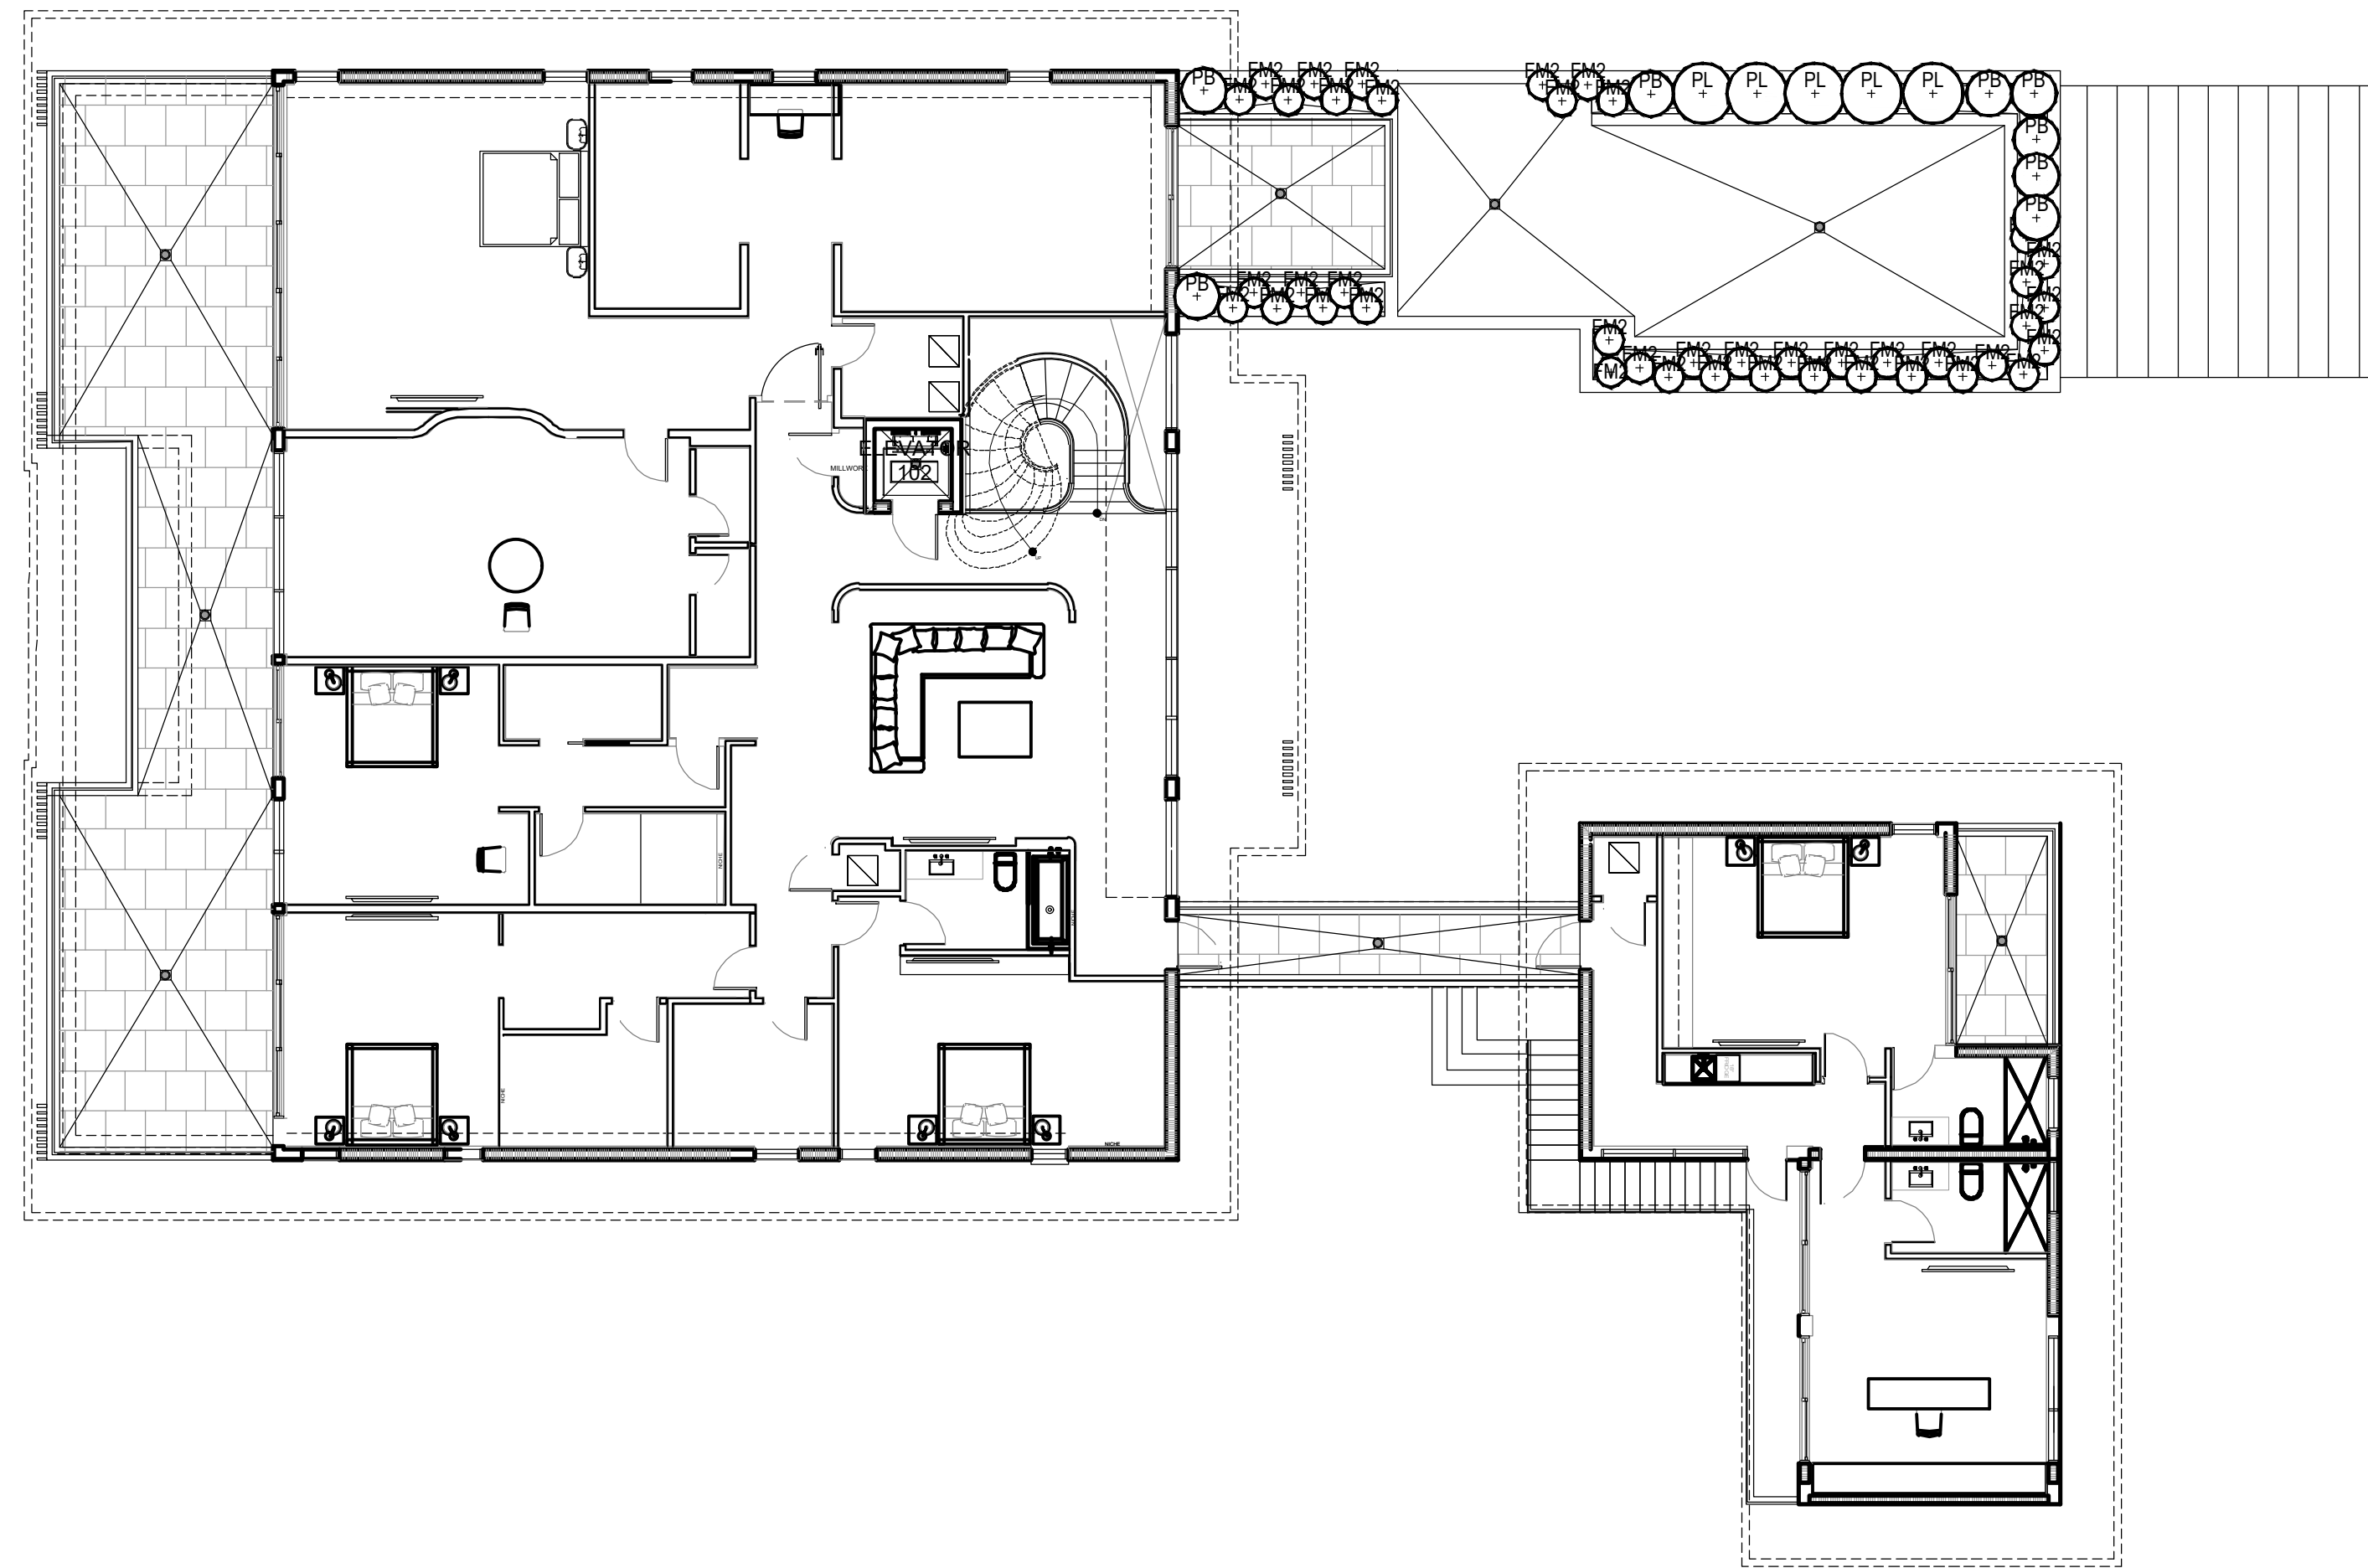


SECOND LEVEL PLANTING SCHEDULE

ABR.	QUANTITY	BOTANICAL NAME	COMMON NAME
UNDERSTORY TREES & SHRUBS			
PB	7	PHILODENDRON BIPPINATIFIDUM	SAME
FM	42	FICUS MICROCARPA 'GREEN ISLAND'	FICUS 'GREEN ISLAND'
PL	5	POLYALTHIA LONGIFOLIA PENDULA	MAST TREE

THE SALTER GARDEN

6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141


SEAL (S TYLER NIELSEN - LA6667067)

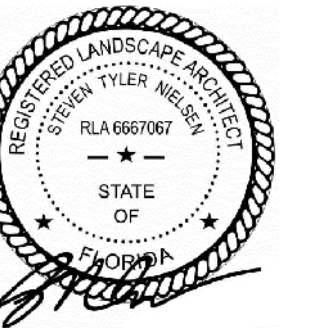


08.07.2024

SECOND LEVEL PLANTING PLAN


DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

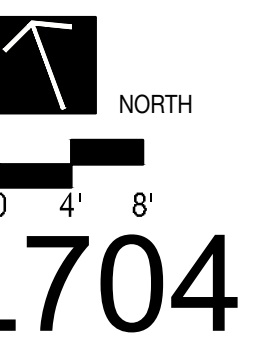


L704

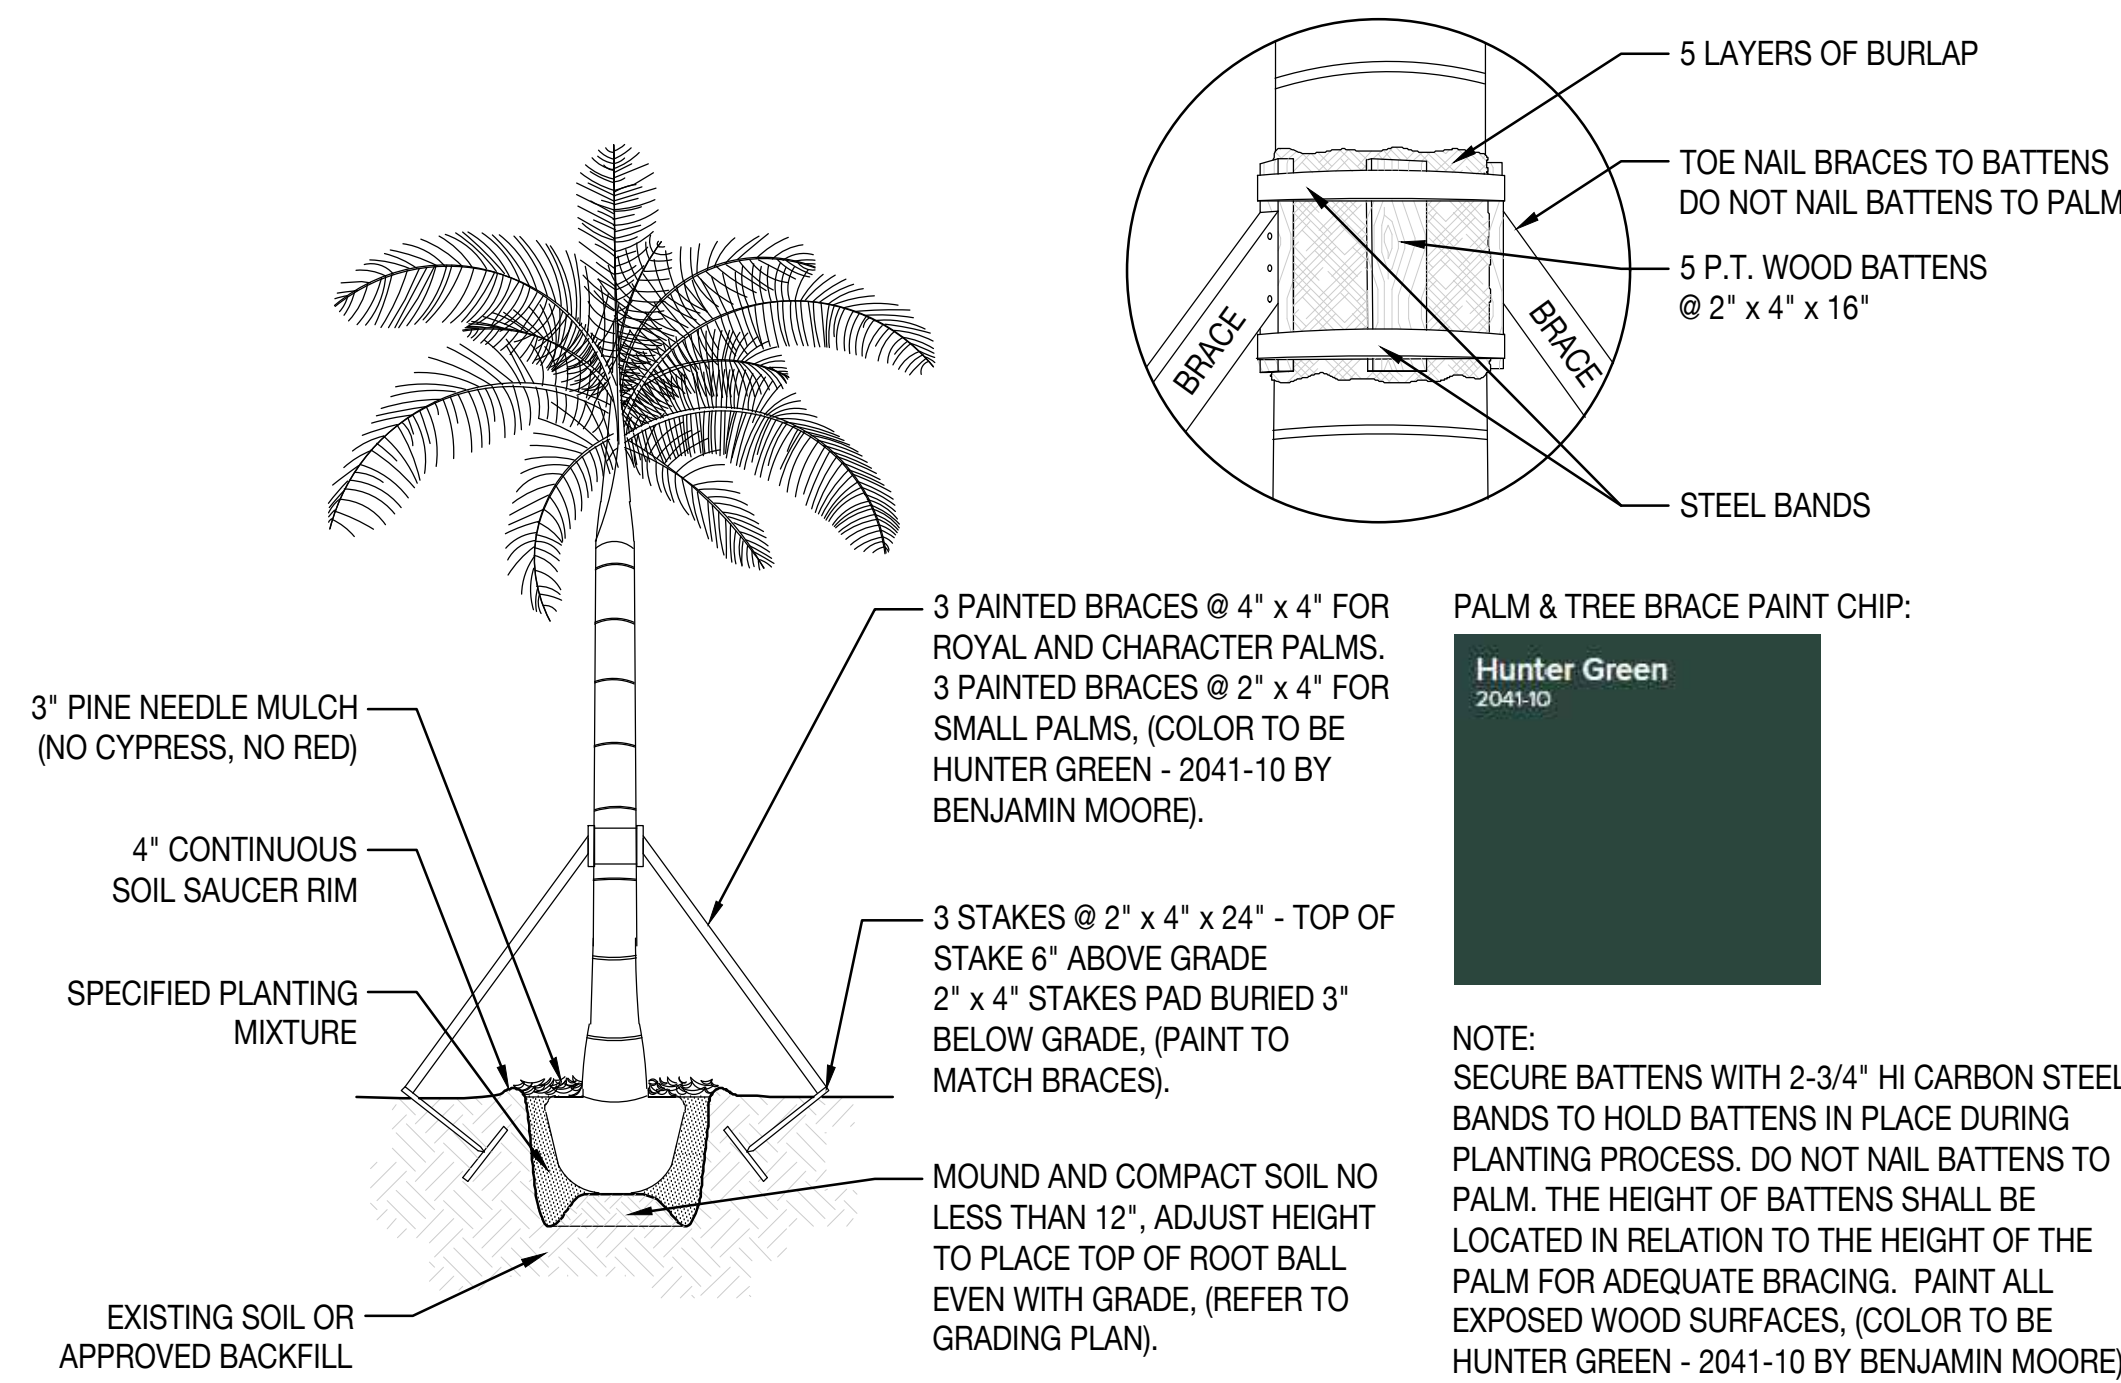


1 PALM PLANTING AND STAKING DETAIL
SCALE: 3/32" = 1'- 0"

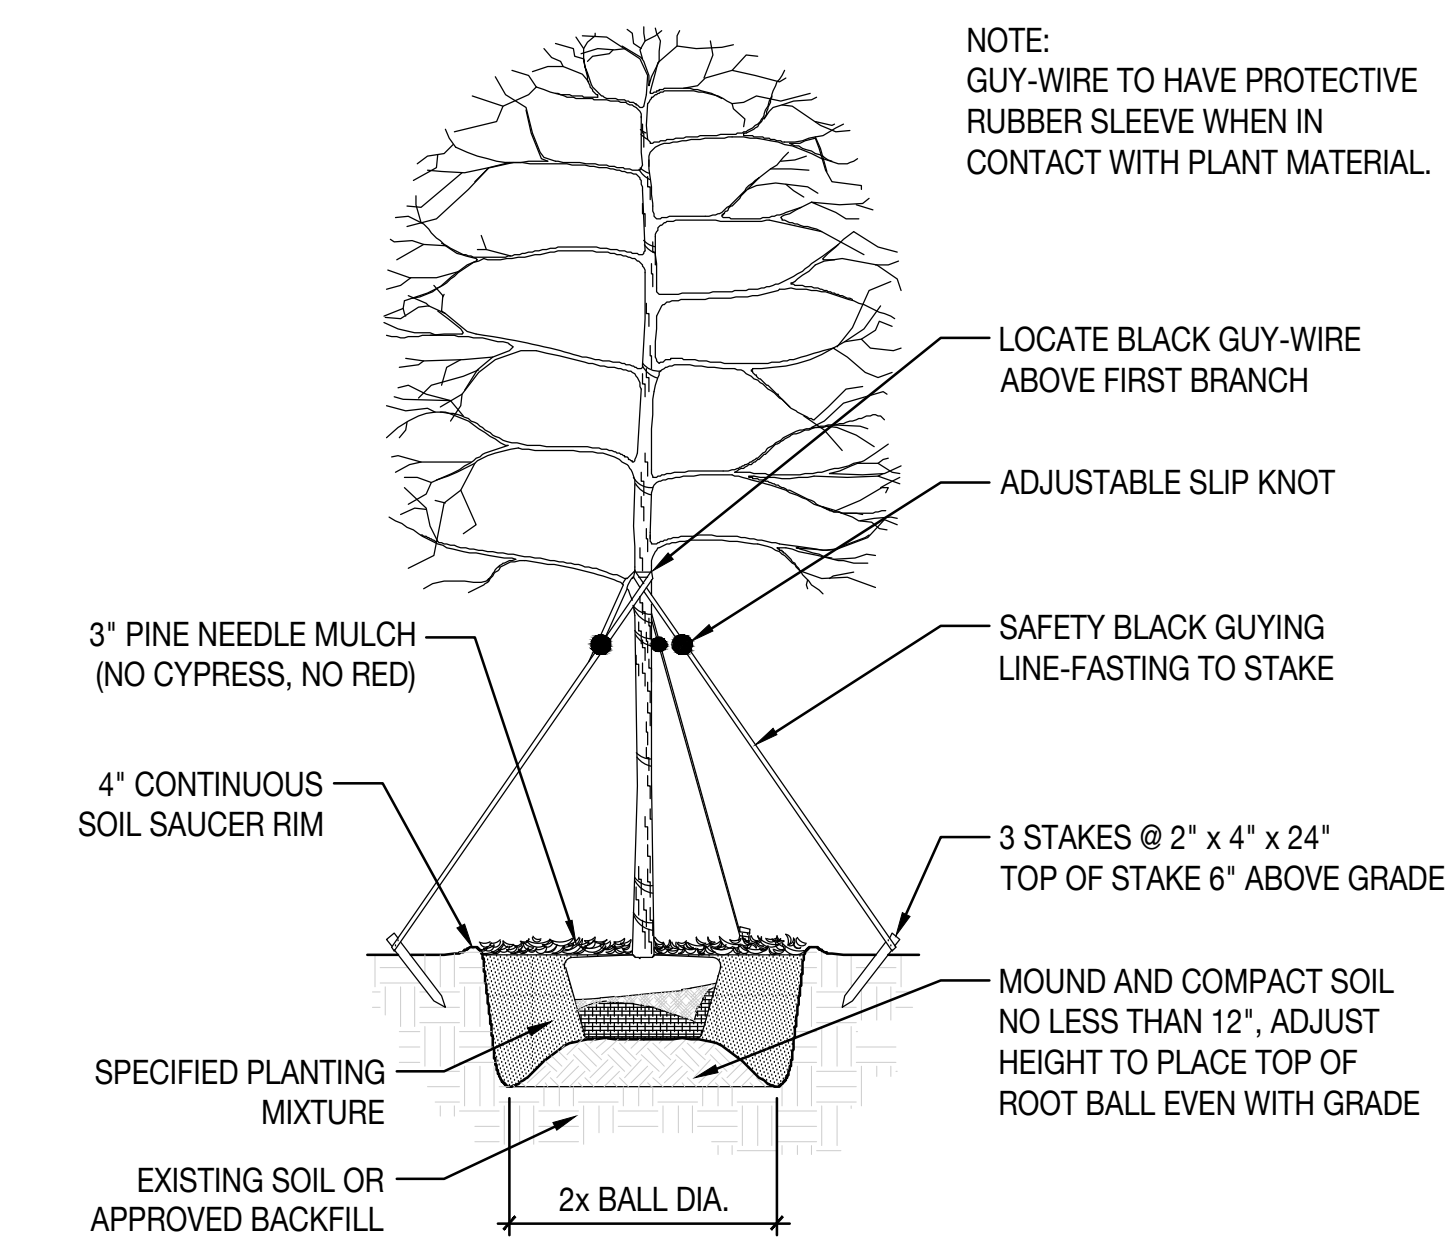


2 UNDERSTORY TREE PLANTING AND STAKING DETAIL
SCALE: 3/32" = 1'- 0"

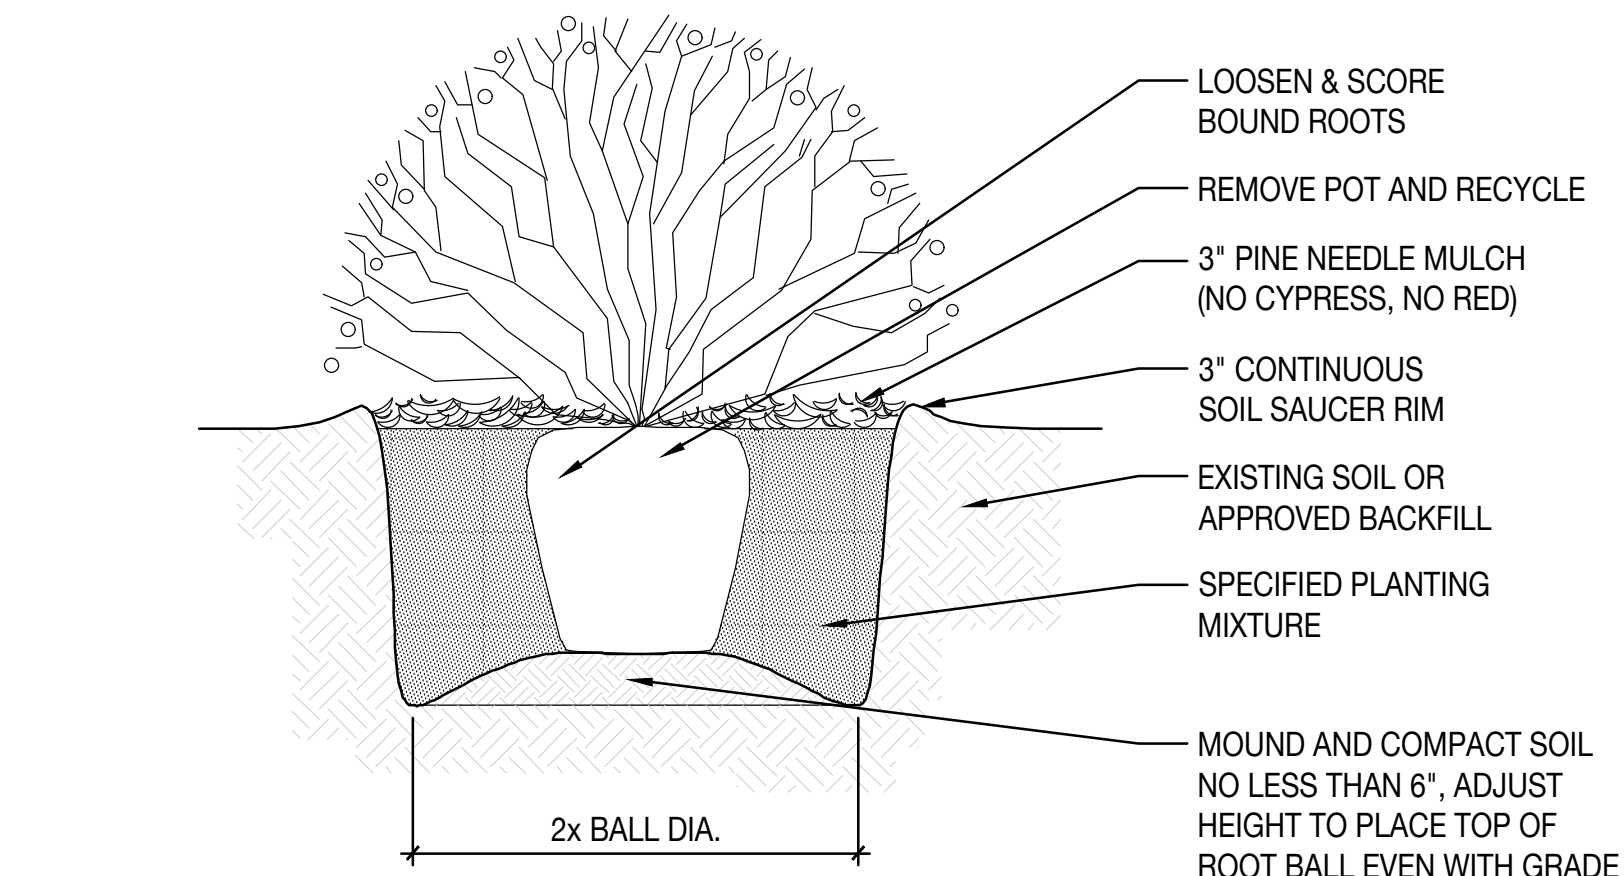


3 SHRUB PLANTING DETAIL
SCALE: 3/32" = 1'- 0"

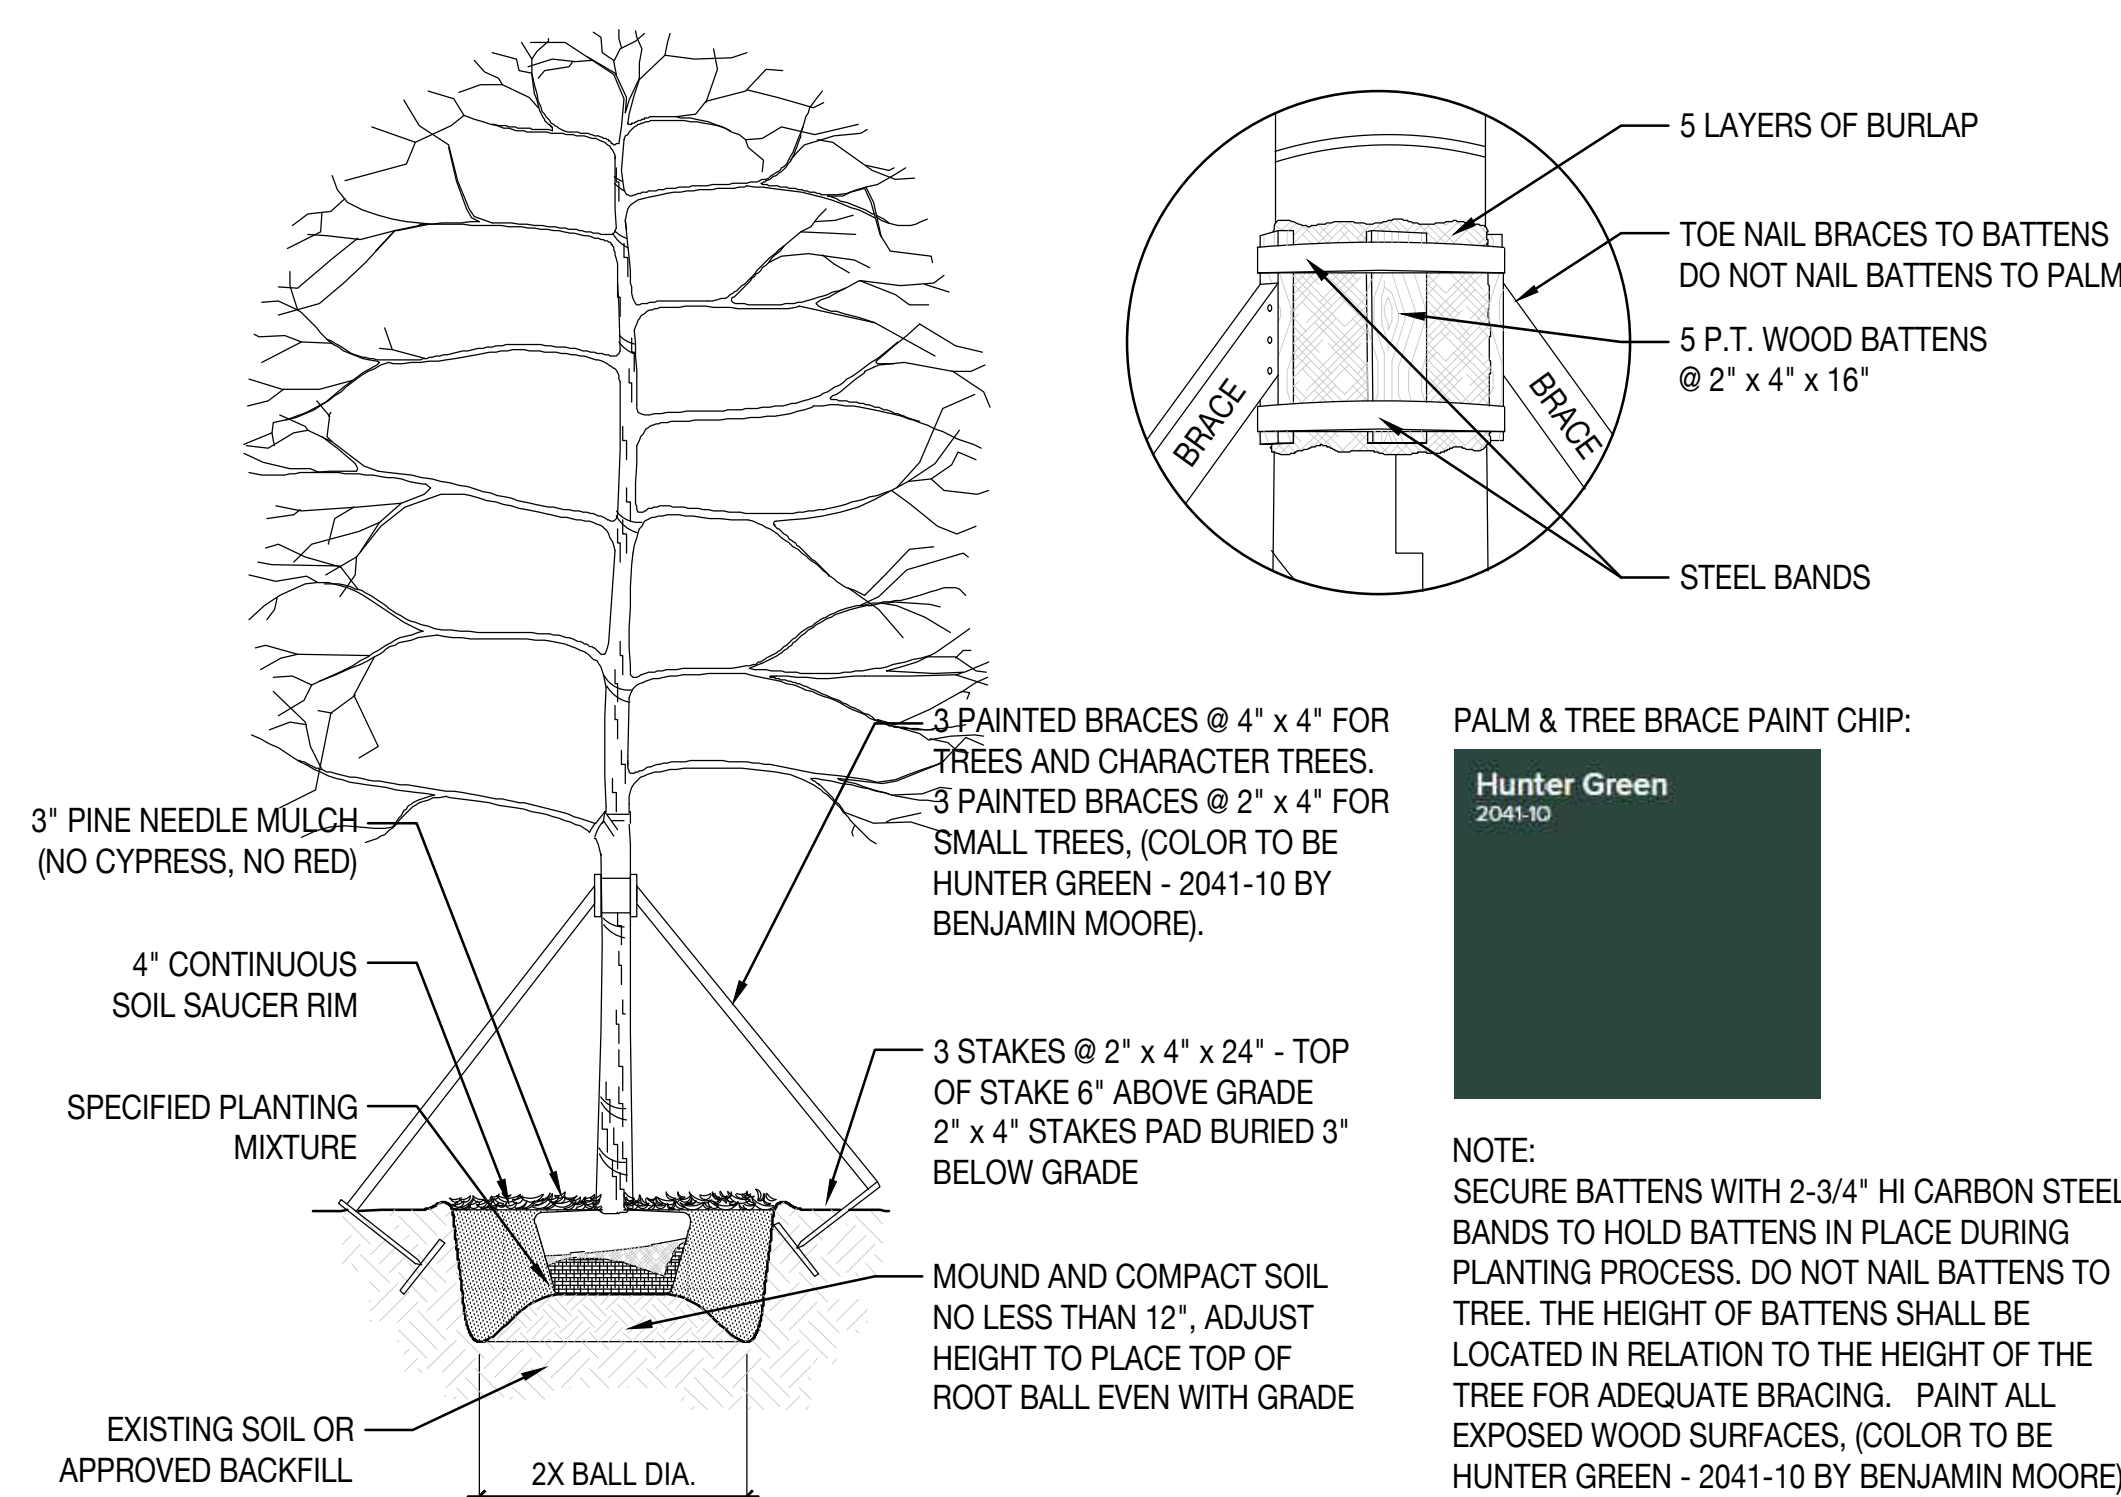


4 TREE PLANTING AND STAKING DETAIL
SCALE: 3/32" = 1'- 0"

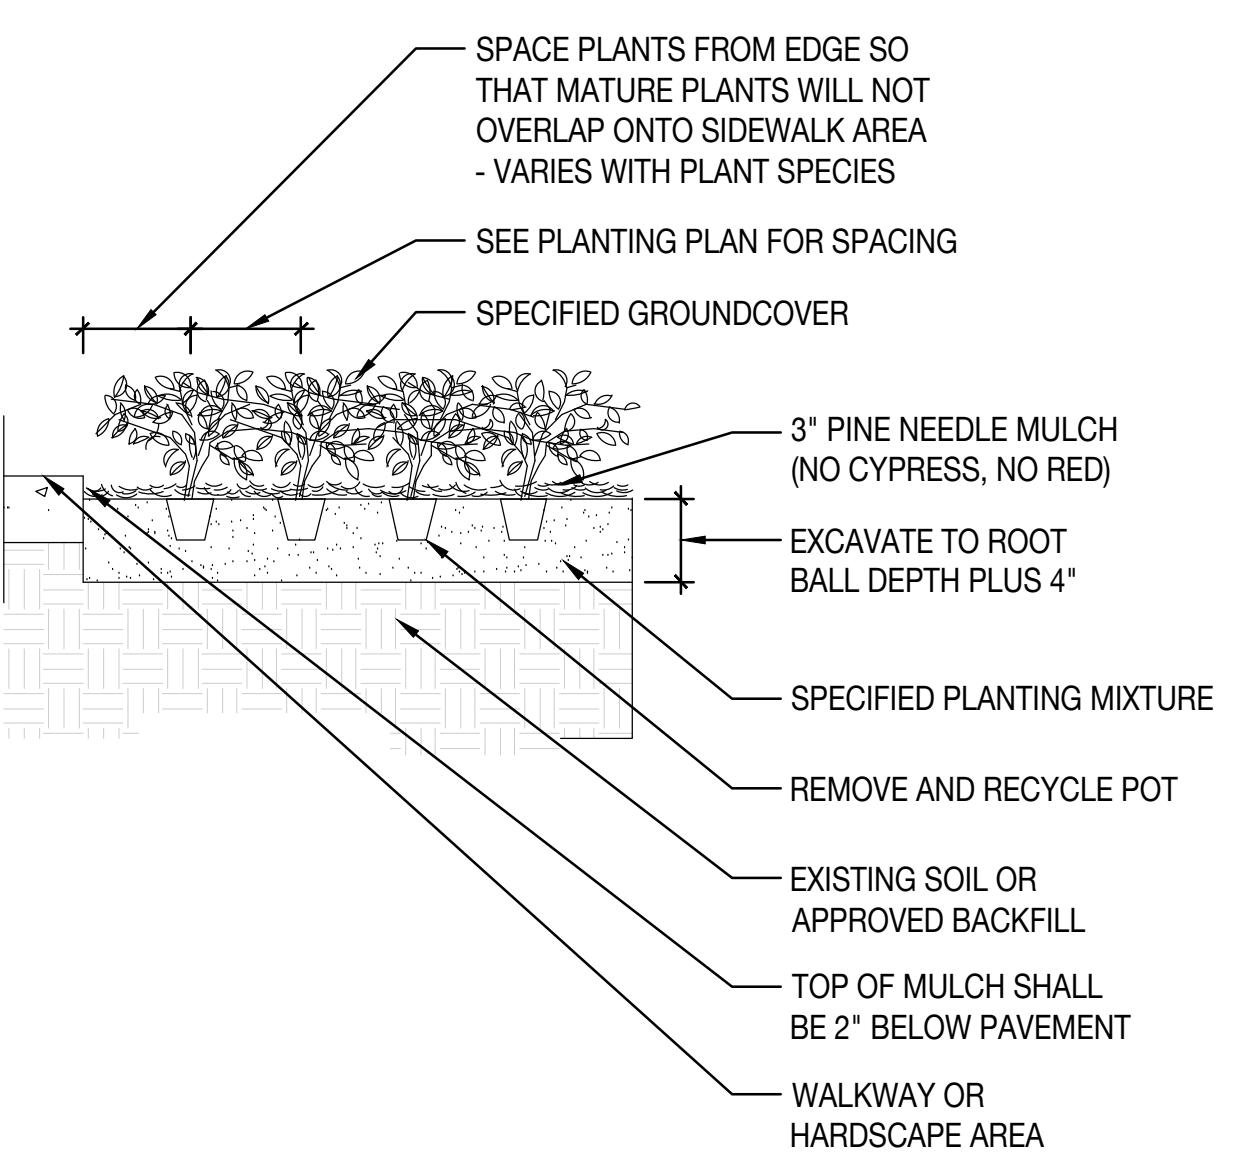

5 GROUND COVER PLANTING DETAIL
SCALE: 3/32" = 1'- 0"

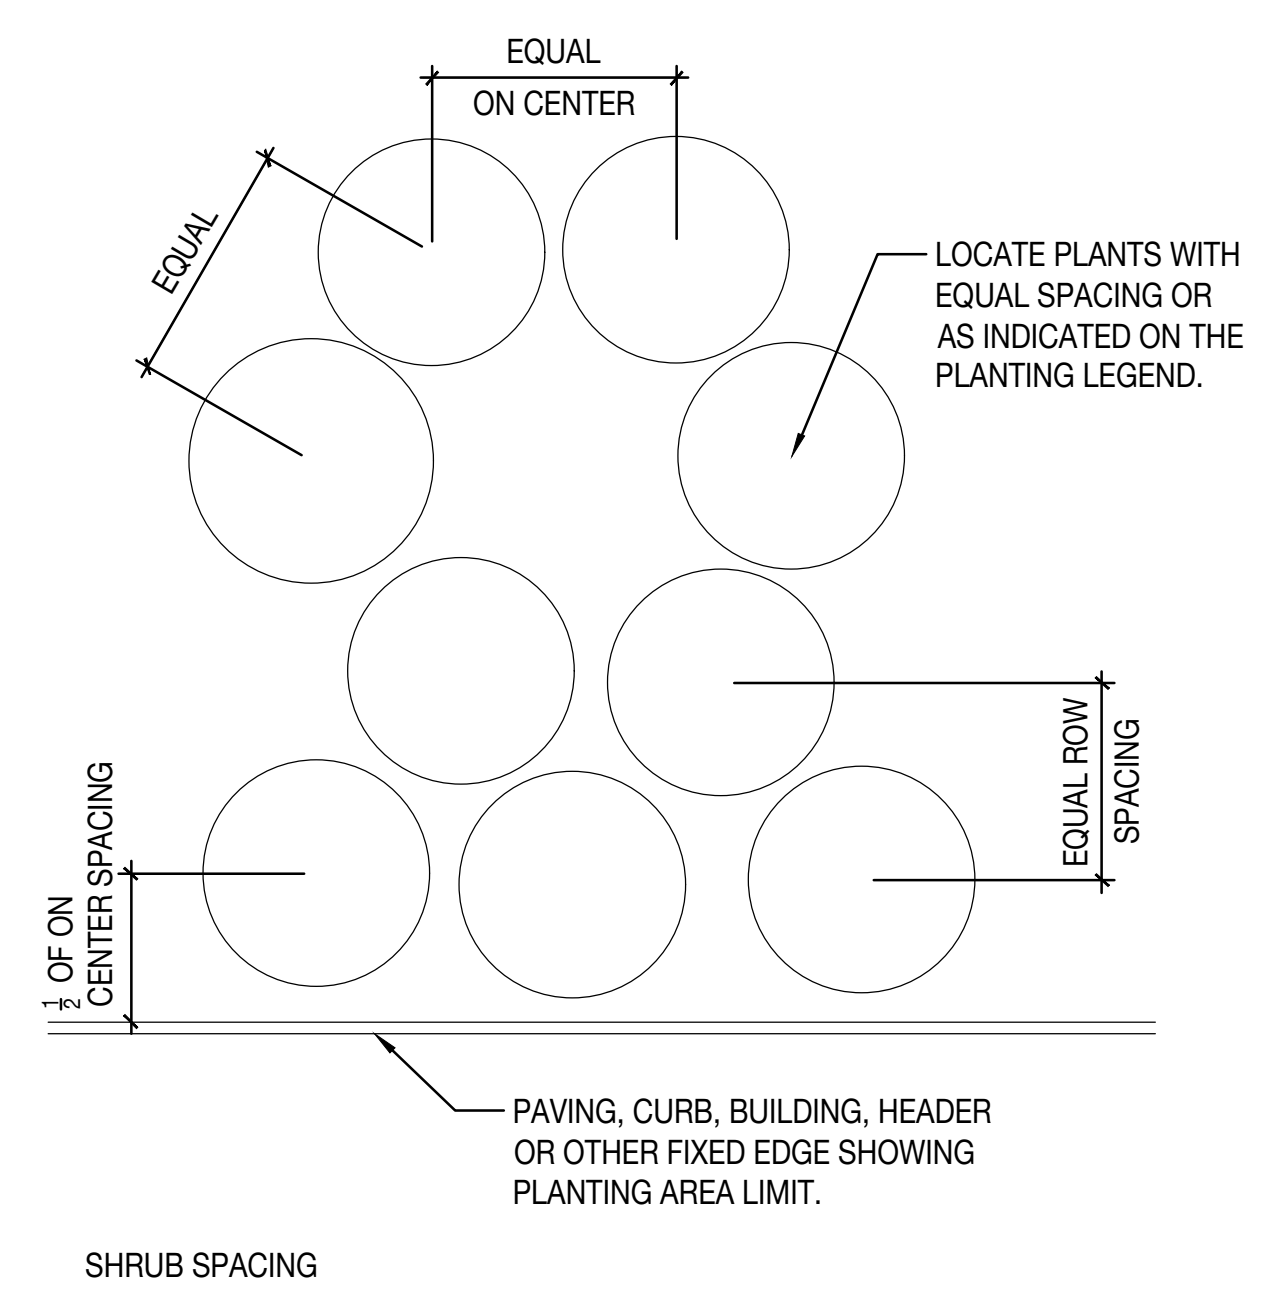

6 PLANT & SHRUB SPACING DETAIL
SCALE: 3/32" = 1'- 0"

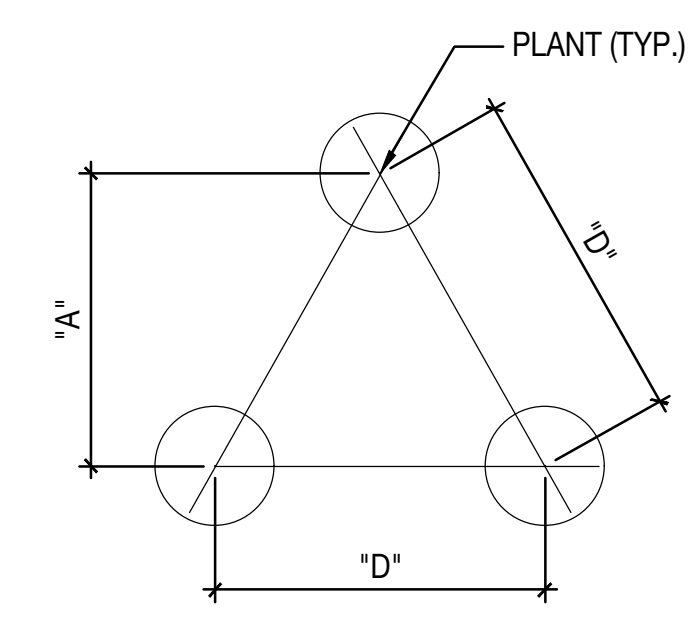


TRIANGULAR PLANT SPACING CHART FOR GROUNDCOVERS AND PERENNIALS

ROW	SPACING	
	"D"	"A"
18" O.C.	15" O.C.	
24" O.C.	21" O.C.	
36" O.C.	31" O.C.	

GROUNDCOVER & PERENNIAL SPACING

SEAL (S TYLER NIELSEN - LA6667067)

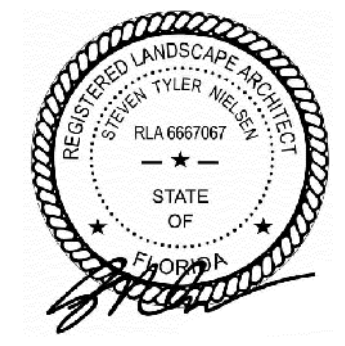

08.07.2024

PLANTING DETAILS

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
08.24.2022	100% CD SET
11.07.2022	REVISION 01
01.18.2023	REVISION 02
04.25.2023	REVISION 03
09.06.2023	REVISION 04
11.30.2023	REVISION 05
05.08.2024	COORDINATION
05.15.2024	DRB REVIEW
06.04.2024	PERMIT
06.17.2024	REVISION 06
08.07.2024	REVISION 07

SCALE AS NOTED:

IRRIGATION NOTES

- SOME PIPE LINES ARE DRAWN OFF SET FOR CLARITY. INSTALL ALL IRRIGATION LINES IN LANDSCAPED AREAS.
- REFER TO THE LANDSCAPE PLANS WHEN TRENCHING TO AVOID TREE ROOT BALLS TO INSTALL HEADS AT APPROPRIATE LOCATIONS.
- ADJUST ALL NOZZLES TO REDUCE OVERTHROW ON PAVING & WALLS. THROTTLE ALL IRRIGATION CONTROL VALVES AS REQUIRED TO PREVENT FOGGING. SET CONTROLLER RUN TIMES TO MATCH PLANT WATER NEEDS AND SOIL CONDITIONS.
- INSTALL RISERS 18" FROM WALLS OR BUILDINGS, AND 24" FROM PAVED SURFACES. PAINT ALL RISERS AND SUPPORTS FLAT BLACK.
- INSTALL POP-UP HEADS 18" FROM WALLS, 6" FROM WALKS, DECKS AND CURBS, 6 FEET FROM CURBLESS ROADS, AND 30" FROM THE END OF PARKING SPACES.
- SET TOP OF POP-UP HEAD CAPS 1" ABOVE FINISHED GRADE PRIOR TO SOD OR MULCH INSTALLATION.
- REFER TO UTILITY PLANS PRIOR TO TRENCHING. THE IRRIGATION INSTALLER SHALL BE RESPONSIBLE FOR THE REPAIR OF ANY DAMAGE TO UTILITIES CAUSED BY THEIR WORK DURING THE PROJECT.
- ALL WORK SHALL BE GUARANTEED FOR ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE AGAINST ALL DEFECTS IN EQUIPMENT AND WORKMANSHIP.
- ELECTRIC POWER SUPPLY FOR THE IRRIGATION CONTROLLER SHALL BE BROUGHT TO A JUNCTION BOX AT THE CONTROLLER LOCATION BY THE BUILDING ELECTRICAL CONTRACTOR. IRRIGATION INSTALLER TO PROVIDE ELECTRICAL PERMITS AND LICENSED ELECTRICIAN TO CONNECT THE IRRIGATION CONTROLLER EQUIPMENT TO THE POWER SUPPLY.
- IRRIGATION WATER CONNECTIONS AND SYSTEM CONSTRUCTION SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL CODES FOR IRRIGATION INSTALLATION AND CONNECTIONS TO THE WATER SUPPLY.
- IRRIGATION INSTALLER TO ACQUIRE ALL PERMITS AND UTILIZE ALL SAFETY PRECAUTIONS REQUIRED TO WORK IN ROW OF ROADWAY.
- SIXTY (60) PSI MINIMUM STATIC WATER PRESSURE IS REQUIRED FOR THE EFFICIENT OPERATION OF THE IRRIGATION SYSTEM AS DESIGNED. VERIFY THE MINIMUM STATIC WATER PRESSURE IS AVAILABLE AT THE PROJECT SITE PRIOR TO BEGINNING THE IRRIGATION INSTALLATION. NOTIFY THE LANDSCAPE ARCHITECT IN WRITING IF THE MINIMUM STATIC WATER PRESSURE OR WATER VOLUME IS NOT AVAILABLE.
- AT THE END OF PARKING SPACES PLACE HEADS IN LINE WITH PARKING STRIPES OR 2.5 FEET FROM BACK OF CURB. (TYPICAL)
- PRIOR TO STARTING THE WORKS INSPECT THE SITE AND LOCATE ALL EXISTING IRRIGATION PIPES, WIRES AND EQUIPMENT. PROVIDE LABOR AND MATERIALS TO REPAIR ANY DAMAGED EXISTING IRRIGATION. PROVIDE "LIFELINE" PIPES AND WIRES TO KEEP ADJACENT IRRIGATION ZONES OPERATIONAL THROUGHOUT THE WORKS.
- THE IRRIGATION MAINLINE IS DRAWN OFFSET FOR GRAPHIC CLARITY. DO NOT SCALE THE MAINLINE FROM THE DRAWING FOR INSTALLATION. LAYOUT THE IRRIGATION MAINLINE ROUTE IN THE FIELD TO AVOID PROPOSED AND EXISTING TREE ROOT ZONES AND UTILITIES.

IRRIGATION LEGEND

- IRRIGATION WATER TAP AND WATER METER. SIZE INDICATED ON PLAN. PROVIDED BY THE SITE UTILITY CONTRACTOR, PER LOCAL CODES.
- REDUCED PRESSURE BACKFLOW PREVENTER. PROVIDED BY IRRIGATION INSTALLER, PER LOCAL CODES. WATTS 909, OR EQUAL.
- IRRIGATION CONTROLLER WITH RAIN SWITCH. NUMBER OF STATIONS INDICATED ON PLAN. 120 VOLT, 1.0 AMP. ELECTRIC CIRCUIT FROM NEAREST ELECTRICAL PANEL, BY THE BUILDING CONTRACTOR. PROVIDE CONTROLLER GROUNDING WITH 15' #6 BARE COPPER WIRE, 5/8" X 6' COPPER CLAD GROUND ROD AND ACORN CLAMP. HUNTER ICG2 SERIES + SOLAR SYNC. RAINBIRD ESP-LXME MODULAR SERIES + RSD RAIN SWITCH.
- CONTROL VALVE. PLASTIC BODY WITH FLOW CONTROL + VALVE ID TAG. MOUNT IN 15" RECTANGULAR VALVE BOX. SIZE INDICATED ON PLAN. PROVIDE UF 14AWG COPPER CONTROL WIRE TO ALL VALVES. HUNTER IGV VALVE SERIES, OR EQUAL. RAINBIRD PEB VALVE SERIES, OR EQUAL.
- IRRIGATION CONTROL VALVE TAG. INDICATES VALVE LOCATION, STATION NUMBER, SIZE AND ZONE FLOW RATE.
- IRRIGATION ISOLATION VALVE. SIZE SAME SIZE AS PIPE. MOUNT IN 19" RECTANGULAR VALVE BOX WITH 8" NDS DRAIN PIPE EXTENSION AS NEEDED. 2.5" AND SMALLER - BRONZE THREAD ON TYPE WITH WHEEL HANDLE.
- PVC MAIN LINE PIPE. CLASS 200, PVC. INSTALL 18" DEEP. 2.5" AND SMALLER, SOLVENT WELD PVC PIPE AND FITTINGS.
- PVC LATERAL LINE PIPE. INSTALL 12" DEEP. 3/4" AND LARGER, CLASS 200, PVC. 1/2" PIPE SIZE, CLASS 315, PVC. 2.5" AND SMALLER, SOLVENT WELD PVC PIPE AND FITTINGS.
- PVC SLEEVE PIPE. CLASS 200, PVC. SOLVENT WELD PVC PIPE AND FITTINGS.
- DRIP IRRIGATION VALVE, FILTER AND REGULATOR ASSEMBLY. 2-5 GPM (3/4") - RAIN BIRD LOW FLOW CONTROL ZONE KIT (XCZ-075-PRF) 3-15 GPM (1") - RAIN BIRD MEDIUM CONTROL ZONE KIT (XCZ-PRB-100-COM) 15-40 GPM (1.5") - RAIN BIRD CONTROL ZONE KIT (XCZ-PRB-150-COM) 40-60 GPM (1.5") - RAIN BIRD INLINE CONTROL ZONE KIT (XCZ-150-LCDR)
- DRIP EMITTER TUBING - .9 GPH 12" EMITTER SPACING, AND 18" ROW SPACING. PVC PIPE SUPPLY AND EXHAUST HEADERS WITH AIR RELEASE VALVES, AND AUTO FLUSH VALVES IN VALVE BOXES PER HIGH, LOW, AND END POINTS OF THE TUBING. PROVIDE A 12" POP-UP SPRAY HEAD WITH THE NOZZLE SHUT OFF AS A SYSTEM OPERATION INDICATOR. USE PVC PIPE TO, AND BETWEEN, EACH PLANTING AREA. NETAFIM UNI-TECHLINE-CNL - 1 GPH - 12" OC, OR EQUAL.
- DENOTES TREE IN THIS AREA. REFER TO TREE DRIP COIL DETAIL.
- 1" PVC ELECTRICAL CONDUIT WITH SWEEP ELLS AND PULL BOXES EVERY 200 FEET AND AT CHANGES IN DIRECTION FOR VALVE CONTROL WIRES INSTALLED OUTSIDE THE NEW MAINLINE TRENCH.

SPRAY BODIES


RAINBIRD 1800-PRS PRESSURE REGULATED SERIES SPRAY BODIES & ADAPTERS
POLY PIPE AND INSERT FITTING SWING JOINTS
PROVIDE U-SERIES SPRAY NOZZLES PER PLAN
HE-VAN SERIES NOZZLES FOR "Z" SERIES NOZZLE DESIGNATIONS

- 6" POP-UP TURF SPRAY BODY
- 12" POP-UP SHRUB SPRAY BODY

LETTER	GPM AT 30 PSI	RADIUS	PATTERN
A	0.92	15'	QUARTER
B	1.30	15'	ONE THIRD
C	1.85	15'	HALF
D	2.48	15'	TWO THIRD
E	2.92	15'	THREE QTR.
F	3.70	15'	FULL
G	0.65	12'	QUARTER
H	0.90	12'	ONE THIRD
J	1.30	12'	HALF
K	1.75	12'	TWO THIRD
L	2.00	12'	THREE QTR.
M	2.60	12'	FULL
N	0.39	10'	QUARTER
P	0.57	10'	ONE THIRD
R	0.79	10'	HALF
Q	1.58	10'	FULL
U	0.61	4' X 15'	END STRIP
UI	0.5	4' X 15'	LEFT CORNER STRIP
Ur	0.5	4' X 15'	RIGHT CORNER STRIP
V	1.21	4' X 30'	SIDE STRIP
W	1.2	4' X 30'	CENTER STRIP
Y	0.5	2' X 4'	SQUARE PATTERN
Z1	VARIES	10'	10' ADJUSTABLE ARC
Z2	VARIES	12'	12' ADJUSTABLE ARC
Z	VARIES	15'	15' ADJUSTABLE ARC
X	0.5	1'	FLOOD BUBBLER
O	1.0	5'	STREAM BUBBLER
1	0.26	8'	QUARTER
2	0.32	8'	ONE THIRD
3	0.52	8'	HALF
4	1.05	8'	FULL
5	.1	5'	QUARTER
6	.2	5'	ONE THIRD
7	.2	5'	HALF
8	.38	5'	FULL


TREE IRRIGATION

- 0.25 GPM TREE BUBBLERS ON FLEX PE PIPE
- RAIN BIRD 1401 PRESSURE REGULATED BUBBLERS

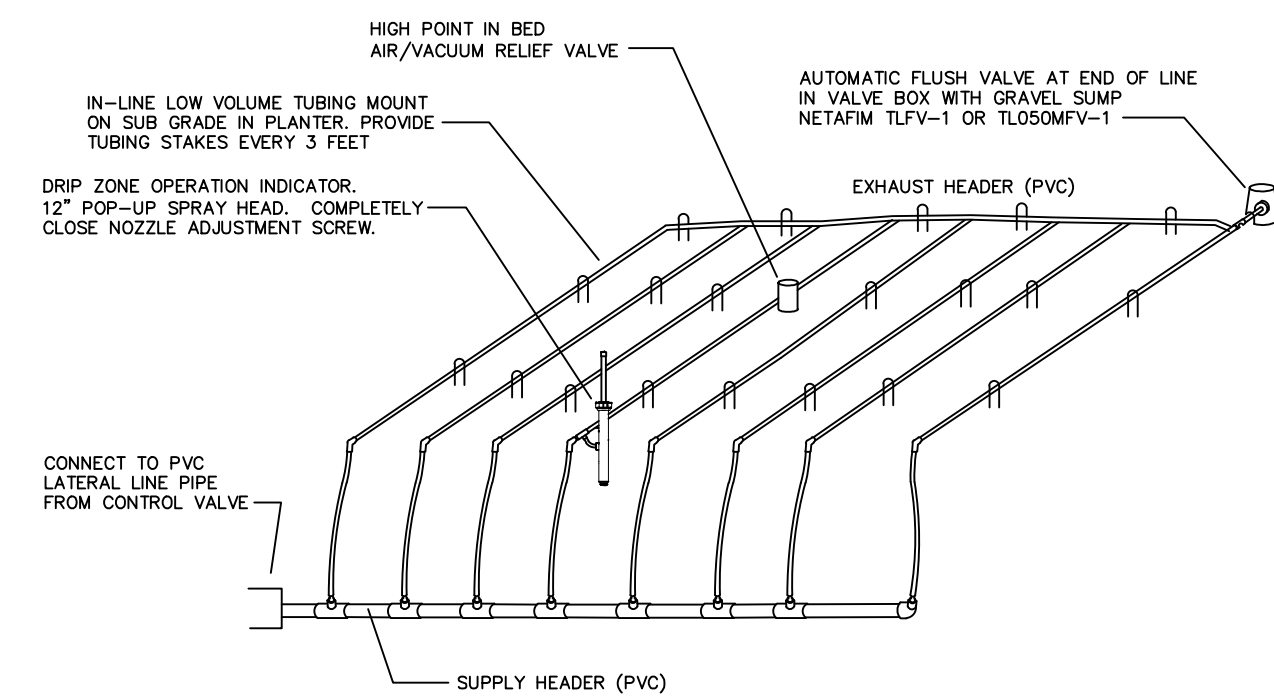


DRIP IRRIGATION LINES IN PLANTERS

NOT TO SCALE

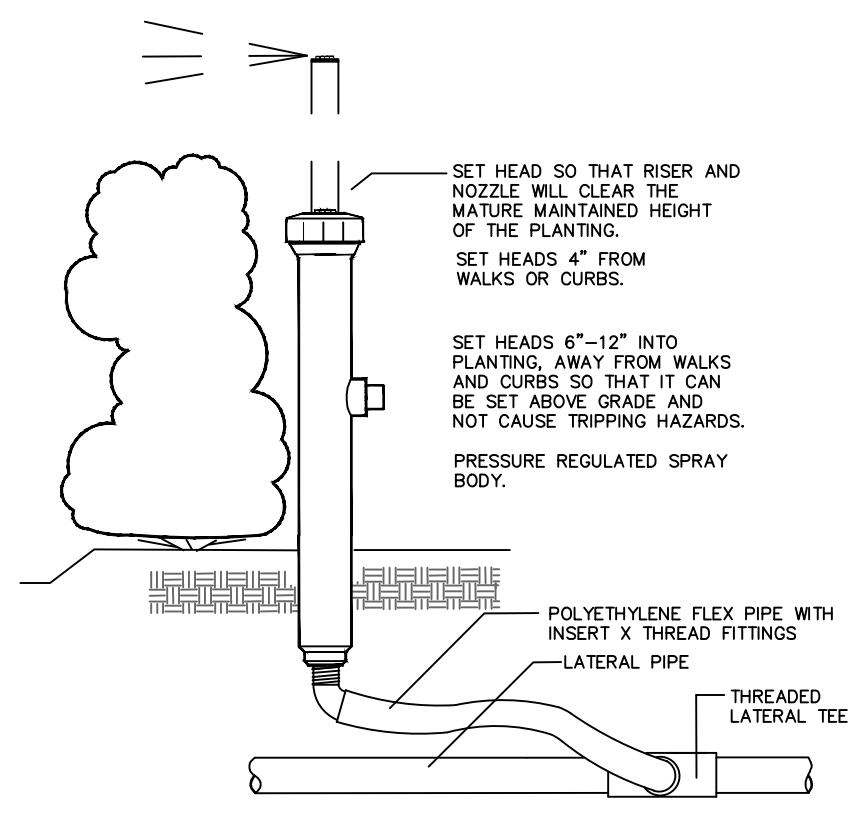


SPRAY HEAD IN SHRUB BED

NOT TO SCALE

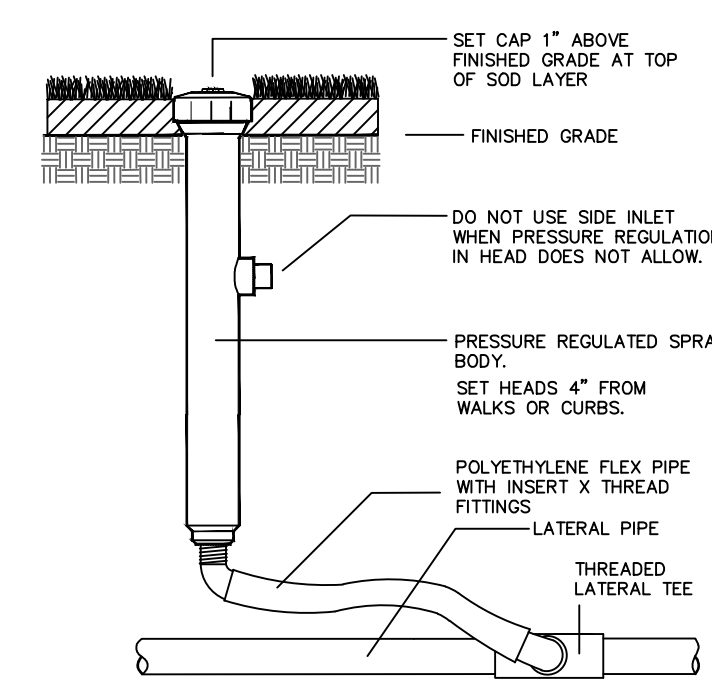


POP UP SPRAY BODY IN TURF

NOT TO SCALE

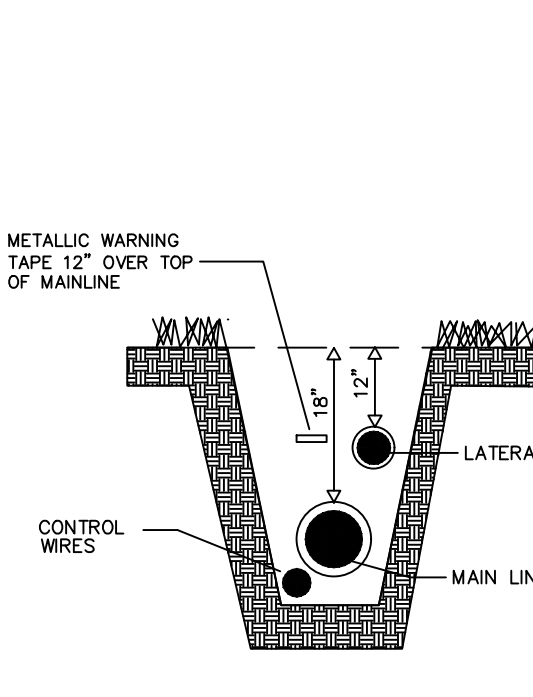


TYPICAL TRENCHING

NOT TO SCALE

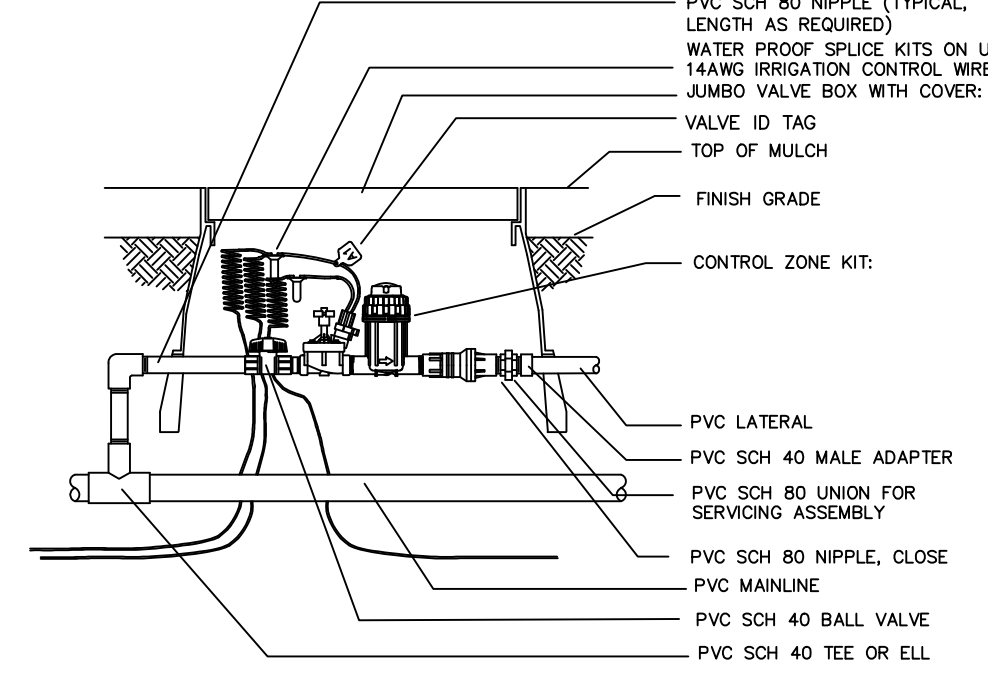


1" CONTROL ZONE KIT

NOT TO SCALE

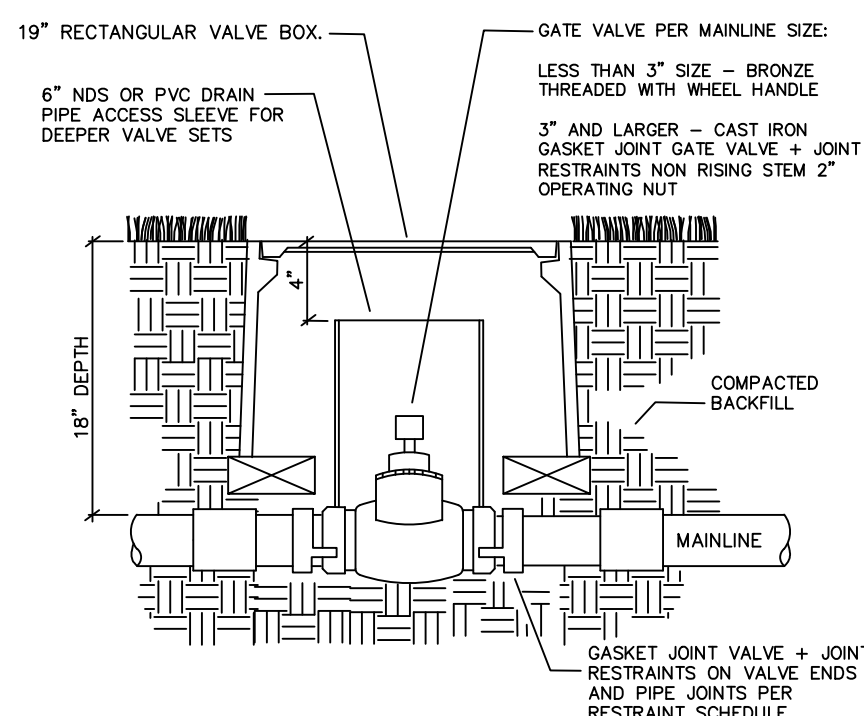


GATE VALVE

NOT TO SCALE

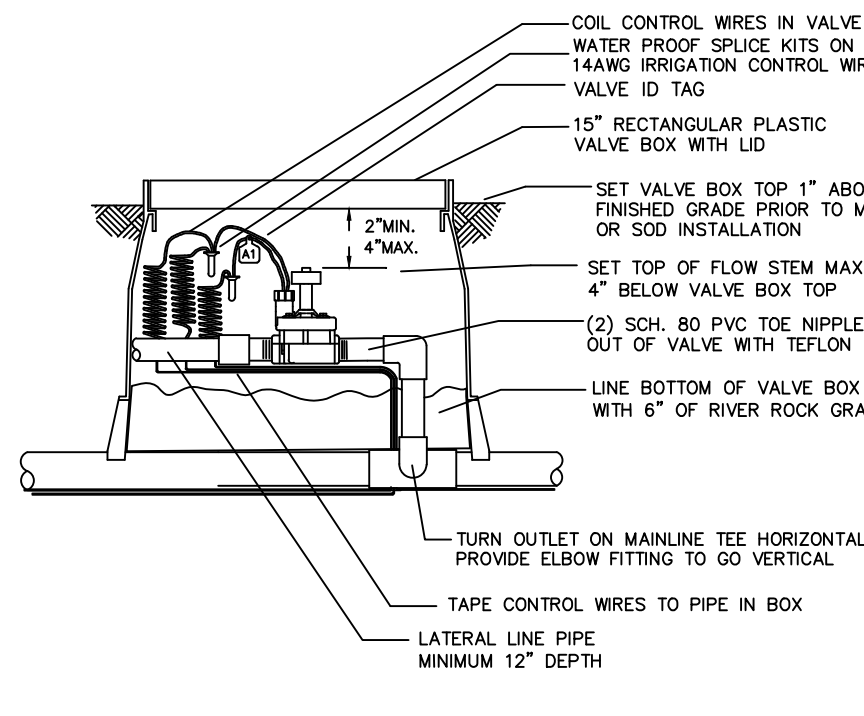


SOLENOID CONTROL VALVE

NOT TO SCALE

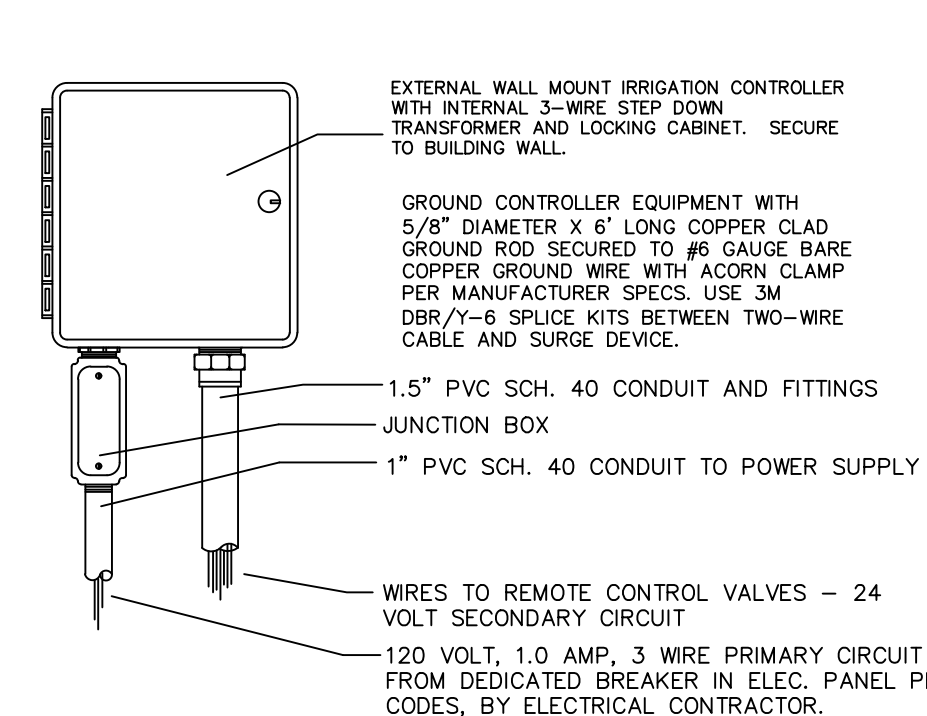


WALL MOUNTED CONTROLLER

NOT TO SCALE

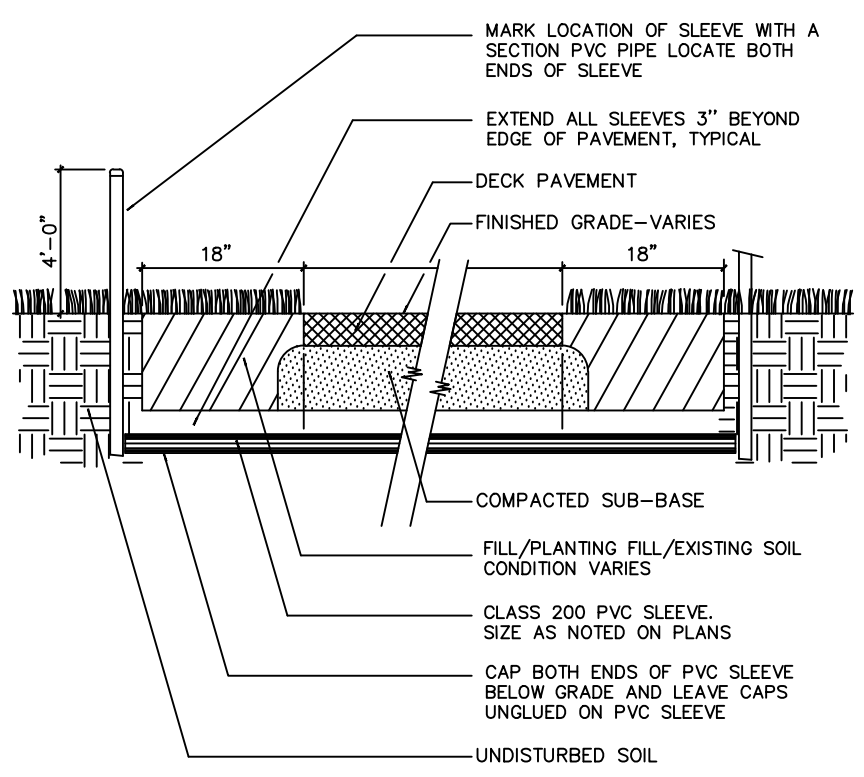


SLEEVE UNDER PAVING

NOT TO SCALE

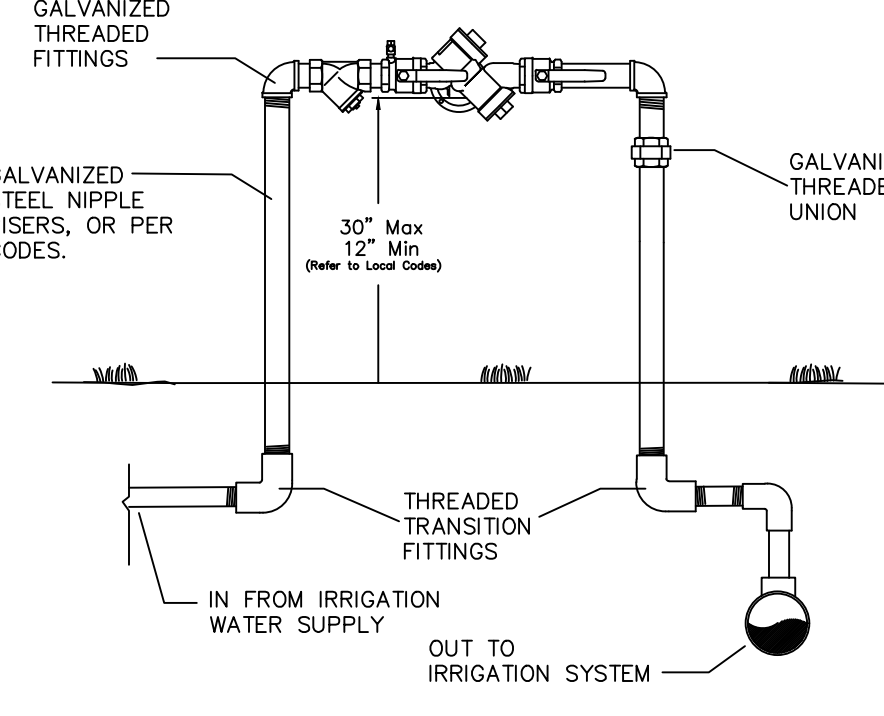


REDUCED PRESSURE BACKFLOW PREVENTER

NOT TO SCALE

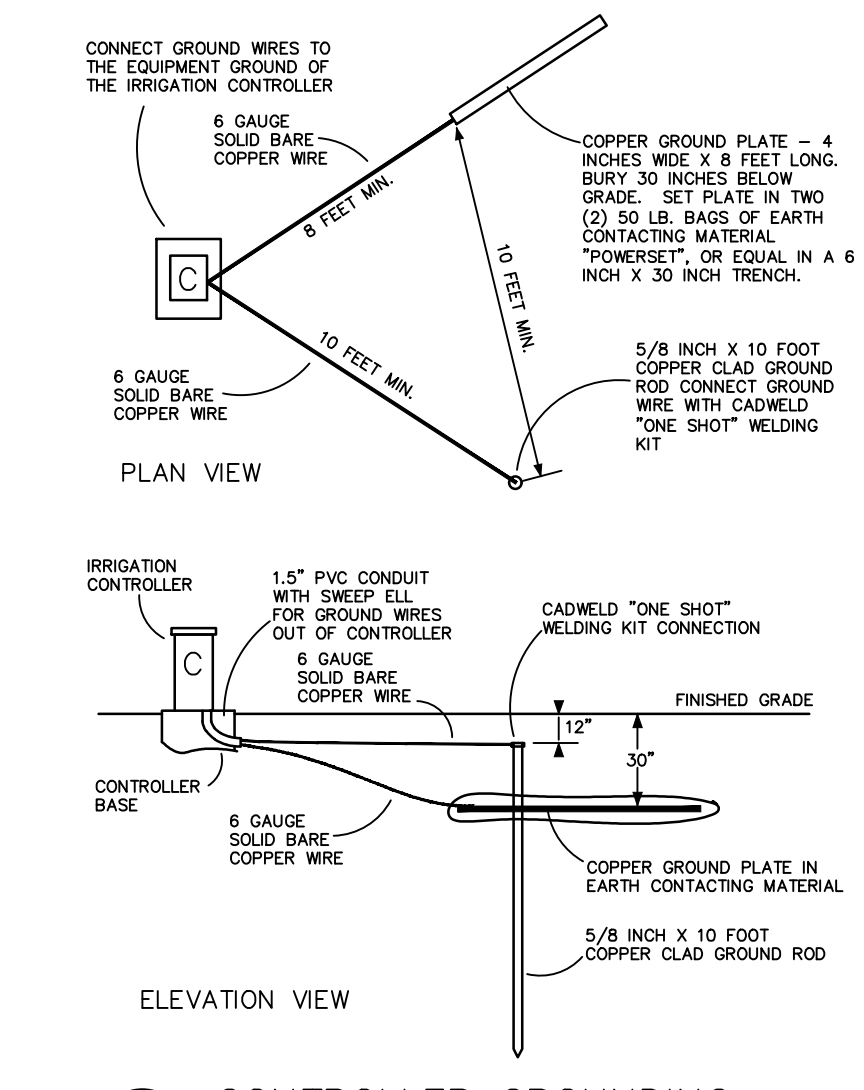


CONTROLLER GROUNDING

NOT TO SCALE

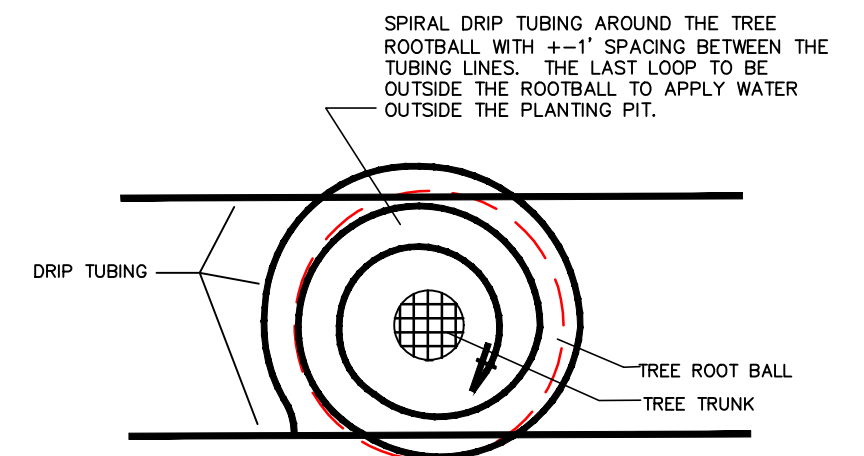

TREE DRIP COIL


NOT TO SCALE

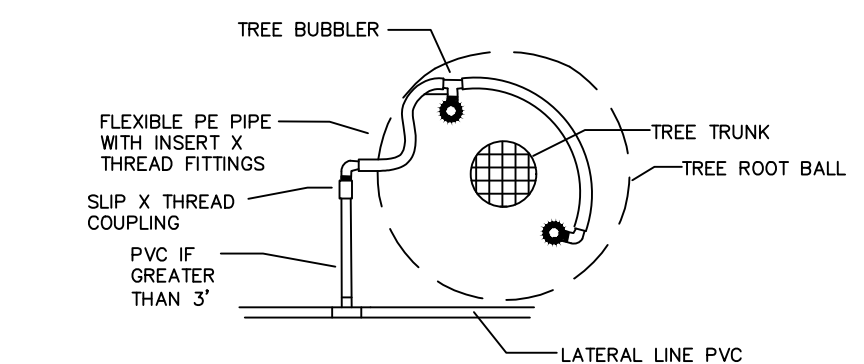

DOUBLE 0.25 GPM TREE BUBBLERS

NOT TO SCALE

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
07.01.2022	75% CD SET
06.14.2024	REVISION 6

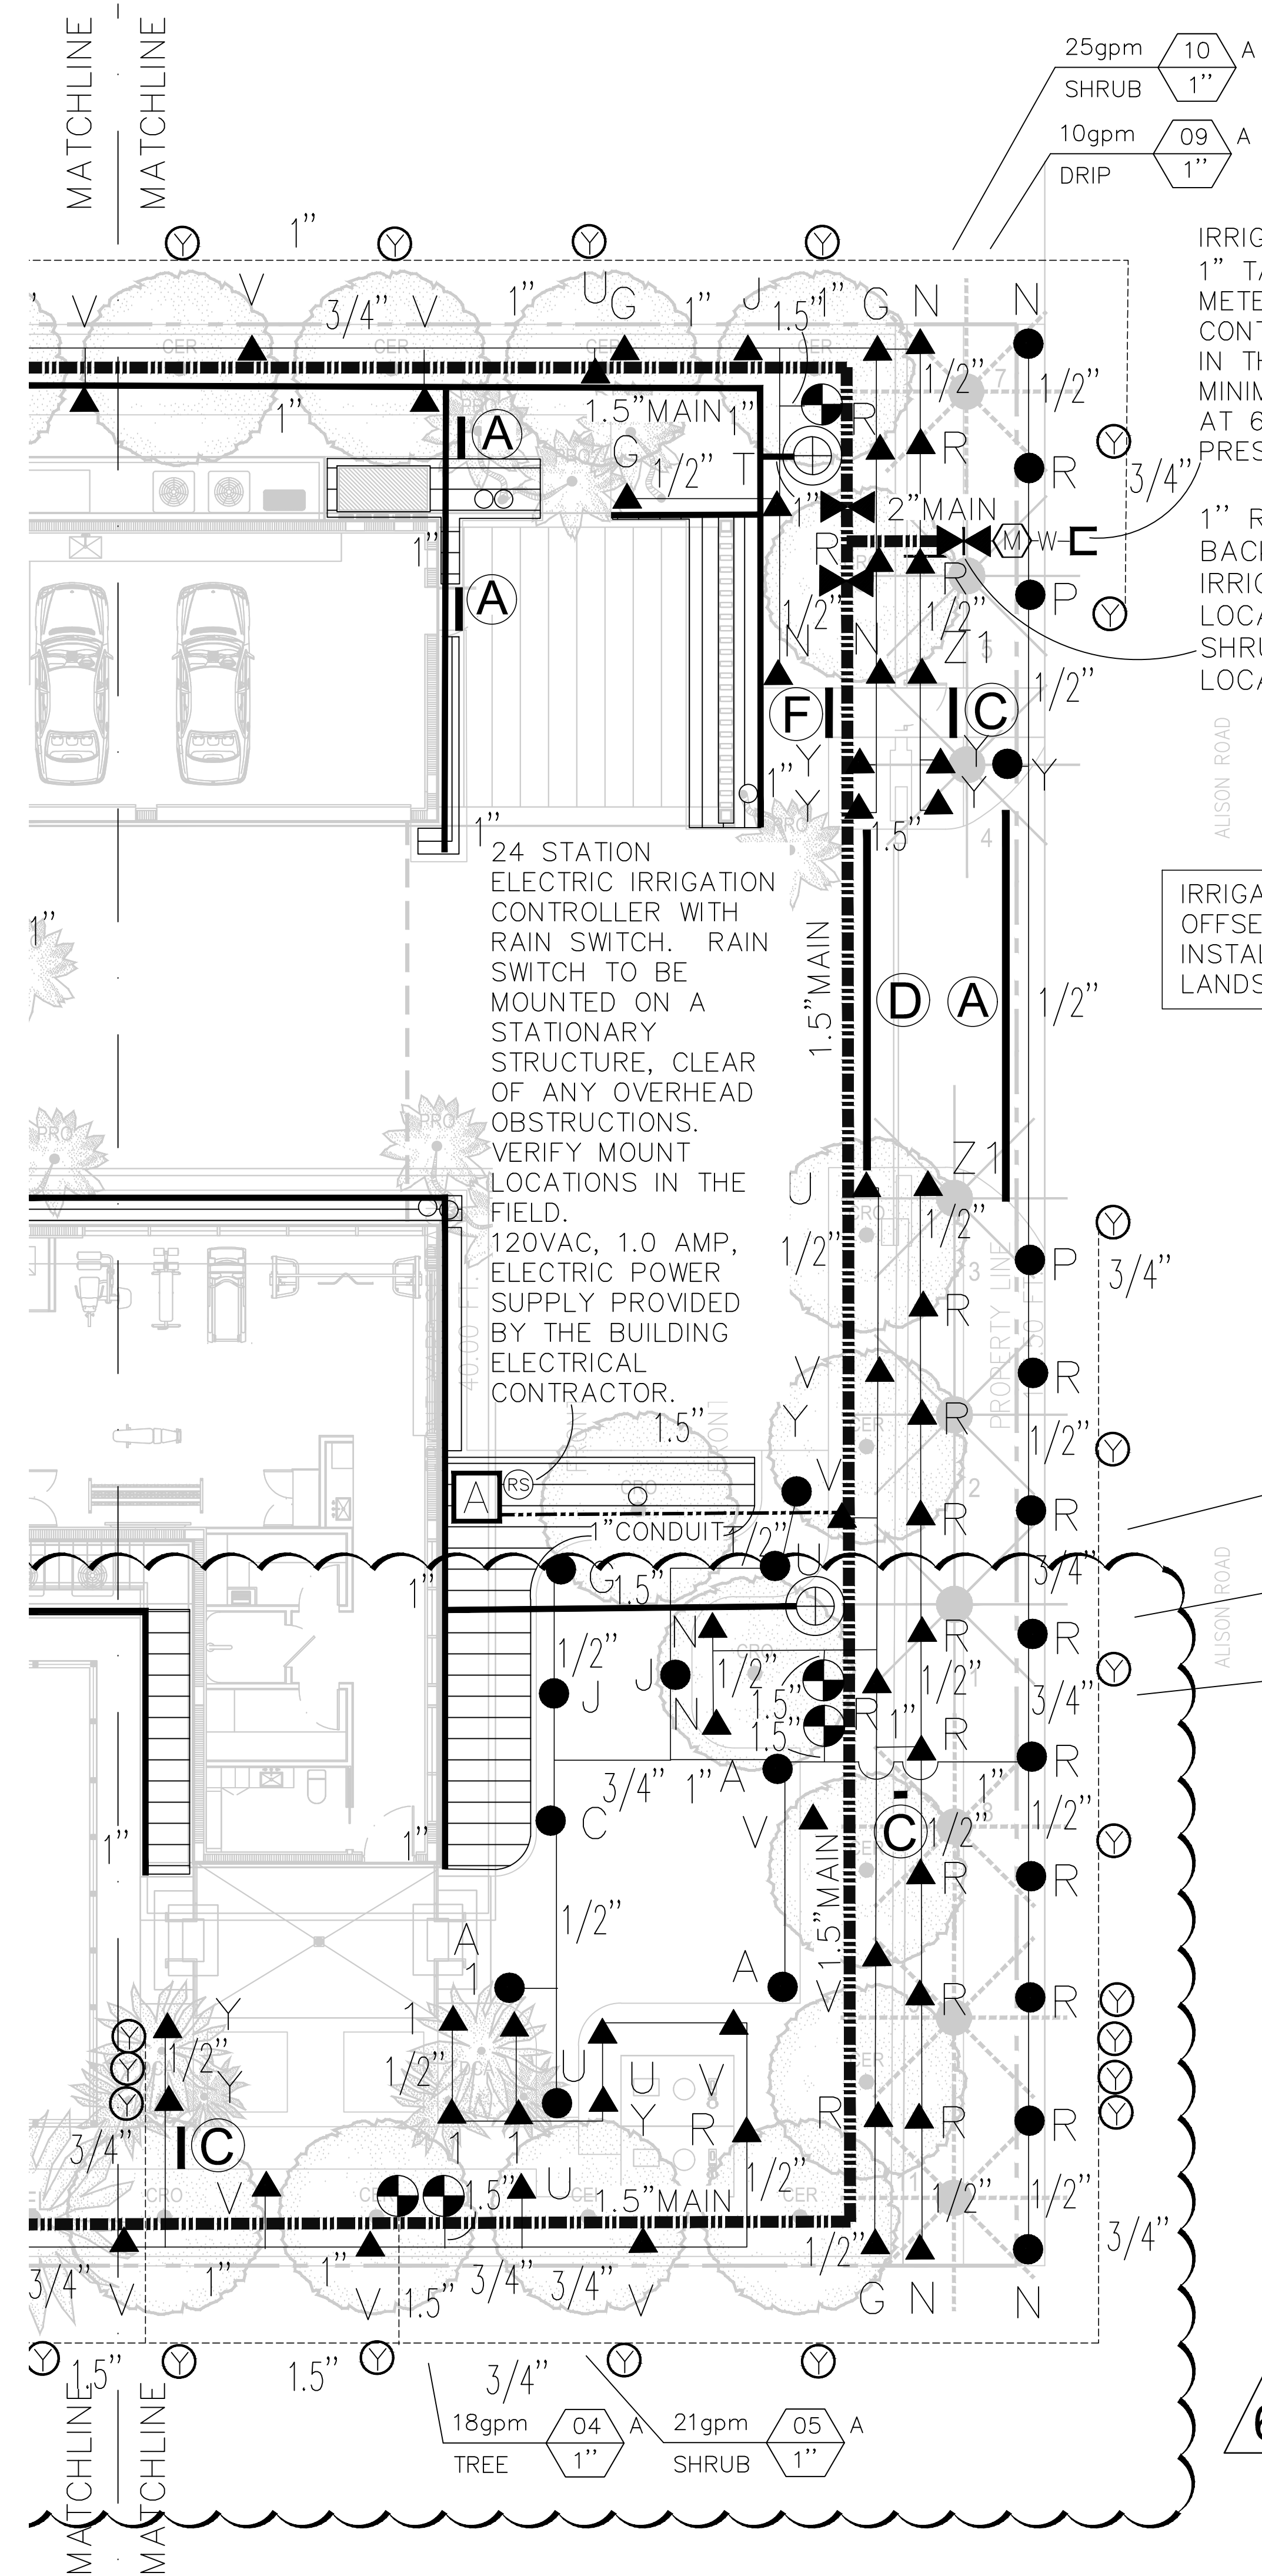

- 25gpm 10 A
- SHRUB 1"
- 10gpm 09 A
- DRIP 1"

IRRIGATION WATER SUPPLY
 1" TAP AND 1" TURBINE WATER
 METER BY SITE UTILITY
 CONTRACTOR. VERIFY LOCATION
 IN THE FIELD.
 MINIMUM FLOW RATE OF 25 GPM
 AT 60 PSI STATIC WATER
 PRESSURE REQUIRED.

1" REDUCED PRESSURE ZONE
 BACKFLOW PREVENTER BY
 IRRIGATION INSTALLER PER
 LOCAL CODES. CONCEAL IN
 SHRUB AREA, VERIFY
 LOCATION IN THE FIELD.

24 STATION
 ELECTRIC IRRIGATION
 CONTROLLER WITH
 RAIN SWITCH. RAIN
 SWITCH TO BE
 MOUNTED ON A
 STATIONARY
 STRUCTURE, CLEAR
 OF ANY OVERHEAD
 OBSTRUCTIONS.
 VERIFY MOUNT
 LOCATIONS IN THE
 FIELD.
 120VAC, 1.0 AMP,
 ELECTRIC POWER
 SUPPLY PROVIDED
 BY THE BUILDING
 ELECTRICAL
 CONTRACTOR.

IRRIGATION EQUIPMENT SHOWN
 OFFSET FOR GRAPHIC CLARITY.
 INSTALL ALL EQUIPMENT IN
 LANDSCAPED AREA.

- 18gpm 08 A
- DRIP 1"
- 19gpm 07 A
- SHURB 1"
- 22gpm 06 A
- TURF 1"

- 18gpm 04 A
- TREE 1"
- 21gpm 05 A
- SHRUB 1"


- SLEEVES SIZE
 LEGEND**
- (A) 2"
 - (B) 4"
 - (C) 2 1/2"
 - (D) 4 1/2"
 - (E) 4 1/4"
 - (F) 4 1/2 1/2"
 - (G) 4 1/4 1/2"
 - (H) 6 1/2 1/2"
 - (I) 6 1/4 1/2"
 - (J) 8 1/4 1/2"

THE SALTER GARDEN
 6770 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

SEAL (MICHAEL L. PREVOST -
 LA0001743)


06.14.2024
 IRRIGATION PLAN - GROUND
 LEVEL

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
07.01.2022	75% CD SET
06.14.2024	REVISION 6

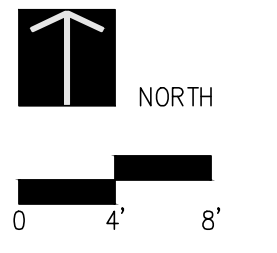

L802


THE SALTER GARDEN
6470 GARDEN | 6470 ALLISON RD. | MIAMI BEACH, FLORIDA 33141

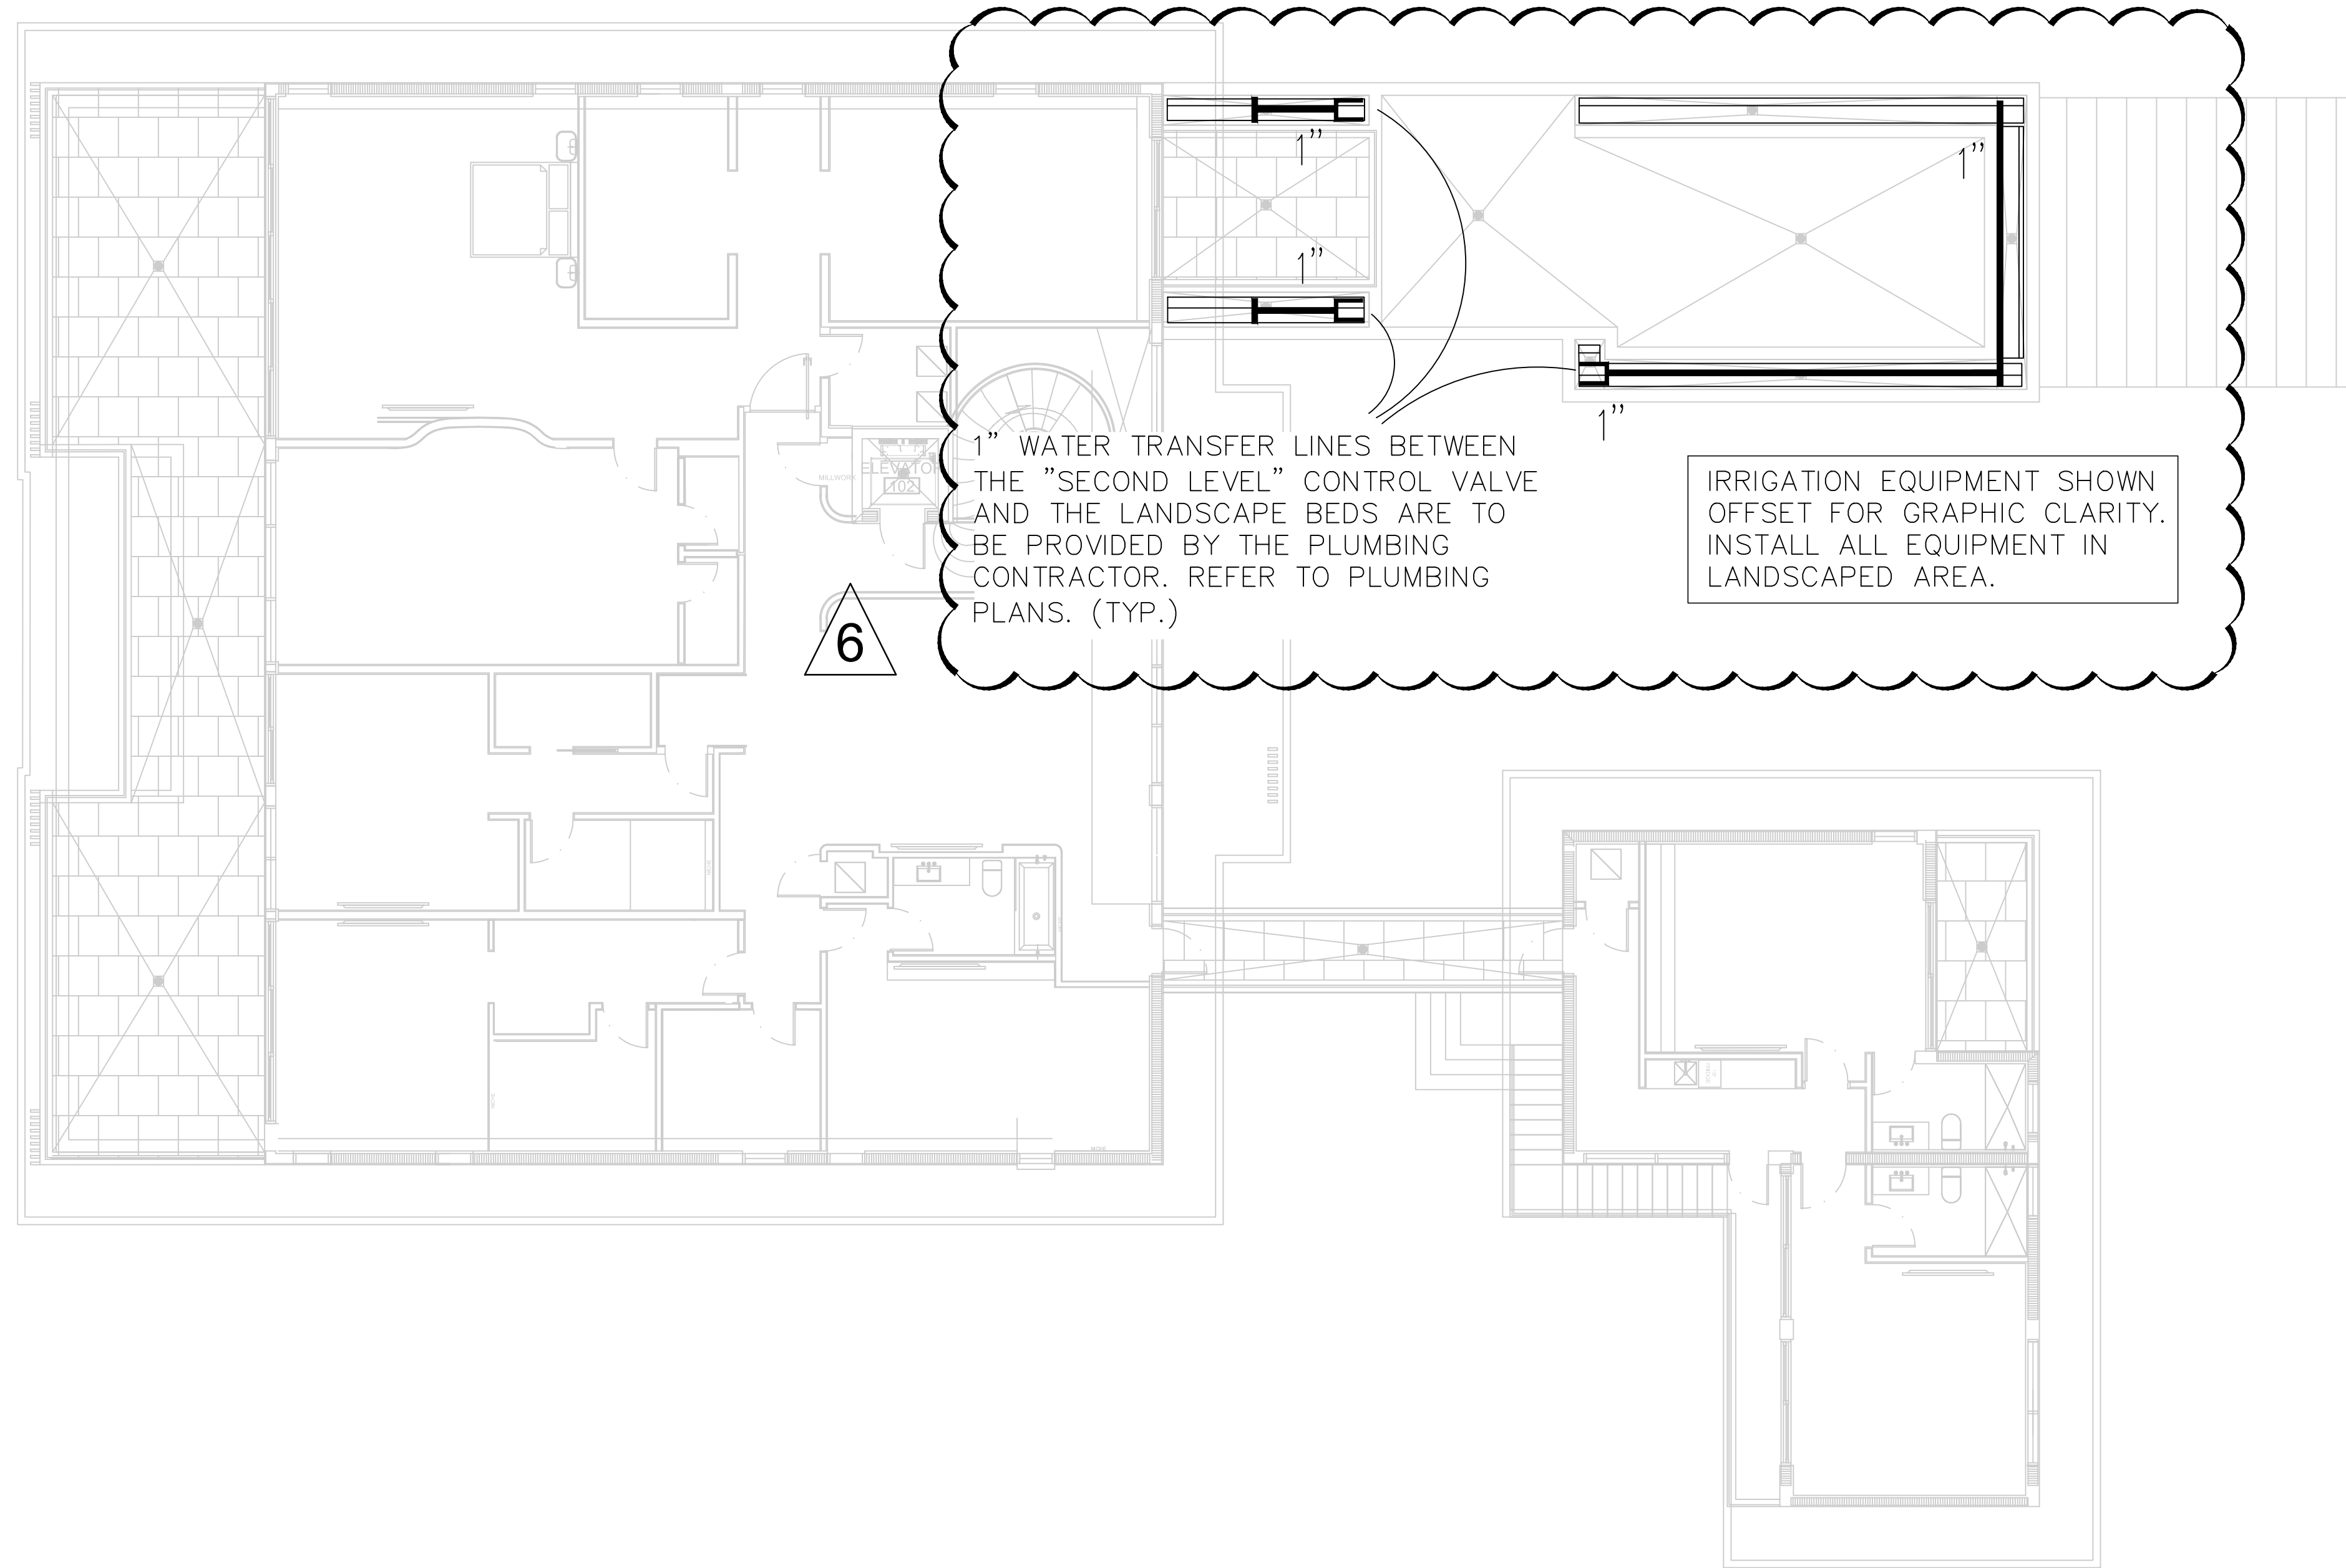

SEAL (MICHAEL L. PREVOST - LA0001743)

06.14.2024
IRRIGATION PLAN - UPPER LEVEL

DATE	ISSUE
03.21.2022	COORDINATION
04.06.2022	REVISION 1
05.13.2022	25% CD SET
07.01.2022	75% CD SET
06.14.2024	REVISION 6

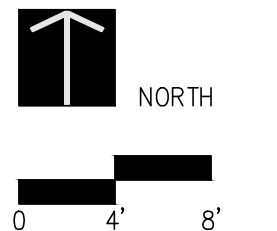

L803